

Material
 Solid PIN: Brass(CuZn), Matte Tin plated ③
 Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus
 Voltage rating: 300V
 Current rating: 10A
 Withstanding Voltage: 1.6KV
 Operating temperature: -40°C to +115°C
 Soldering temperature: 250°C±10°C/5 Sec
 Safety Approval: **UL**us


DIMENSION

Dim C	Nx3.50
Dim B	(N-1)x3.50

N=Number of poles

Poles	DIM C	DIM B
2p-5p	±0.10	±0.10
6p-9p	±0.15	±0.15
10p-13p	±0.20	±0.20
14p-17p	±0.25	±0.25
18p-21p	±0.30	±0.30
22p-24p	±0.40	±0.40

P.C.B. LAYOUT

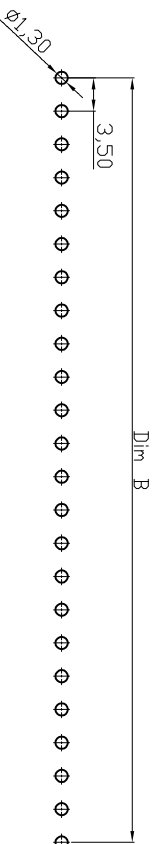

RoHS compliant
 Unit: mm
 File No.: E349947



Scale	Free	Free
TOLERANCE		
X.	±0.50	① Add UL
X.X	±0.30	② Update
X.XX	±0.10	③ Update the plating to Matte Tin
DIM	TOL	④ Drawn
X.°	±1°	⑤ Date
Angle	TOL	⑥ Name

Date	Name	Customer-No.
29.11.2006	Hellwig	ASSMANN WSW-No.
15.03.2016	Amy	A-TB350-OPXX
29.07.2009	Dean	Drawing-No.
29.11.2006	Hellwig	ASS 1149 CO
15.03.2016	Amy	rev04



Replace Sheet

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	B
1	2	3	4	5	6	7	C
1	2	3	4	5	6	7	D
1	2	3	4	5	6	7	E
1	2	3	4	5	6	7	F
1	2	3	4	5	6	7	G
1	2	3	4	5	6	7	H