

TX Type

3.2 x 2.5 mm SMD Voltage Controlled Temperature Compensated Crystal Oscillator


FEATURE

- Typical 3.2 x 2.5 x 0.9 mm SMD.
- For automatic assembly.
- Compactness and lightweight.
- Low power consumption.
- VCTCXO available.
- Low thickness



TYPICAL APPLICATION

- GPS
- WiMAX, WLAN
- Mobile Phone

DIMENSION (mm)

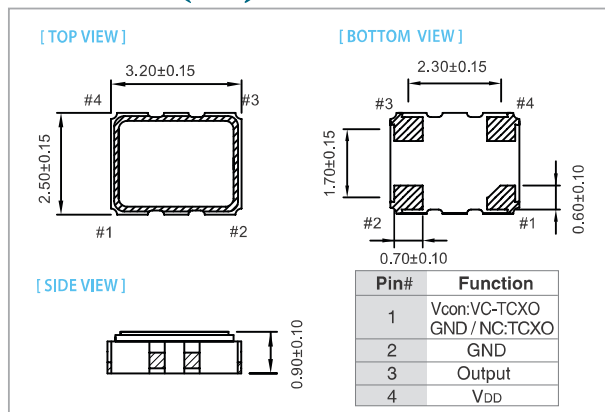

SOLDER PAD LAYOUT (mm)

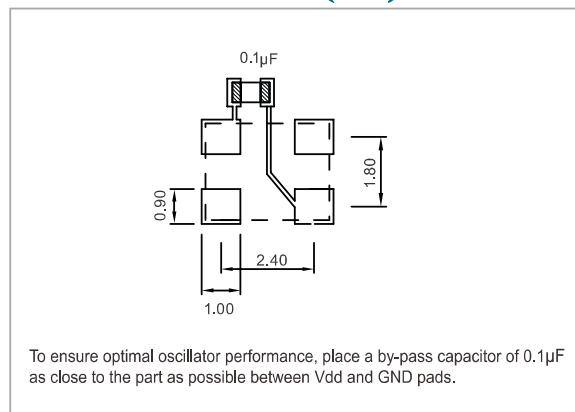

RoHS Compliant

ELECTRICAL SPECIFICATION

| Parameter | 3.3 / 3.0 / 2.8 V | | 2.5 V | | 1.8 V | | Unit |
|----------------------------------|---|--------|----------------------|--------|----------------------|--------|--------|
| | Min. | Max. | Min. | Max. | Min. | Max. | |
| Supply Voltage Variation (VDD) | VDD-5% | VDD+5% | VDD-5% | VDD+5% | VDD-5% | VDD+5% | V |
| Frequency Range | 10 | 52 | 10 | 52 | 10 | 52 | MHz |
| Standard Frequency | 10, 12.8, 13, 16.367667, 16.368, 16.369, 19.2, 19.44, 20, 25, 26, 27, 30, 30.72, 32, 38.4 | | | | | | |
| Frequency Tolerance* | - | ±2.0 | - | ±2.0 | - | ±2.0 | ppm |
| Frequency stability | | | | | | | ppm |
| Vs Supply Voltage (±5%) change | - | ±0.2 | - | ±0.2 | - | ±0.2 | |
| Vs Load (±10%) change | - | ±0.2 | - | ±0.2 | - | ±0.2 | |
| Vs Aging (@ 1st year) | - | ±1.0 | - | ±1.0 | - | ±1.0 | ppm |
| Supply Current | 10 MHz ≤ Fo ≤ 26 MHz | | 10 MHz ≤ Fo ≤ 26 MHz | | 10 MHz ≤ Fo ≤ 26 MHz | | mA |
| | 26 MHz < Fo ≤ 52 MHz | | 26 MHz < Fo ≤ 52 MHz | | 26 MHz < Fo ≤ 52 MHz | | |
| Output Level (Clipped sine wave) | 0.8 | - | 0.8 | - | 0.8 | - | Vp-p |
| Load | 10KΩ//10pF | | 10KΩ//10pF | | 10KΩ//10pF | | |
| Control Voltage Range (VCTCXO) | 0.5 | 2.5 | 0.4 | 2.4 | 0.3 | 1.5 | V |
| Pulling Range (VCTCXO) | ±5.0 | - | ±5.0 | - | ±5.0 | - | ppm |
| Vc Input Impedance (VCTCXO) | 500 | - | 500 | - | 500 | - | kΩ |
| Phase Noise @ 19.2 MHz | 100 Hz | -115 | 100 Hz | -115 | 100 Hz | -115 | dBc/Hz |
| | 1 kHz | -135 | 1 kHz | -135 | 1 kHz | -135 | |
| | 10 kHz | -148 | 10 kHz | -148 | 10 kHz | -148 | |
| Start time | - | 2 | - | 2 | - | 2 | mSec |
| Storage Temp. Range | -40 | 85 | -40 | 85 | -40 | 85 | °C |

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

* Frequency at 25°C, 1 hour after reflow.

FREQ. STABILITY vs. TEMP. RANGE

| Temp. (°C) | ppm | ±0.5 | ±1.0 | ±1.5 | ±2.0 | ±2.5 |
|------------|-----|------|------|------|------|------|
| -20 ~ +70 | | ○ | ○ | ○ | ○ | ○ |
| -30 ~ +85 | | ○ | ○ | ○ | ○ | ○ |
| -40 ~ +85 | | ○ | ○ | ○ | ○ | ○ |

* ○: Available △: Conditional X: Not available

Note: not all combination of options are available. Other specifications may be available upon request.

Specifications subject to change without notice.

Rev(11)02/2017
www.tai tien.com
sales@tai tien.com.tw