

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

1.1 FREQUENCY RANGE: DC to 4.0 GHz

1.2 VSWR: 1.25:1 MAX.

1.3 IMPEDANCE: 50 OHMS

1.4 POWER: 2 WATTS AVG. AT +25°C


DERATED LINEARLY TO 0.5 WATTS AT +125°C

1.5 OPERATING TEMP. RANGE: -54°C to +125°C

2.0 MARKING

2.1 MARK UNIT AS SHOWN:

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

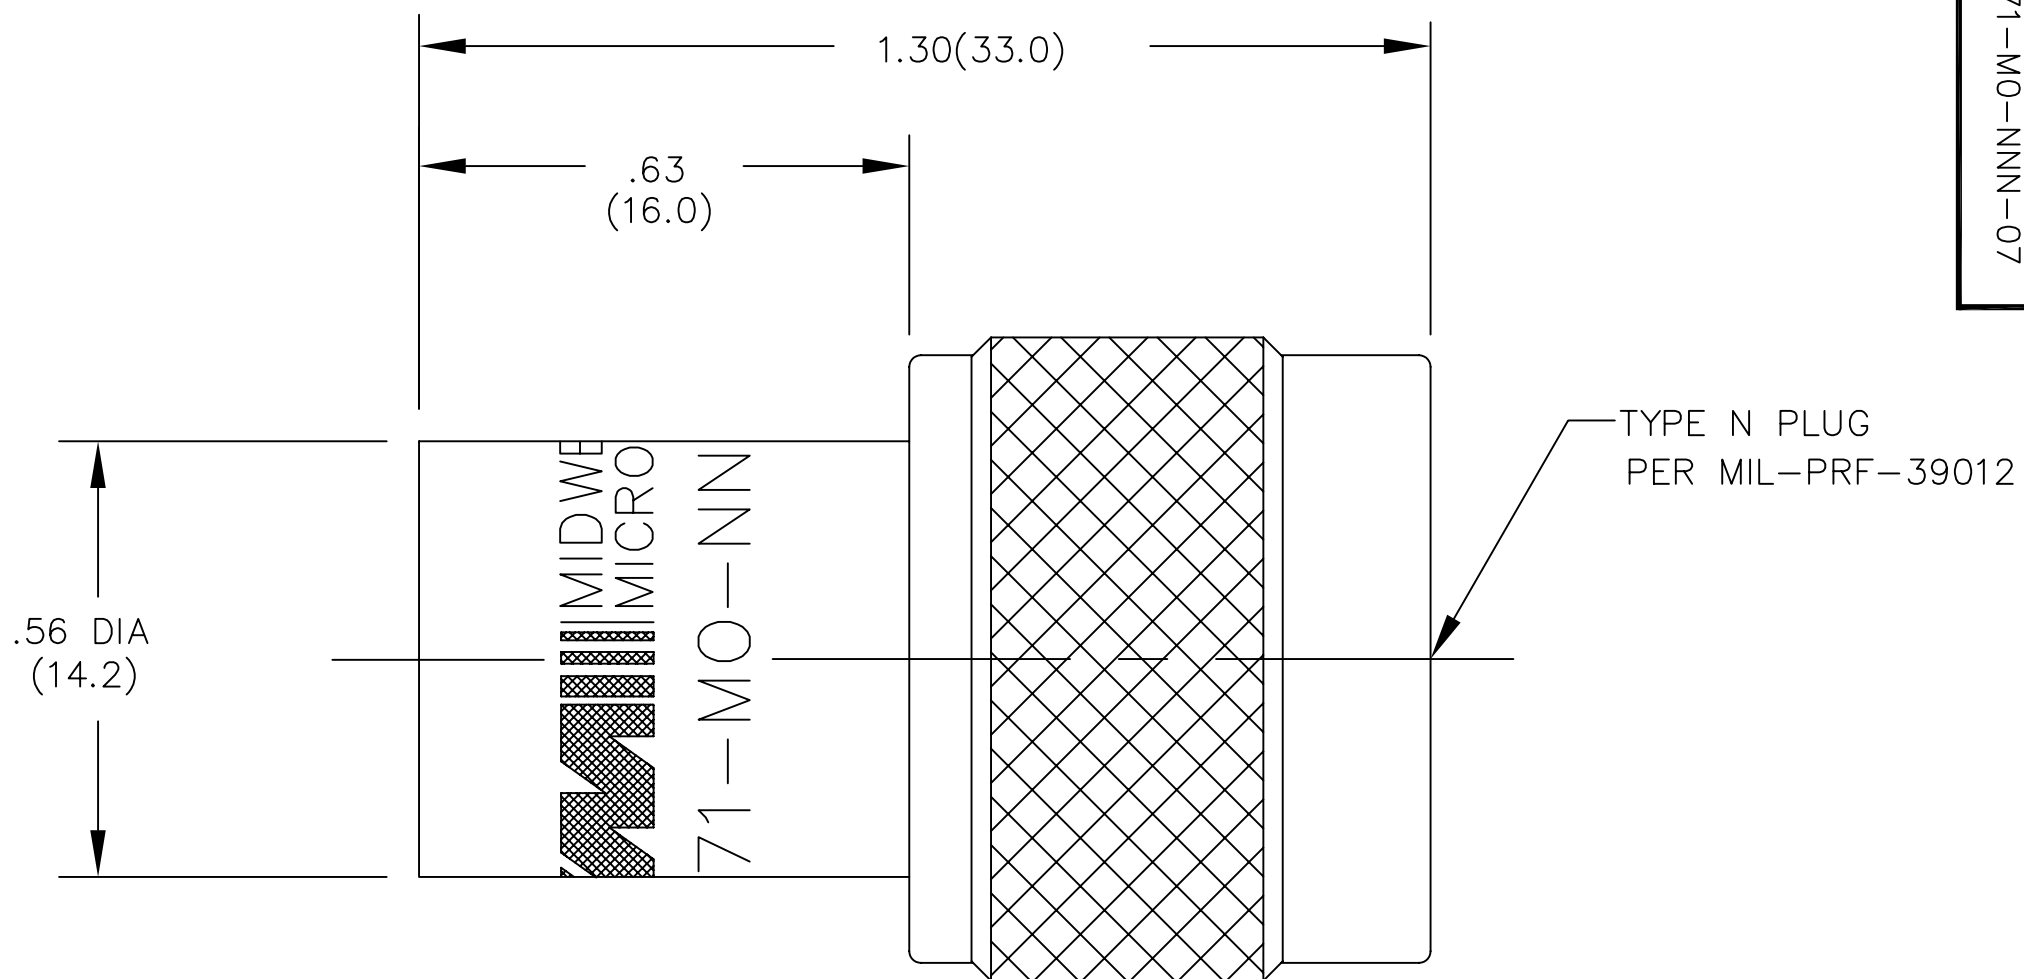

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS ±.005

2 PLACE DECIMALS ±.02

FRACTIONS ±1/64

PARALLELITY: T.I.R. \_\_\_\_\_

FLATNESS: T.I.R. \_\_\_\_\_

CONCENTRICITY: T.I.R. \_\_\_\_\_

ANGLES AND PERPENDICULARITY: ±1'

CAGE CODE

34078

MIDWEST MICROWAVE



**EMERSON**  
Network Power  
Connectivity Solutions

DRAWN/DATE  
A.BEATTY  
8/4/93

ENG./DATE  
G.KOZAK  
8/10/93

CHECKED/DATE  
M.HOLLMAN  
8/6/93

APPROVED/DATE

TITLE

TERMINATION  
OUTLINE DRAWING

DRAWING NUMBER

TRM-2071-M0-NNN-07-01

REV.

C

SCALE: 5=1

SHEET 1 of 1

REV.	DESCRIPTION	DATE
-	RELEASED	8/12/93
-1	ADDED TITLEBLOCK	10/28/05
C	ECO 23006	12/10/10