
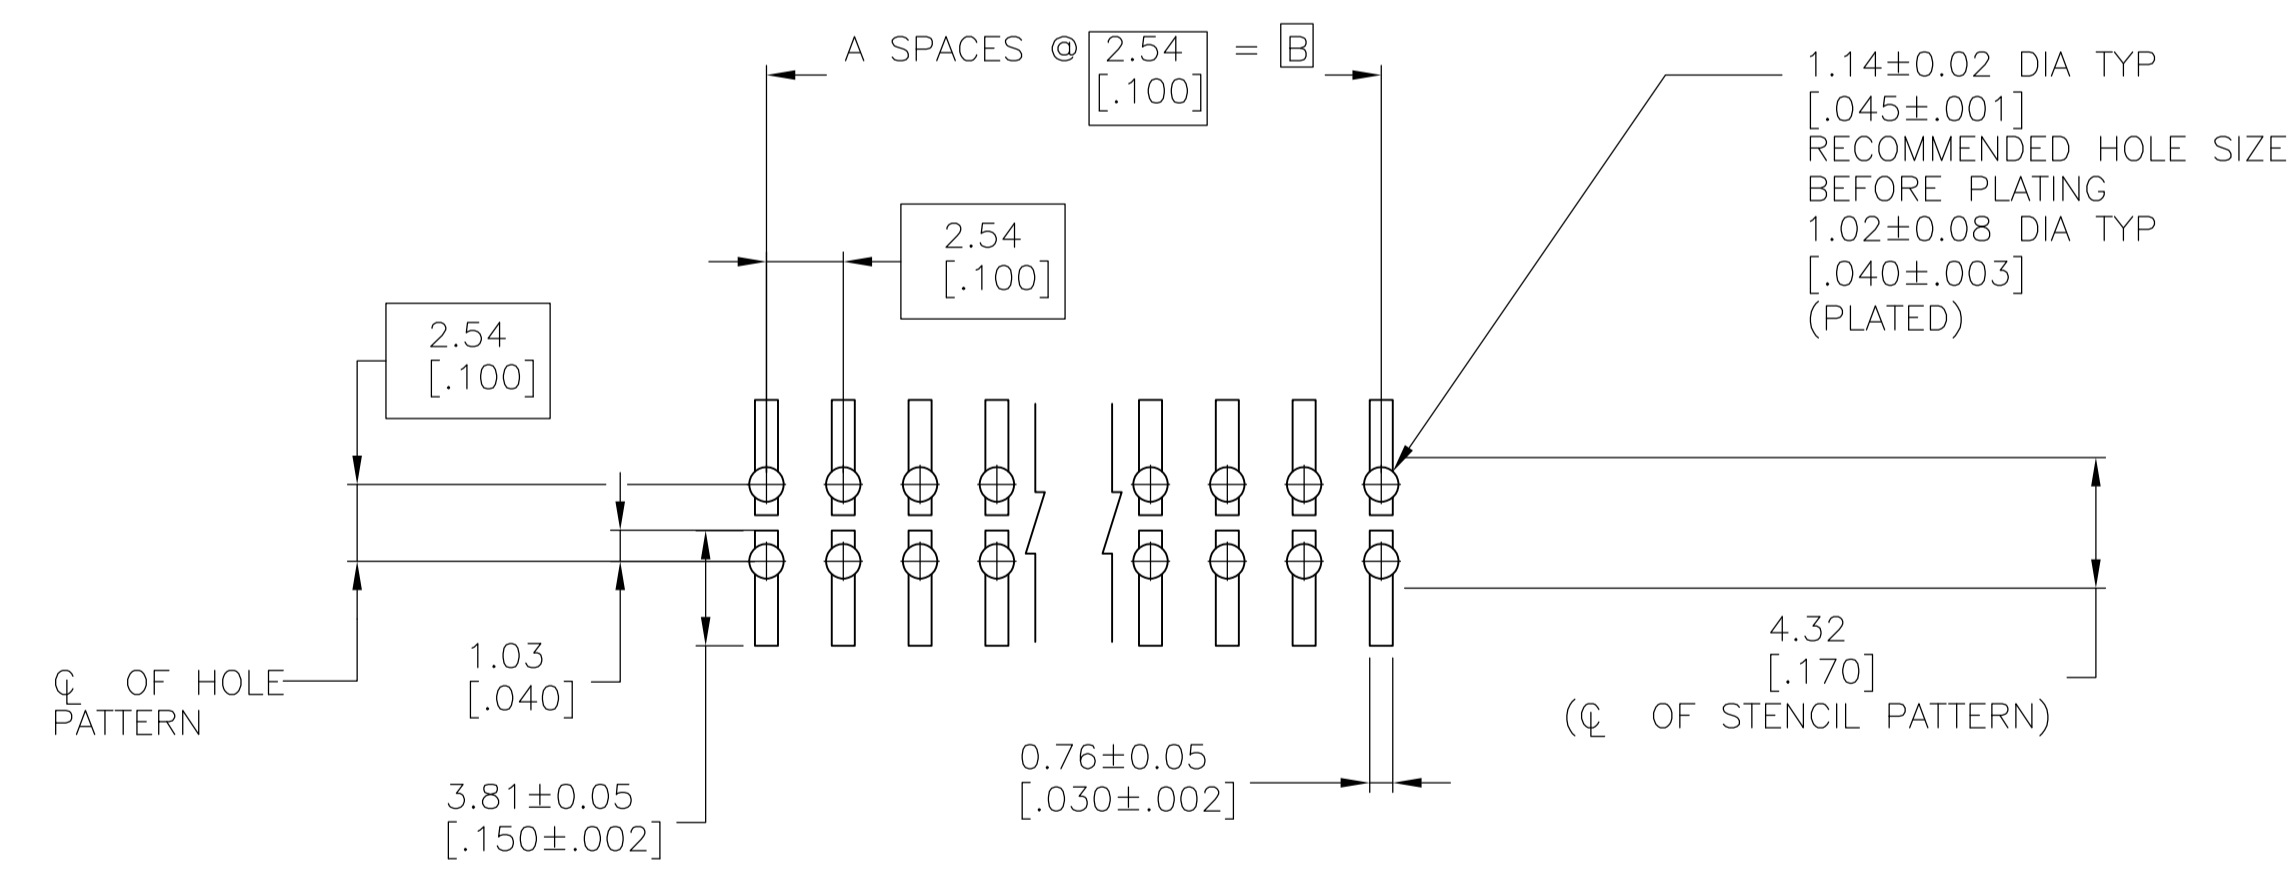
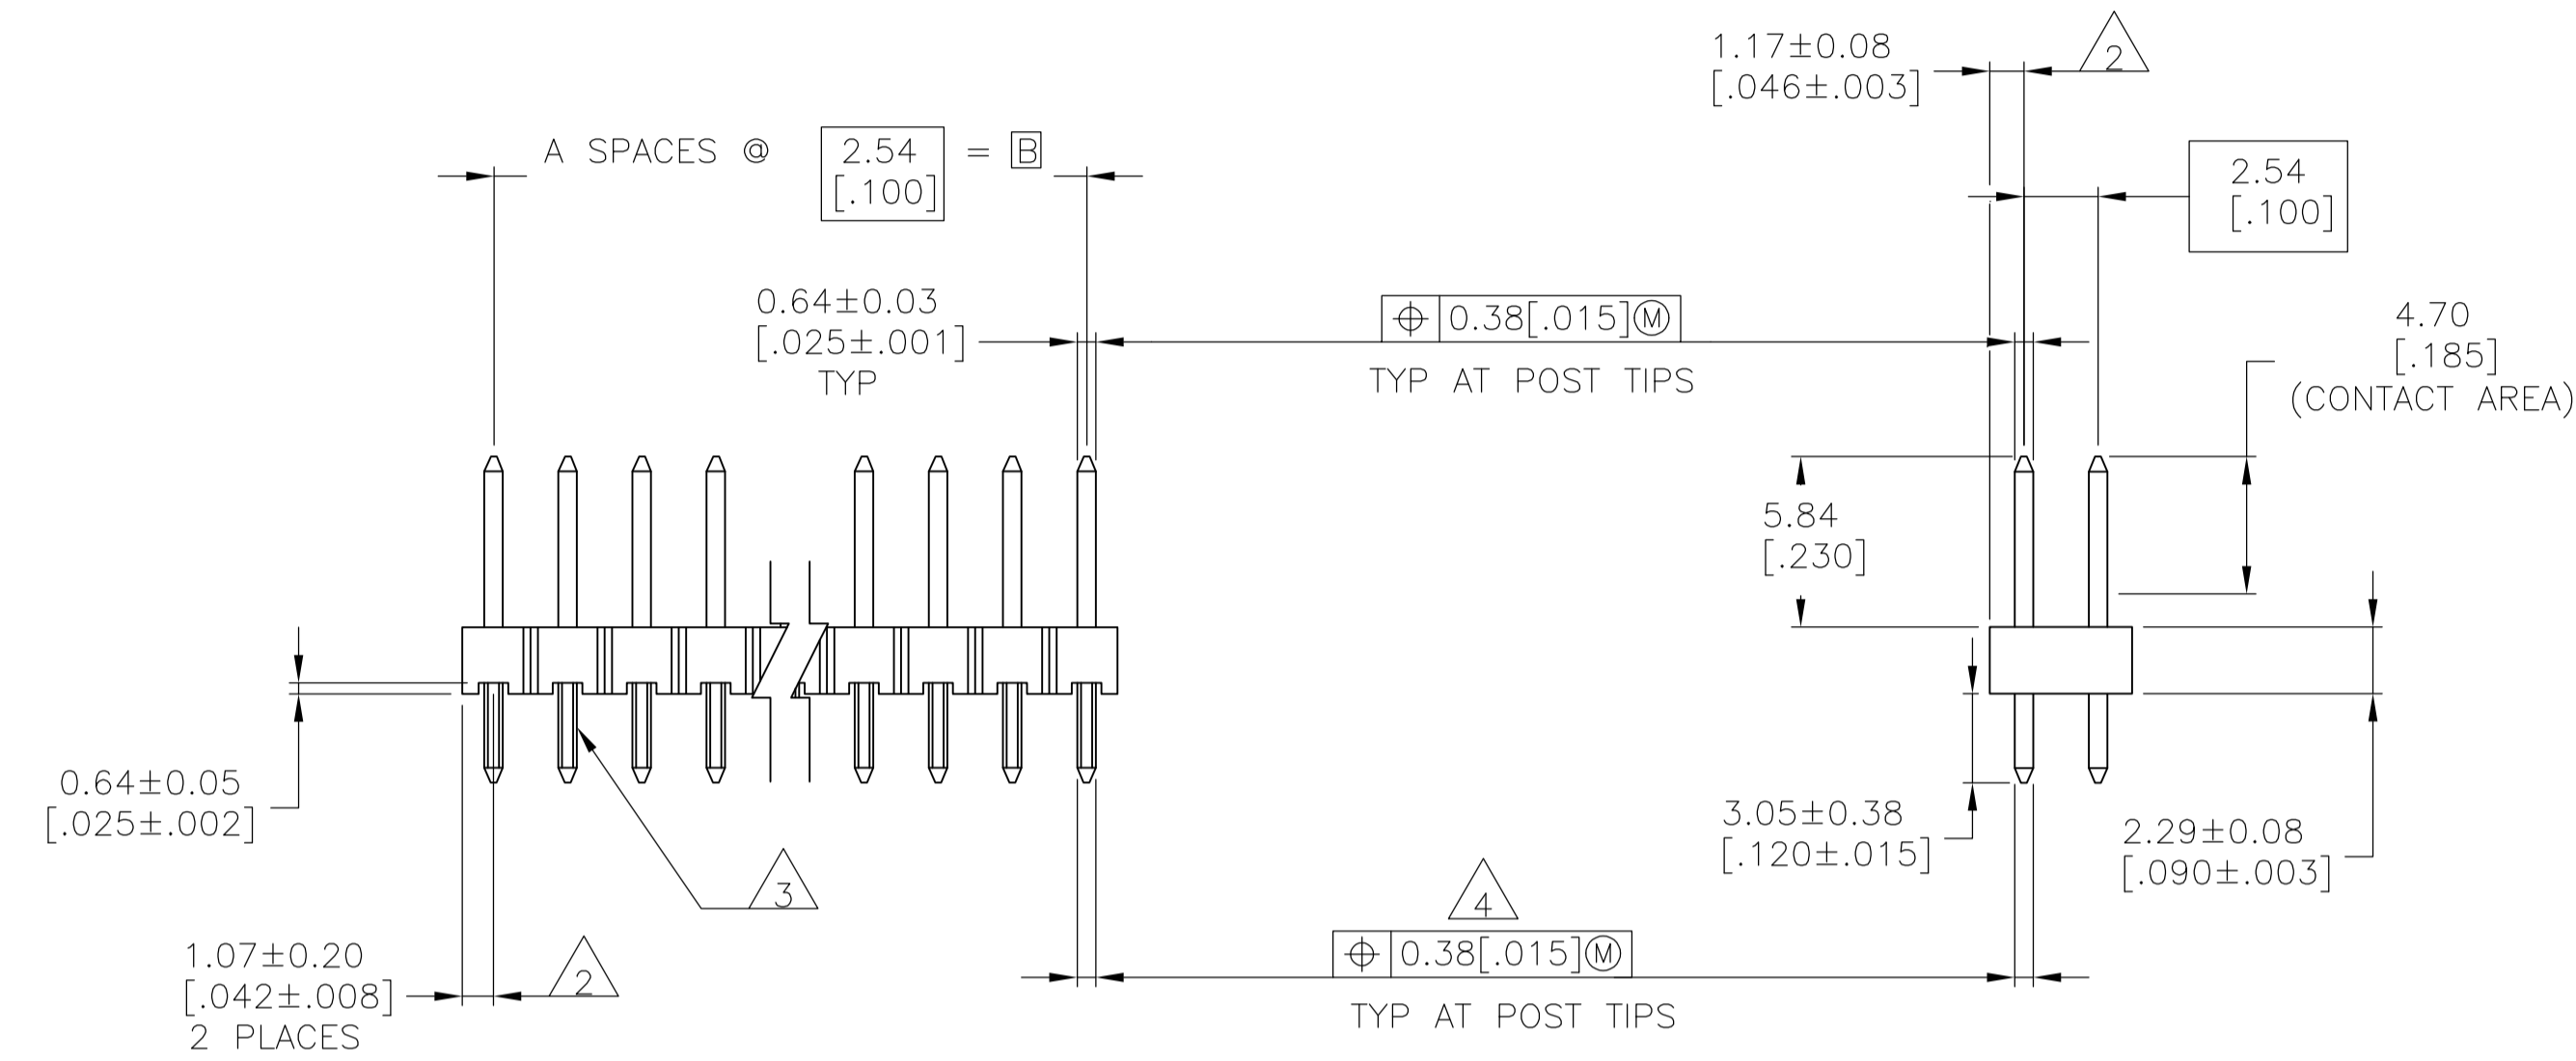


REVISONS		DATE	BY	APPV
G	EC 0G3C 0862 04	25FEB05	BSV	JLG
G1	REVISE PER ECO-10-000443	13JAN10	KK	AEG

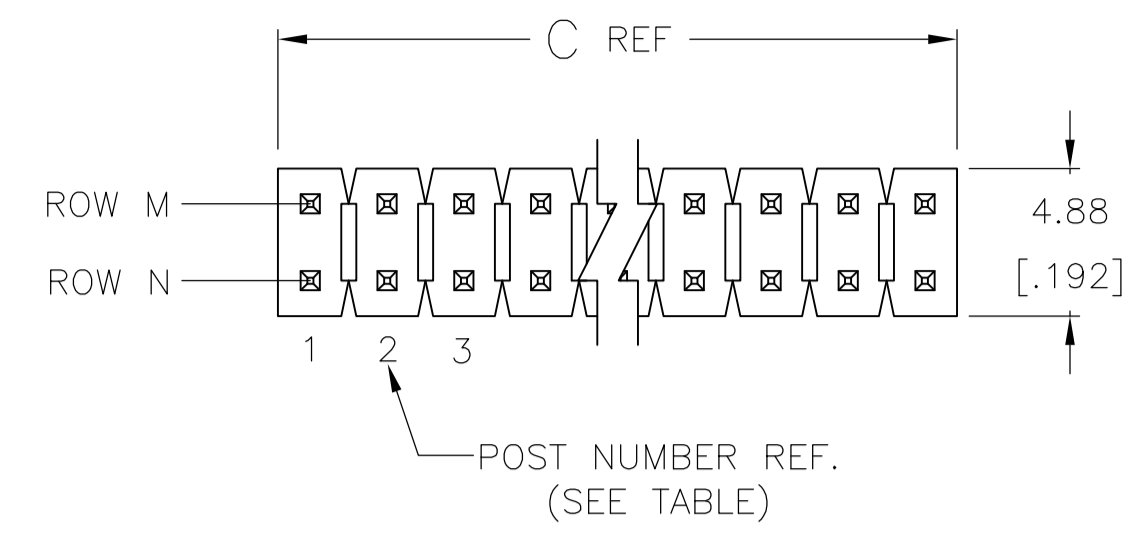

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063[1.60] THICK PC BOARD AND .012[.305] STENCIL THICK

- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- $\phi 0.51[.020]$ FOR KINKED TAILS.
- HOUSING: LCP, COLOR=BLACK. POST: PHOSPHOR BRONZE.
- 0.000381 [.000015] GOLD IN CONTACT AREA, 0.00254-0.00508 [.0000100-.0000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 0.000381 [.000015] GOLD IN CONTACT AREA, 0.00254-0.00508 [.0000100-.0000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- OBSELETE PARTS: OBSELETE CIS STREAMLINING PER D.RENAUD/D.SINISI

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER	PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
Δ	101.19 [3.984]	99.06 [3.900]	39	80	9-146268-0	Δ	101.19 [3.984]	99.06 [3.900]	39	80	4-146268-0
Δ	98.65 [3.884]	96.52 [3.800]	38	78	8-146268-9	Δ	98.65 [3.884]	96.52 [3.800]	38	78	Δ 3-146268-9
Δ	96.11 [3.784]	93.98 [3.700]	37	76	8-146268-8	Δ	96.11 [3.784]	93.98 [3.700]	37	76	Δ 3-146268-8
Δ	93.57 [3.684]	91.44 [3.600]	36	74	8-146268-7	Δ	93.57 [3.684]	91.44 [3.600]	36	74	Δ 3-146268-7
Δ	91.03 [3.584]	88.90 [3.500]	35	72	8-146268-6	Δ	91.03 [3.584]	88.90 [3.500]	35	72	Δ 3-146268-6
Δ	88.49 [3.484]	86.36 [3.400]	34	70	8-146268-5	Δ	88.49 [3.484]	86.36 [3.400]	34	70	Δ 3-146268-5
Δ	85.95 [3.384]	83.82 [3.300]	33	68	8-146268-4	Δ	85.95 [3.384]	83.82 [3.300]	33	68	Δ 3-146268-4
Δ	83.41 [3.284]	81.28 [3.200]	32	66	8-146268-3	Δ	83.41 [3.284]	81.28 [3.200]	32	66	Δ 3-146268-3
Δ	80.87 [3.184]	78.74 [3.100]	31	64	8-146268-2	Δ	80.87 [3.184]	78.74 [3.100]	31	64	Δ 3-146268-2
Δ	78.33 [3.084]	76.20 [3.000]	30	62	8-146268-1	Δ	78.33 [3.084]	76.20 [3.000]	30	62	Δ 3-146268-1
Δ	75.79 [2.984]	73.66 [2.900]	29	60	8-146268-0	Δ	75.79 [2.984]	73.66 [2.900]	29	60	Δ 3-146268-0
Δ	73.25 [2.884]	71.12 [2.800]	28	58	7-146268-9	Δ	73.25 [2.884]	71.12 [2.800]	28	58	Δ 2-146268-9
Δ	70.71 [2.784]	68.58 [2.700]	27	56	7-146268-8	Δ	70.71 [2.784]	68.58 [2.700]	27	56	Δ 2-146268-8
Δ	68.17 [2.684]	66.04 [2.600]	26	54	7-146268-7	Δ	68.17 [2.684]	66.04 [2.600]	26	54	Δ 2-146268-7
Δ	65.63 [2.584]	63.5 [2.500]	25	52	7-146268-6	Δ	65.63 [2.584]	63.5 [2.500]	25	52	Δ 2-146268-6
Δ	63.09 [2.484]	60.96 [2.400]	24	50	7-146268-5	Δ	63.09 [2.484]	60.96 [2.400]	24	50	Δ 2-146268-5
Δ	60.55 [2.384]	58.42 [2.300]	23	48	7-146268-4	Δ	60.55 [2.384]	58.42 [2.300]	23	48	Δ 2-146268-4
Δ	58.01 [2.284]	55.88 [2.200]	22	46	7-146268-3	Δ	58.01 [2.284]	55.88 [2.200]	22	46	Δ 2-146268-3
Δ	55.47 [2.184]	53.34 [2.100]	21	44	7-146268-2	Δ	55.47 [2.184]	53.34 [2.100]	21	44	Δ 2-146268-2
Δ	52.93 [2.084]	50.80 [2.000]	20	42	7-146268-1	Δ	52.93 [2.084]	50.80 [2.000]	20	42	Δ 2-146268-1
Δ	50.39 [1.984]	48.26 [1.900]	19	40	7-146268-0	Δ	50.39 [1.984]	48.26 [1.900]	19	40	Δ 2-146268-0
Δ	47.85 [1.884]	45.72 [1.800]	18	38	6-146268-9	Δ	47.85 [1.884]	45.72 [1.800]	18	38	Δ 1-146268-9
Δ	45.31 [1.784]	43.18 [1.700]	17	36	6-146268-8	Δ	45.31 [1.784]	43.18 [1.700]	17	36	Δ 1-146268-8
Δ	42.77 [1.684]	40.64 [1.600]	16	34	6-146268-7	Δ	42.77 [1.684]	40.64 [1.600]	16	34	Δ 1-146268-7
Δ	40.23 [1.584]	38.10 [1.500]	15	32	6-146268-6	Δ	40.23 [1.584]	38.10 [1.500]	15	32	Δ 1-146268-6
Δ	37.69 [1.484]	35.56 [1.400]	14	30	6-146268-5	Δ	37.69 [1.484]	35.56 [1.400]	14	30	Δ 1-146268-5
Δ	35.15 [1.384]	33.02 [1.300]	13	28	6-146268-4	Δ	35.15 [1.384]	33.02 [1.300]	13	28	Δ 1-146268-4
Δ	32.61 [1.284]	30.48 [1.200]	12	26	6-146268-3	Δ	32.61 [1.284]	30.48 [1.200]	12	26	Δ 1-146268-3
Δ	30.07 [1.184]	27.94 [1.100]	11	24	6-146268-2	Δ	30.07 [1.184]	27.94 [1.100]	11	24	Δ 1-146268-2
Δ	27.53 [1.084]	25.40 [1.000]	10	22	6-146268-1	Δ	27.53 [1.084]	25.40 [1.000]	10	22	Δ 1-146268-1
Δ	24.99 [.984]	22.86 [.900]	9	20	6-146268-0	Δ	24.99 [.984]	22.86 [.900]	9	20	Δ 1-146268-0
Δ	22.45 [.884]	20.32 [.800]	8	18	5-146268-9	Δ	22.45 [.884]	20.32 [.800]	8	18	Δ 1-146268-9
Δ	19.91 [.784]	17.78 [.700]	7	16	5-146268-8	Δ	19.91 [.784]	17.78 [.700]	7	16	Δ 1-146268-8
Δ	17.37 [.684]	15.24 [.600]	6	14	5-146268-7	Δ	17.37 [.684]	15.24 [.600]	6	14	Δ 1-146268-7
Δ	14.83 [.584]	12.70 [.500]	5	12	5-146268-6	Δ	14.83 [.584]	12.70 [.500]	5	12	Δ 1-146268-6
Δ	12.29 [.484]	10.16 [.400]	4	10	5-146268-5	Δ	12.29 [.484]	10.16 [.400]	4	10	Δ 1-146268-5
Δ	9.75 [.384]	7.62 [.300]	3	8	5-146268-4	Δ	9.75 [.384]	7.62 [.300]	3	8	146268-4
Δ	7.21 [.284]	5.08 [.200]	2	6	5-146268-3	Δ	7.21 [.284]	5.08 [.200]	2	6	146268-3
Δ	4.67 [.184]	2.54 [.100]	1	4	5-146268-2	Δ	4.67 [.184]	2.54 [.100]	1	4	Δ 146268-2
Δ	2.13 [.084]	[-]	-	2	5-146268-1	Δ	2.13 [.084]	[-]	-	2	Δ 146268-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	0.51[.02]
2 PLC	±	0.127[.005]
3 PLC	±	0.0127[.0005]
4 PLC	±	0.0127[.0005]
ANGLES	±	-

MATERIAL: Δ 5

FINISH: SEE TABLE

APPROVED: T. HOFFMAN, G. DUBNICZKI

NAME: G. DUBNICZKI

APPLICATION SPEC: -

WEIGHT: -

CUSTOMER DRAWING

TYCO ELECTRONICS Corporation, Harrisburg, Pa 17105-3608

HEADER ASSEMBLY, MOD II, BREAKAWAY, DOUBLE ROW, .100 X.100 CL, VERTICAL, WITH RETENTION FEATURE, .025 SQ.POSTS, HIGH TEMPERATURE

SIZE: A1, CASE CODE: 00779, DRAWING NO: 146268, RESTRICTED TO: -

SCALE: 4:1, SHEET: 1 OF 1, REV: G1