

NOTES:	901-10129	REVISIONS			
I. MATERIALS AND FINISHES:	DRAWING NO.	REV DESCRIPTION	DATE	ECO	APPR
BODY - BRASS, GOLD FLASH PLATING (.000010 MIN) OVER NICKEL (.000080 MIN) OVER COPPER STRIKE CONTACT - BERYLLIUM COPPER, GOLD PLATING (.000030 MIN THICK)	THIRD ANGLE PROJ. \oplus	A RELEASE TO MFG.		44734	JML
INSULATOR - PTFE	* 7	B CABLE STRIP .225 WAS .350, .134 WAS .256		45140	
	DR . 134 DIELECTRIC & BRA E STRIPPING DIMENSIC CALE 10.000		SCALE	3.000	
.577	. 271	RECOMMENDED MOUNTING HOLE DIMENSIONS SCALE 6.000	. 240		
		F]		

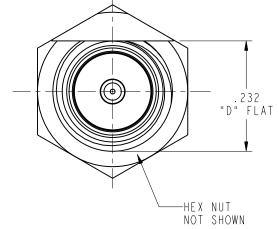

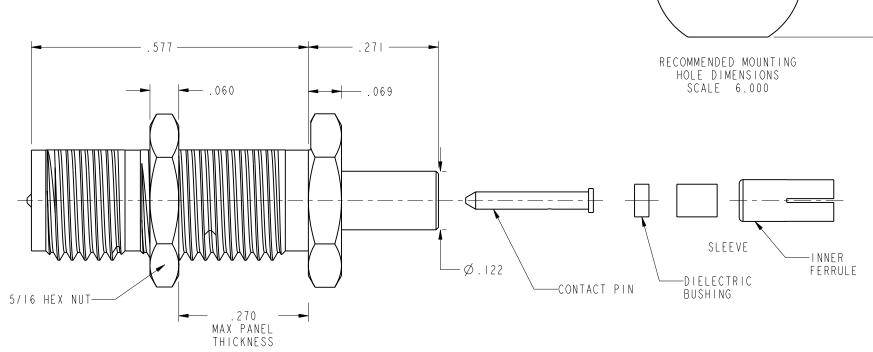

CUSTOMER OUTLINE DRAWING ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL SEE NOTES	DRAWN J LEBLANC	DATE 10/17/03	REVERSE POLARITY	Amphenol RF Danbury, CT, USA
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they	REFERENCE	ENGINEER J LEBLANC	DATE 10/17/03	SMA BULKHEAD TO	Tainan, Taiwan Shenzhen, China
are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting	EAR# 1144 GEN# ASSYF65_SMA	APPROVED O. BARTHELMES	DATE 12/11/03	- I.I3 MM CABLE	www.amphenolrf.com SCALE: 5.0:1 SHEET 2 OF 2
rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	615X-1989-100	CAD FILE 1:\SMA\901-10129		CODE ID DWG SIZEDRAWING N	REV B