
THIS DRAWING AND THE INFORMATION SET FORTH HEREON ARE THE PROPERTY OF TYCO ELECTRONICS CORPORATION AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, DUPLICATION, DISCLOSURE OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY TYCO ELECTRONICS CORPORATION IS PROHIBITED.

REVISION				
REV	DESCRIPTION	DATE		
Ε	REVISED PER DCR MP03088	4/28/03		

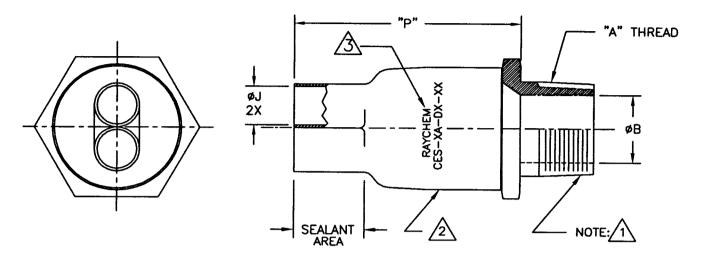

PART A	_"A"	øΒ	ø٦		Р
PART 1	NATIONAL PIPE THREAD	±.02	MIN EXP	MAX REC	RÉF REC
CES-2A-D1-XX	3/4 -14	.75 [19,05]	.40 [10,16]	.11 [2,79]	2.25 [57,15]
CES-3A-D1-XX	1-11 1/2	1.01 [25,66]	.60 [15,24]	.17 [4,31]	3.15 [80,01]
CES-3A-D2-XX	1 1/2-11 1/2	1.10 [27,94]	.60 [15,24]	.17 [4,31]	3.35 [85,09]
CES-4A-D3-XX	1 1/2-11 1/2	1.47 [37,34]	.90 [22,86]	.30 [7,62]	3.75 [95,25]

NOTES:

1 THE LAST "XX" IN THE PART NUMBER DESIGNATES MATERIAL AS SHOWN BELOW:

"AL": ALUMINUM 6061 T-6 WITH FINISH OF HARD ANODIZE PER MIL-A-8625, TYPE III, CLASS 2, DYED BLACK.

"SS": STAINLESS STEEL TYPE 316, WITH FINISH OF PASSIVATE PER QQ-P-35, OR MIL-S-5002 FOR STANDARD BLACK NYLON MATERIAL, OMIT THE LAST "XX" IN THE PART NO.

 $\sqrt{2}$ HEAT SHRINKABLE BOOT MATERIAL IN ACCORDANCE WITH -3 POLYOLEFIN

3. PART TO BE MARKED AS SHOWN, REPLACE X WITH APPROPRIATE CHARACTERS (IE: CES-3A-D1-AL)

4. FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD.

SPECIFICATION CONTROL DRAWING						
Tyco Electronics Corpor 300 Constitution Drive Menio Park, CA. USA 9	Barraham					
CABLE ENTRY SEALS 2 ENTRY, NPT THREADED						
SEZE COOE 1954T, NO. DWG. NO. A 06090	CES-XA-DX-XX					
DO NOT SCALE THIS DRAWING	SHEET 1 OF 1					