

SUMMARY

Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	0A
Termination type	Male solder
IP rating	50
Cable Ø	2.50 - 2.80 mm
Matching parts	ERA.0A.250.CTL
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FFA*: Straight plug with cable collet and nut for fitting a bend relief
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C29: 2.5 - 2.8 mm
Variant	Z : Nut for fitting a bend relief

Performance

Configuration	0.25 : 1 Coax (50 Ohm)
Insulator	
Rated Current	

Specifications


Contact Type:	Coaxial 50 Ohm (Solder)
Max. Matings:	1000

Others

IP Rating:	50
------------	----

DRAWINGS

Draws

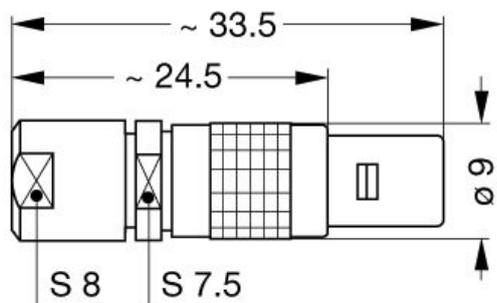

Dimensions

	A	B	L	M	S1	S2
mm.	9	9	37	27.5	7.5	7
in.	0,35	0,35	1,46	1,08	0,30	0,28

RECOMMENDED BY LEMO

Tools

None

Cables