

NOTE:

1.Material :

Terminal : Brass C2680-1/2H (HV120~140) , T=0.2±0.02mm.

Shell : Brass , T=0.5±0.02mm.

Housing : LCP (E1301)+30% G.F. (UL94-0), Black.

2.Plating :

Terminal: Au plated on contact area (see order information),
100u" Sn plated on solder tail area,


both over 50u" min. Ni underplated overall.

Shell : Gold Flash overall.

3.Mechanical Characteristics:

Insertion force : 4.5Kgf max.

Withdrawing force : 1Kgf ~ 4Kgf.

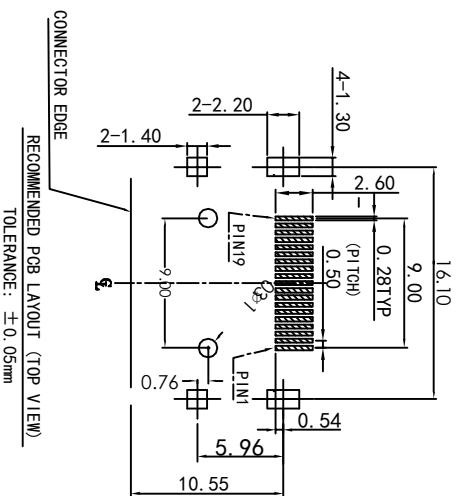

2017/04/06	Jody		Structural changes	A1
2012/03/06	XIE		NEW DWG	A0
DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK
				VER.
-TOLERANCES- UNLESS OTHERWISE SPECIFIED			CnC Tech,LLC	
X.X	±0.25	X.X°		±3.00°
X.XX	±0.20	X.XX°	±1.00°	CHECK:
X.XXX	±0.15	X.XXX°	±0.500°	DRAW:
TITLE: HDVMI AF SMT 四脚SMT 带柱			PRODUCTNO: 2000-1-2-41-00-BK	DATE
			SCALE	UNIT
			TYPE	PAGE
			1:1	mm
			Z	1/1