

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC FT DIST 0

REVISIONS



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECO-11-023039	20FEB12	KH	MS

MATERIAL:
 HOUSING: THERMOPLASTIC, UL94V-2, BLACK.
 TERMINAL: BRASS, BRIGHT TIN PLATED.
 SCREWS: 6-32, STEEL, ZINC AND CHROMATE PLATED.

ELECTRICAL:
 MAXIMUM CURRENT: 20A.
 OPERATING VOLTAGE: 600V.
 WIRE RANGE: 12 AWG MAX.

ENVIRONMENT:
 OPERATING TEMP.: -60°C TO +105°C.

1 ALL SCREWS BOTTOMED, TORQUE 2 TO 4 IN-LBS

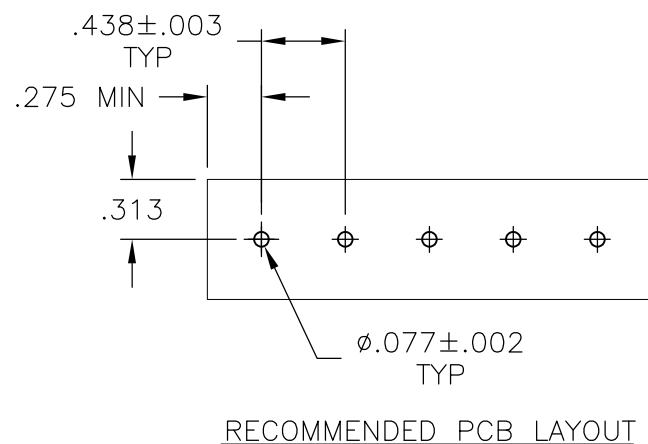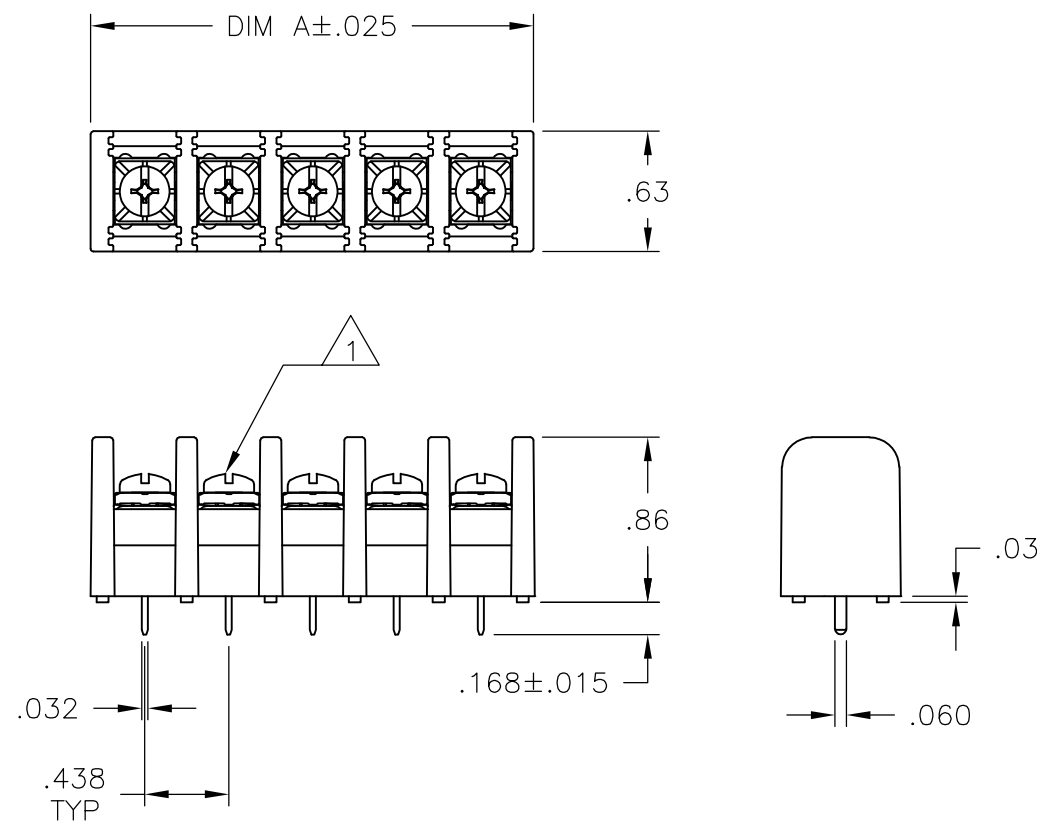

DIM A	NO. OF POS.	CATALOG NUMBER	PART NUMBER
11.937	27	SSB7RP270202	2-1546974-7
11.500	26	SSB7RP260202	2-1546974-6
11.062	25	SSB7RP250202	2-1546974-5
10.625	24	SSB7RP240202	2-1546974-4
10.187	23	SSB7RP230202	2-1546974-3
9.750	22	SSB7RP220202	2-1546974-2
9.312	21	SSB7RP210202	2-1546974-1
8.875	20	SSB7RP200202	2-1546974-0
8.437	19	SSB7RP190202	1-1546974-9
8.000	18	SSB7RP180202	1-1546974-8
7.562	17	SSB7RP170202	1-1546974-7
7.125	16	SSB7RP160202	1-1546974-6
6.687	15	SSB7RP150202	1-1546974-5
6.250	14	SSB7RP140202	1-1546974-4
5.812	13	SSB7RP130202	1-1546974-3
5.375	12	SSB7RP120202	7-1437416-0
4.937	11	SSB7RP110202	1-1546974-1
4.500	10	SSB7RP100202	1-1546974-0
4.062	9	SSB7RP090202	6-1437416-9
3.625	8	SSB7RP080202	6-1437416-8
3.187	7	SSB7RP070202	3-1546561-4
2.750	6	SSB7RP060202	1546974-6
2.312	5	SSB7RP050202	6-1437416-6
1.875	4	SSB7RP040202	1546974-4
1.437	3	SSB7RP030209	2-1546561-3
1.437	3	SSB7RP030202	1546974-3
1.000	2	SSB7RP020209	2-1546561-2
1.000	2	SSB7RP020202	5-1437416-9

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN S SCHL GEL 3/3/04	TE Connectivity NAME SSB7RPXX0202
	0 PLC ± -	CHK S YODER 3/3/04	
	1 PLC ± -	APVD S YODER 3/3/04	
MATERIAL	2 PLC ± .02	PRODUCT SPEC	
	3 PLC ± .010	APPLICATION SPEC	A3 00779 C-5-1437416-9
	4 PLC ± -	WEIGHT -	SCALE NTS SHEET 1 OF 1 REV B
	ANGLES ± 1°	CUSTOMER DRAWING	
	FINISH -		