
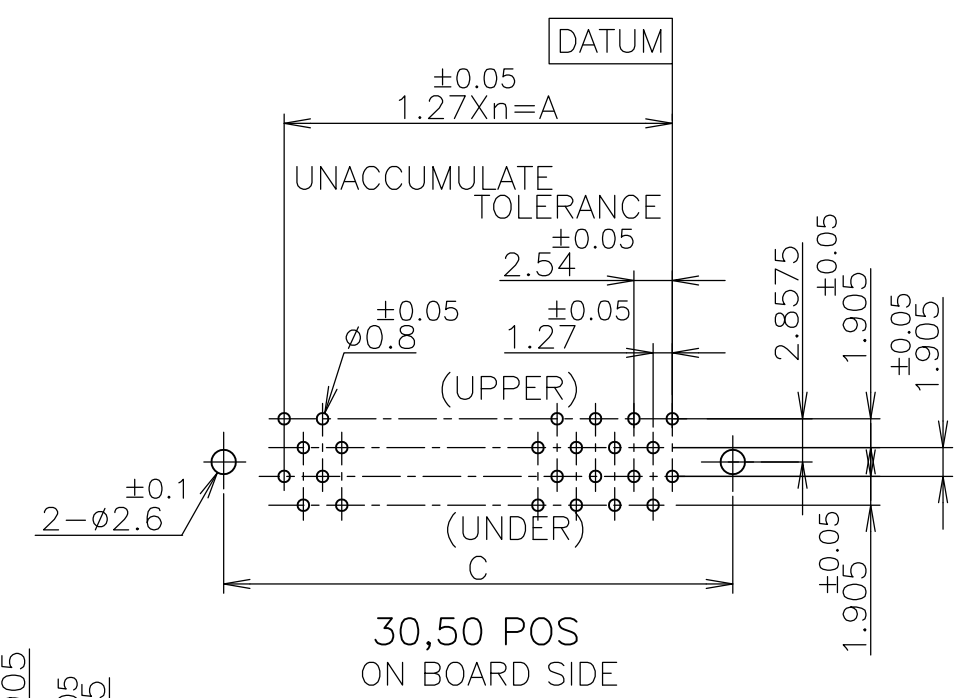
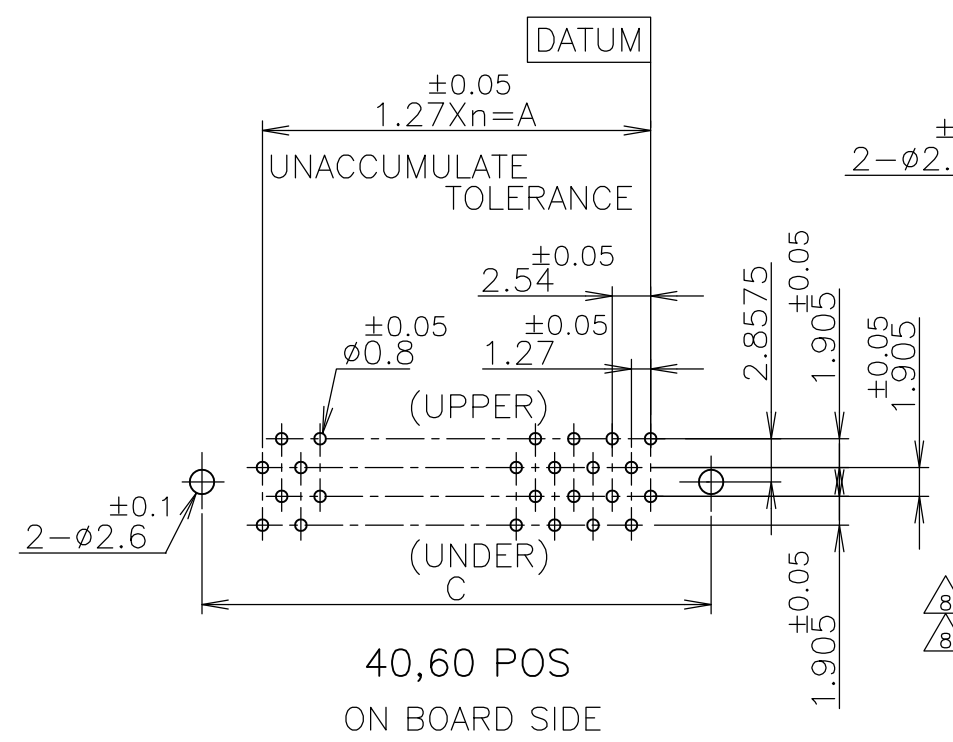
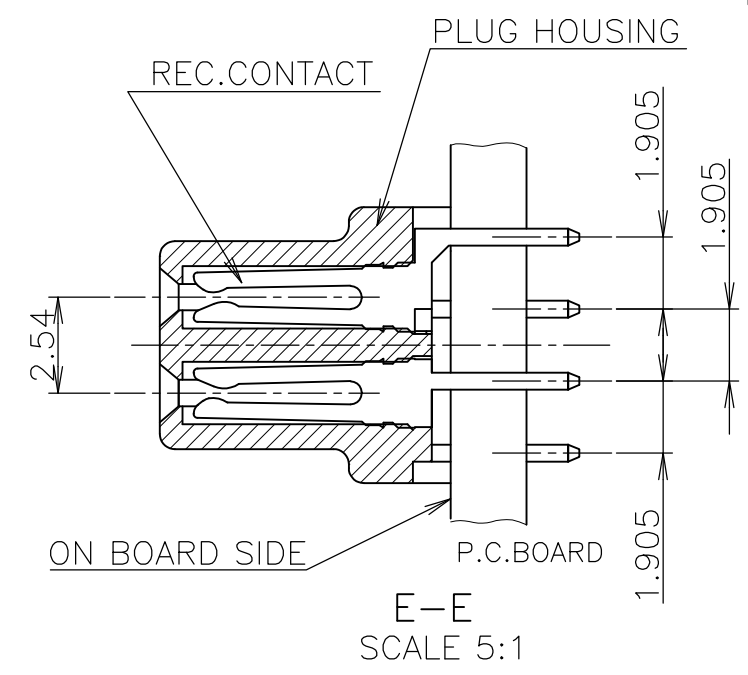


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2004.  
 © COPYRIGHT 2004 By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	/	P	LTR	DESCRIPTION	DATE	DWN	APVD
		P		REVISED PER ECO-11-005033	28MAR11	RK	HMR

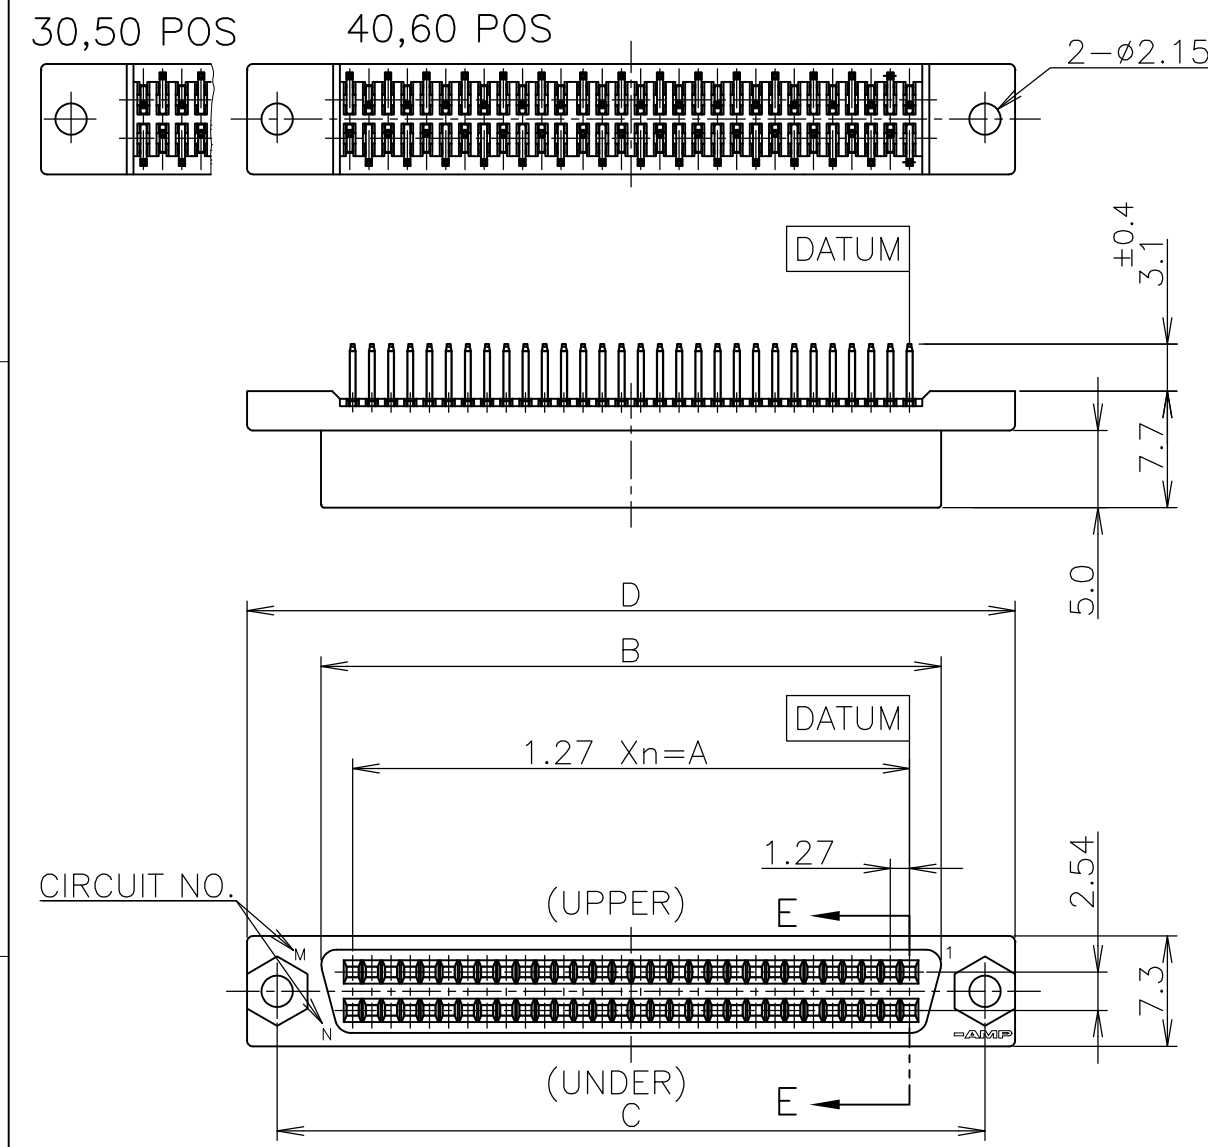

- 1 USE A P.C.B. WHOSE ARE TREATED WITH SOLDER RESIST.
  - 2 SHOW P.C.B LAYOUT FROM ON BOARD SURFACE SIDE.
  - 3 NUMBER THE CONTACT IN THE P.C.B OR CONNECTOR CONSECUTIVELY FROM "DATUM" SIDE.
  - 4 APPLY M2 SCREW & NUT TO FIX OF CONNECTOR.
- ⑤ HOUSING MATERIAL : P.B.T(UL94V-0) / BLACK
  - ⑥ CONTACT MATERIAL : PHO-BRONZE
  - ⑦ FINISH : NICKEL 0.00127 MIN THK. OVERALL SELECTIVE GOLD 0.00076 MIN. OR 0.0002 MIN. THK ON CONTACT AREA AND TIN 0.001 MIN THK. ON TINE AREA.
  - ⑧ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

Au PL. 0.00076 MIN.	6-	-4	60	29	36.83	41.00	46.80	50.80
	6-	-3	50	24	30.48	34.65	40.45	44.45
	6-	-2	40	19	24.13	28.30	34.10	38.10
	6-	-1	30	14	17.78	21.95	27.75	31.75
Au PL. 0.0002 MIN.		-4	60	29	36.83	41.00	46.80	50.80
		-3	50	24	30.48	34.65	40.45	44.45
		-2	40	19	24.13	28.30	34.10	38.10
REMARK	5173279-1		30	14	17.78	21.95	27.75	31.75
	PART NUMBER		POS	n	A	B	C	D

LEAD FREE

GENERAL TOLERANCE  
一般公差

10 $\geq$ :	$\pm 0.2$
30 $\geq$ > 10:	$\pm 0.25$
100 $\geq$ > 30:	$\pm 0.3$
ANGLES:	$\pm 3^\circ$

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	$\pm -$
1 PLC	$\pm -$
2 PLC	$\pm -$
3 PLC	$\pm -$
4 PLC	$\pm -$
ANGLES	$\pm -$
FINISH	$\pm -$

MATERIAL SEE-NOTE

FINISH SEE-NOTE

DWN COREL WANG 23AUG04

CHK STEVEN YAO 20AUG04

APVD I.ENOMOTO 20AUG04

PRODUCT SPEC 108-60036

APPLICATION SPEC

WEIGHT

STE TE Connectivity

NAME PLUG ASSY (VERTICAL/ W/SCREW HOLE)  
AMPLIMITE .050 SERIES I B-TO-B CONN.

SIZE A3 CAGE CODE 00779 DRAWING NO C-5173279 RESTRICTED TO

CUSTOMER DRAWING SCALE 2:1 SHEET 1 OF 1 REV P