

THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.


THESE PRODUCTS MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

"THIS PRODUCT HAS 100% MATTE TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WISKER GROWTH IN ALL INTERCONECT ENVIROMENTS".

FOR POLARIZATION SPECIFY POSITION NUMBER (i.e. BO3 = ROW B POSITION 3) TO OMIT AN OMIT FROM PRODUCT NUMBER IF THIS TEXTURE IS NOT APPLICABLE PRODUCT MANAGER APPROVAL REQUIRED PRIOR TO RELEASE OR SALE OF POLARIZED PRODUCTS.

PLATING OPTIONS:

MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

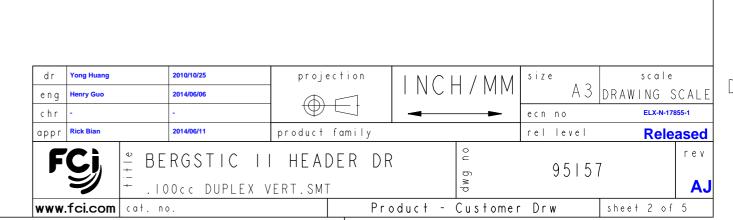

Pro/F File - REV C - 2009-06-09

PDS: Rev :AJ

3

DOUBLE ROW

SCALE: 4/I

RECOMMENDED PAD LAYOUT

STATUS:Released

Printed: Jun 11, 2014

Copyright

 $\mathbb{D}$ 

