


NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
 INSULATOR: P.V.C. AVAILABLE IN BLACK OR RED.
 CONTACT: ANACONDA 7021 OR BOILCAT C97.
 GOLD PLATED.
 SOCKET: BRASS, TIN PLATED.

2. PERFORMANCE:
 MAXIMUM CURRENT: 7.5 AMPS
 MAXIMUM VOLTAGE: 300 V
 MAXIMUM TEMPERATURE: 122°F (50°C)

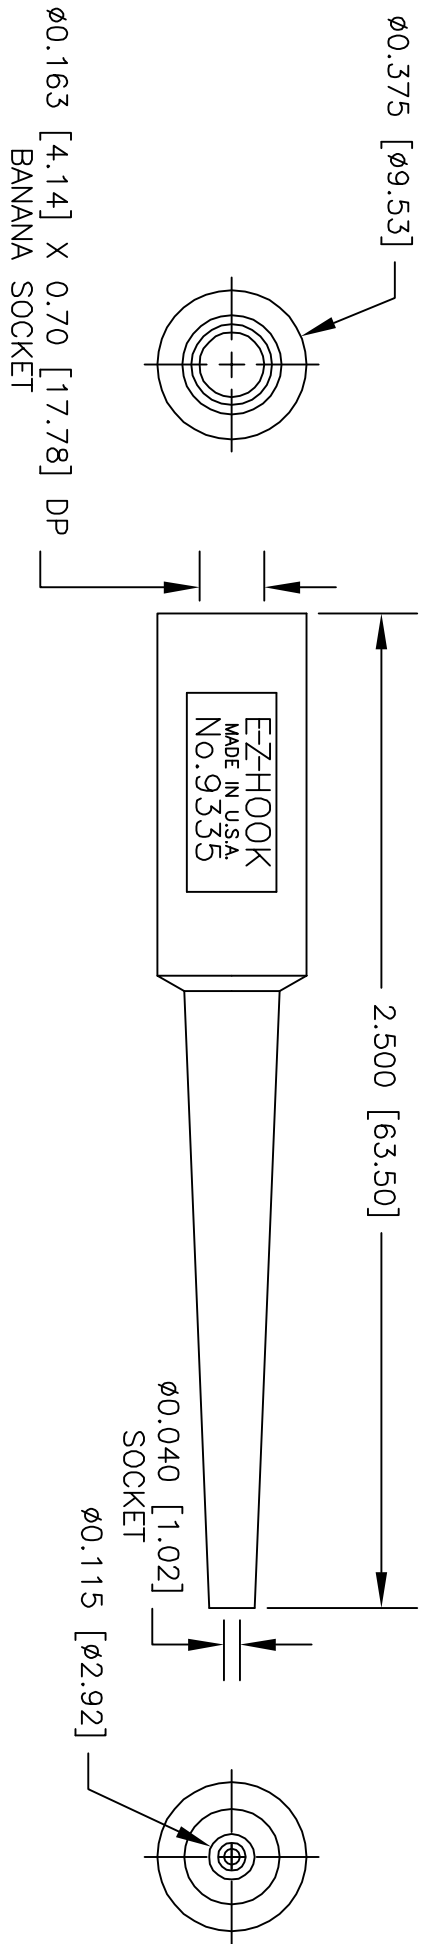

REVISIONS		DATE	APPROVED
LTR			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± .XXX ±

CONTRACT NO.

APPROVALS	DATE
R.L.	3/09

DRAWN

APPROVED BY

MATERIAL

FINISH

USED ON

APPLICATION

DO NOT SCALE DRAWING

DESCRIPTION

EZ-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.

DESCRIPTION
 EZ-FLEX BAN SKT TO 0.040 [1.02] SKT ADAPTER (20AWG)

SIZE CODE IDENT NO. DRAWING NO. REV.

A 08505 9335

SCALE 2:1 SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EZ-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF EZ-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.