
DESCRIPTION: LOW PROFILE FLAT RIBBON CONNECTOR

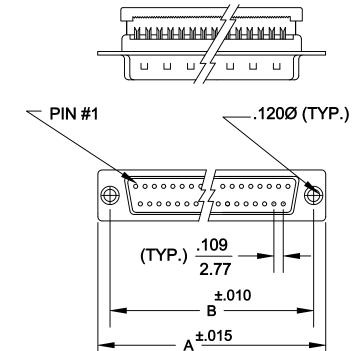

SPECIFICATIONS:

MATERIALS:

SHELL: STEEL, NICKEL PLATED INSULATOR: UL 94V-0 RATED PBT 230 DEGREE PROCESS TEMP.

CONTACTS: BRASS - GOLD PLATED

RoHS COMPLIANT

ELECTRICALS:


CURRENT RATING: 1 AMP


CONTACT RESISTANCE: 15 mOHMS MAX INSULTOR RESISTANCE: 1000 MOHMS MIN

VOLTAGE: 500V AC FOR 1 MINUTE TEMPERATURE: -50°C TO +105°C

			С	С
	Α	В	NO S/R	WITH S/R
9	1.213	.984	.610	.730
	30.81	25.00	15.49	18.54
15	1.541	1.312	.610	.730
	39.14	33.33	15.49	18.54
25	2.088	1.852	.610	.730
	53.04	47.04	15.49	18.54
37	2.729		.610	.730
	69.32	63.50	15.49	18.54

TERMINATED





ACCEPTS: 26 & 28 AWG STRANDED .050" CENTER FLAT RIBBON CABLE


M	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED	DRAWN: WAYNE ROBBINS		DATE: 11-12-05		
	OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	CHECKED:		DATE:		
NIA	SCALE: 1:1	SHEET	0F 1		REV 1	
		DWG NO. 184-XXX-193LXX1				




ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS




03X..... .250" (MATING SIDE) - CN8



02X250" (BOARD SIDE) - CN2



01X065" (BOARD SIDE) - CN1



91X225" (BOARD SIDE) - .197 MATING SIDE - CN10/SFS0440

NOTE: 4-40 FEMALE SCREW LOCK IS REMOVABLE

