

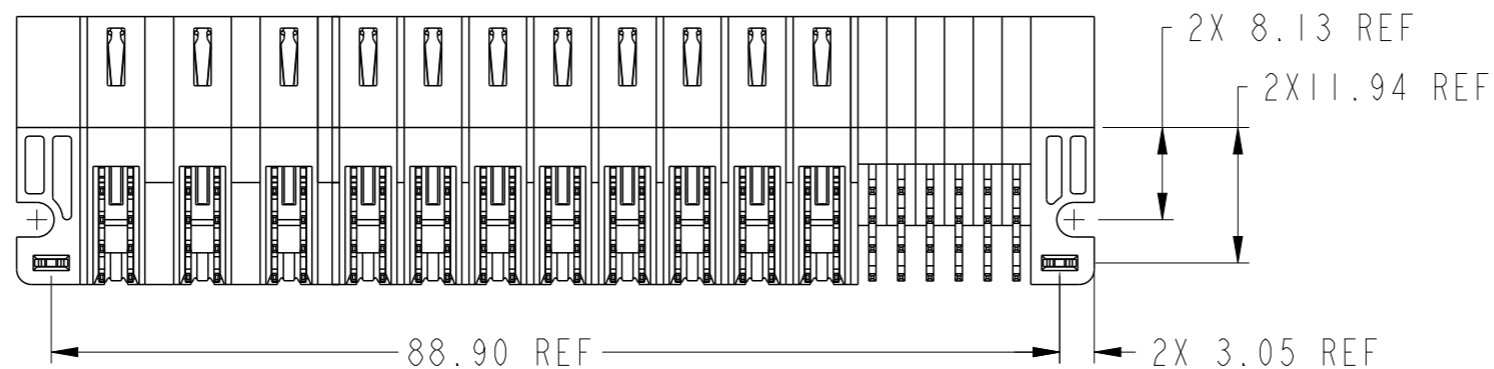
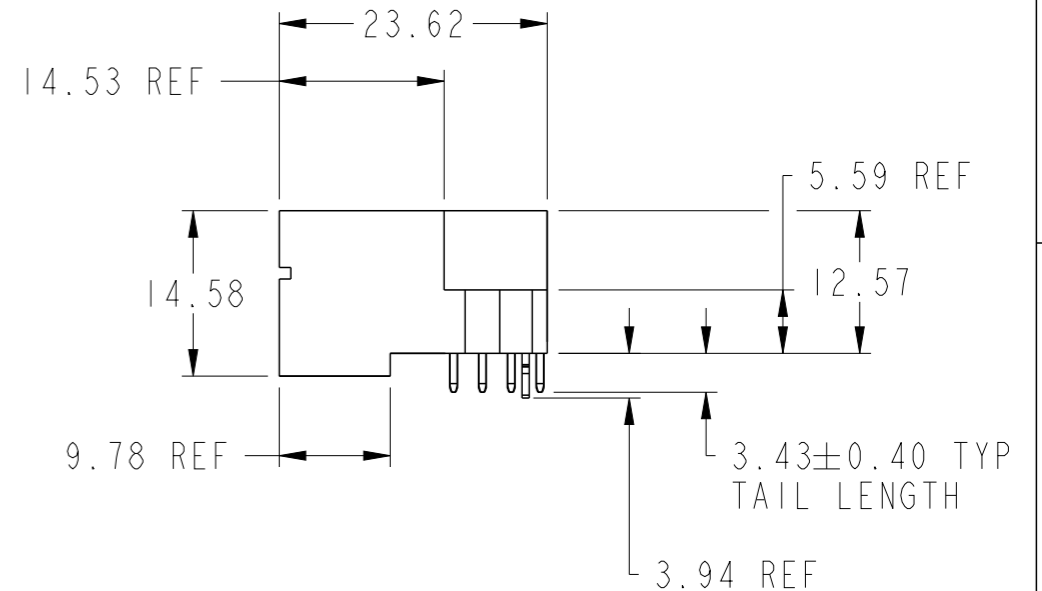
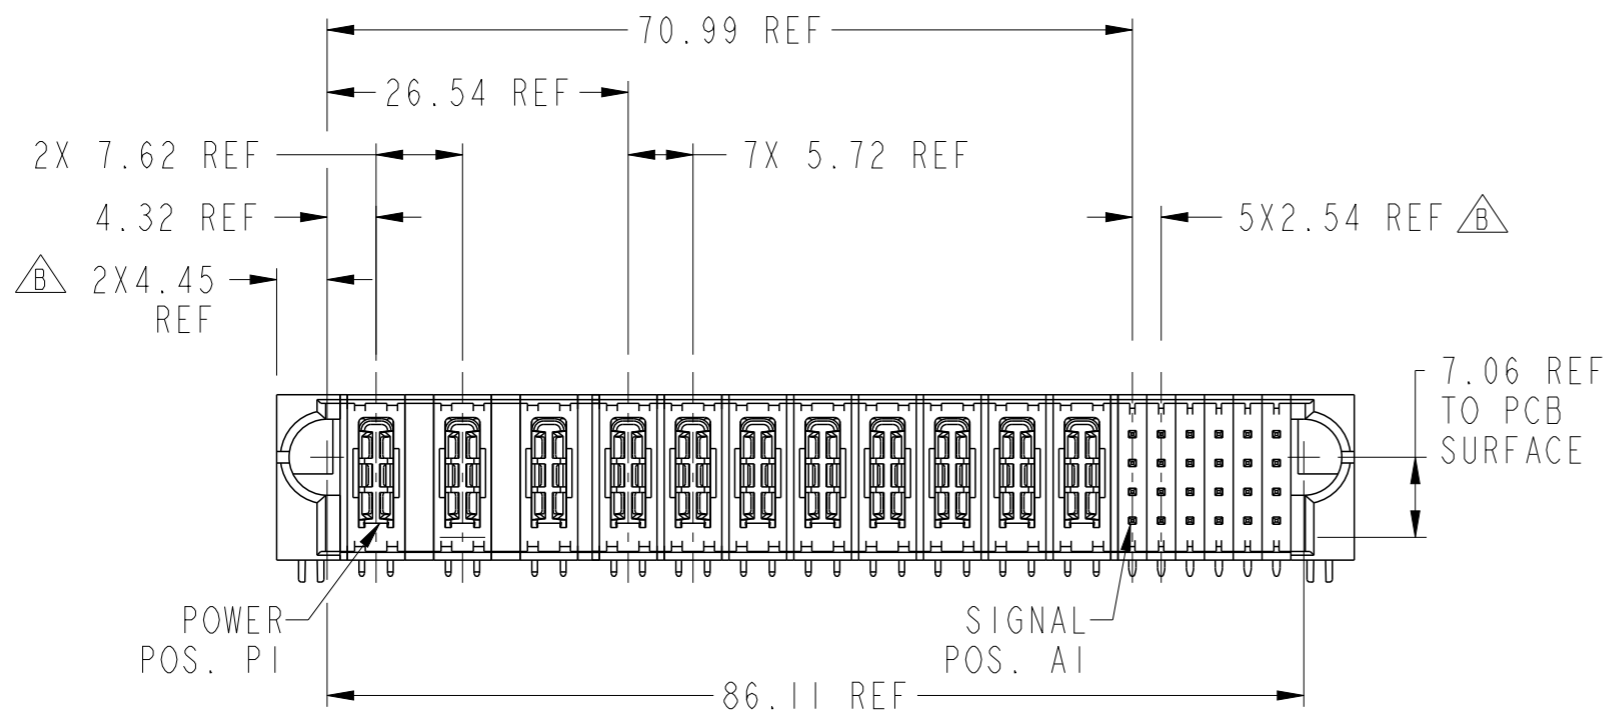


PART NUMBER 10106262-B006001LF

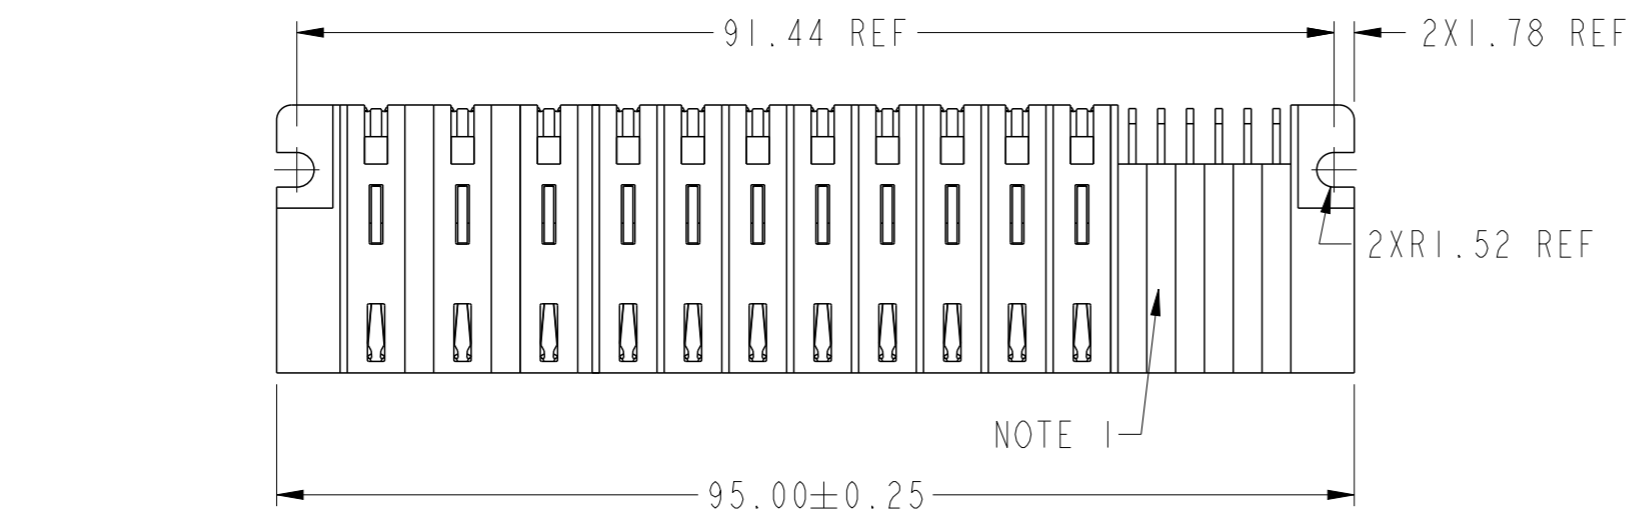

spec ref	-	dr	Peng-Bing Fu	2012/02/26	projection	MM	size	A3	scale	3:2	
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	2012/11/14			ecn no	ELX-DG-013143-1			
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Shao-Qi Kuang	2012/11/15			product family	PwrBlade+	rel level	Released	
surface	<input checked="" type="checkbox"/> linear <input type="checkbox"/> angular	appr	Pei-Ming Zheng	2012/11/15			dwg no	10106262-B006001		rev	B
ASME Y14.5	linear: 0.X ±0.5, 0.XX ±0.25, 0.XXX ±0.10 angular: 0° ±2°	www.fci.com		cat. no.	3ACP + 8HP + 24S RA STB HEADER		Product - Customer Drw		sheet 1 of 3		

PRODUCT NO.	ROWS	HIGH POWER											SIGNAL								
		E1	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	1	2	3	4	5	6	E2	
10106262-B006001LF	DCBA	HA	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	HH	UU	HH	HH	UU	HH	HH	AA
														TT	TT	TT	TT	TT	TT	TT	
														SS	SS	SS	SS	SS	SS	SS	
														RR	RR	RR	RR	RR	RR	RR	

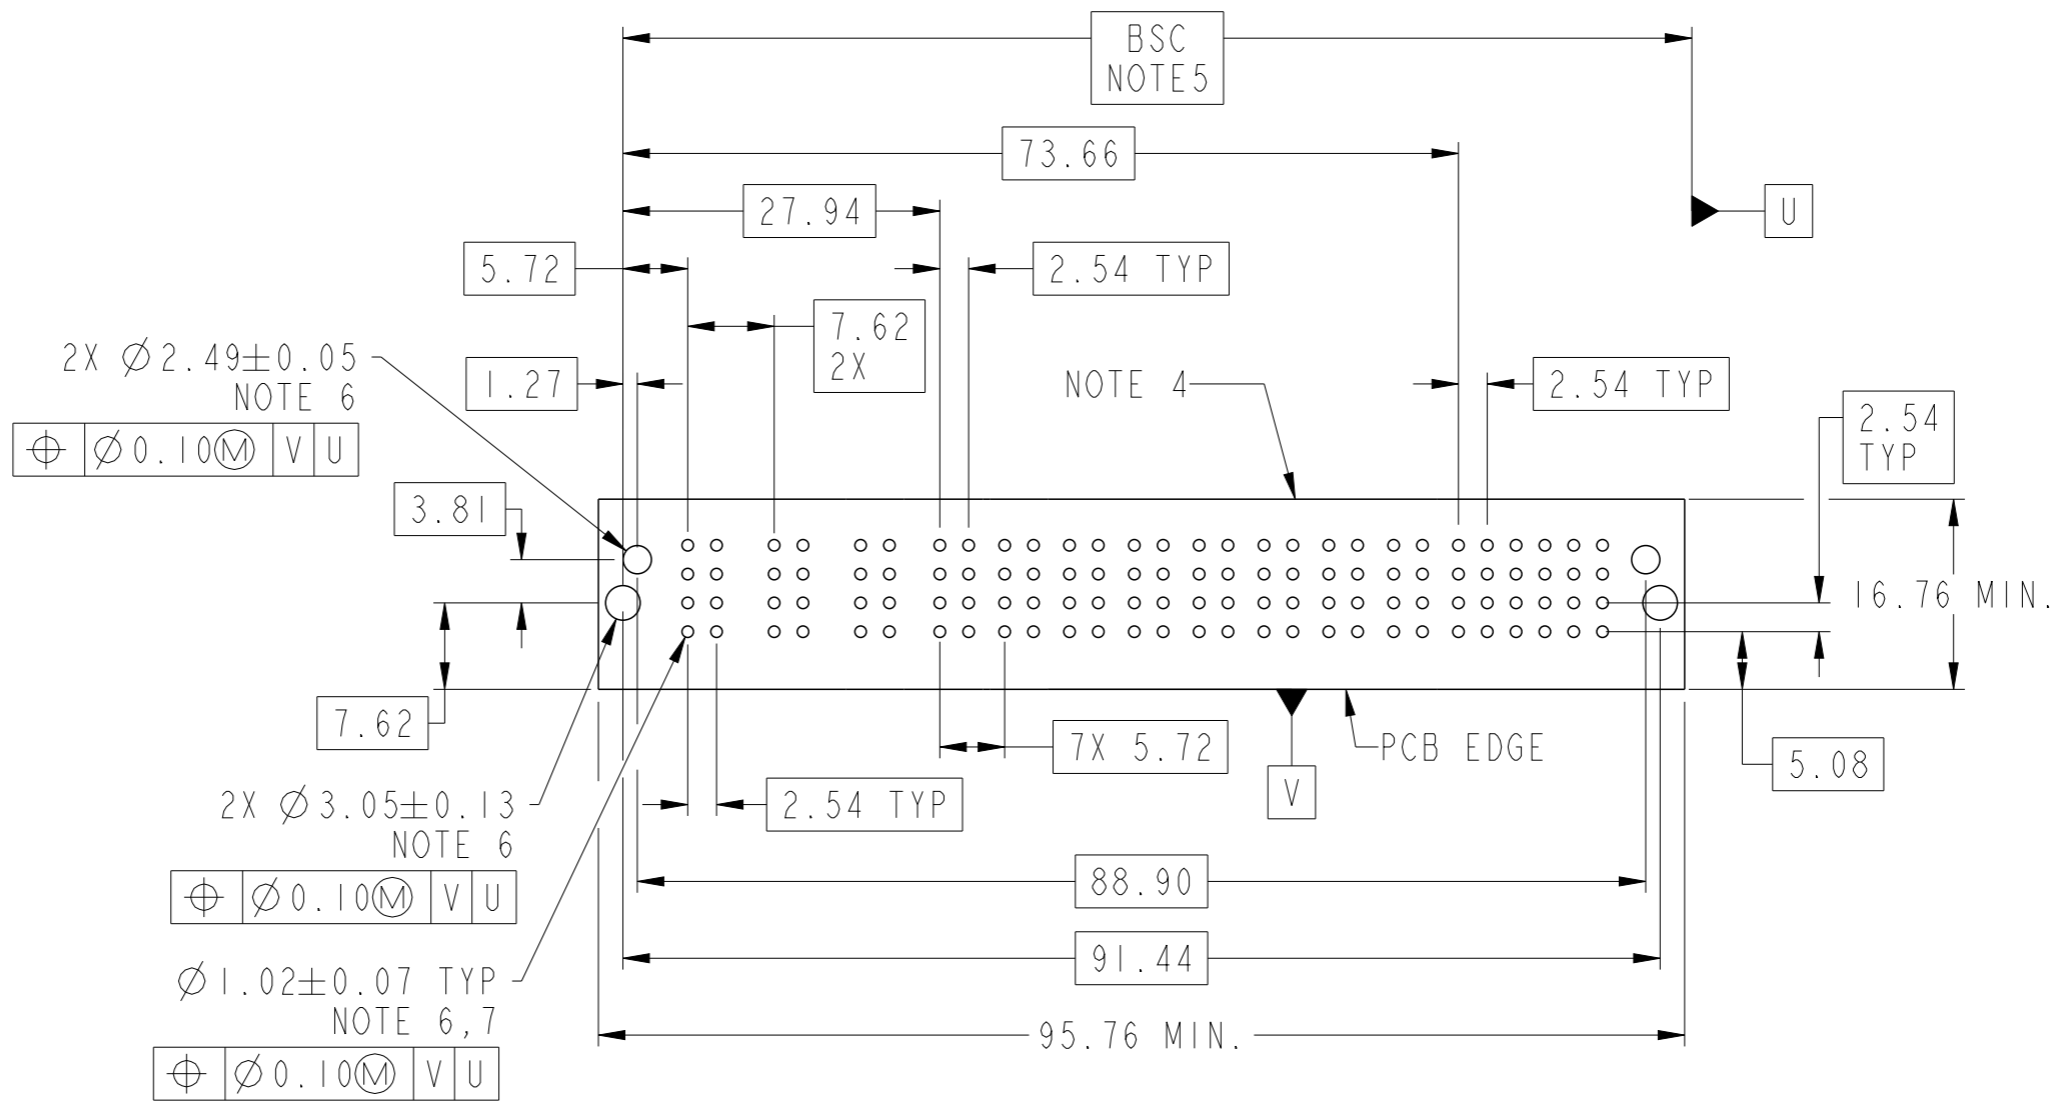

CODE	DESCRIPTION
F	MLBF SIGNAL CONTACT, ROW B (3.43)
G	MLBF SIGNAL CONTACT, ROW C (3.43)
H	MLBF SIGNAL CONTACT, ROW D (3.43)
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

spec ref	-	dr	Peng-Bing Fu	2012/02/26	projection	MM	size	A3	scale	3:2	
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	2012/11/14			ecn no	ELX-DG-013143-1			
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Shao-Qi Kuang	2012/11/15			product family	PwrBlade+	rel level	Released	
surface	linear	appr	Pei-Ming Zheng	2012/11/15			dwg no	10106262-B006001		rev	B
ASME Y14.5	angular			cat. no.	3ACP + 8HP + 24S		Product - Customer Drw		sheet 2 of 3		
			www.fci.com			RA STB HEADER					



Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- $\triangle B$ 9) A $\triangle B$ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION



Copyright FCI.

spec ref -		dr	Peng-Bing Fu	2012/02/26	projection	MM	size	A3	scale	3:2		
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Peng-Bing Fu	2012/11/14			ecn no		ELX-DG-013143-1			
ASME Y14.5		chr	Shao-Qi Kuang	2012/11/15			product family		PwrBlade+		rel level	Released
surface		linear	appr	Pei-Ming Zheng			2012/11/15	3ACP + 8HP + 24S		dwg no	10106262-B006001	
ASME Y14.5	angular	www.fci.com		cat. no.	Product - Customer Drw			sheet 3 of 3				