Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

HRS DRAWING FOR REFERENCE

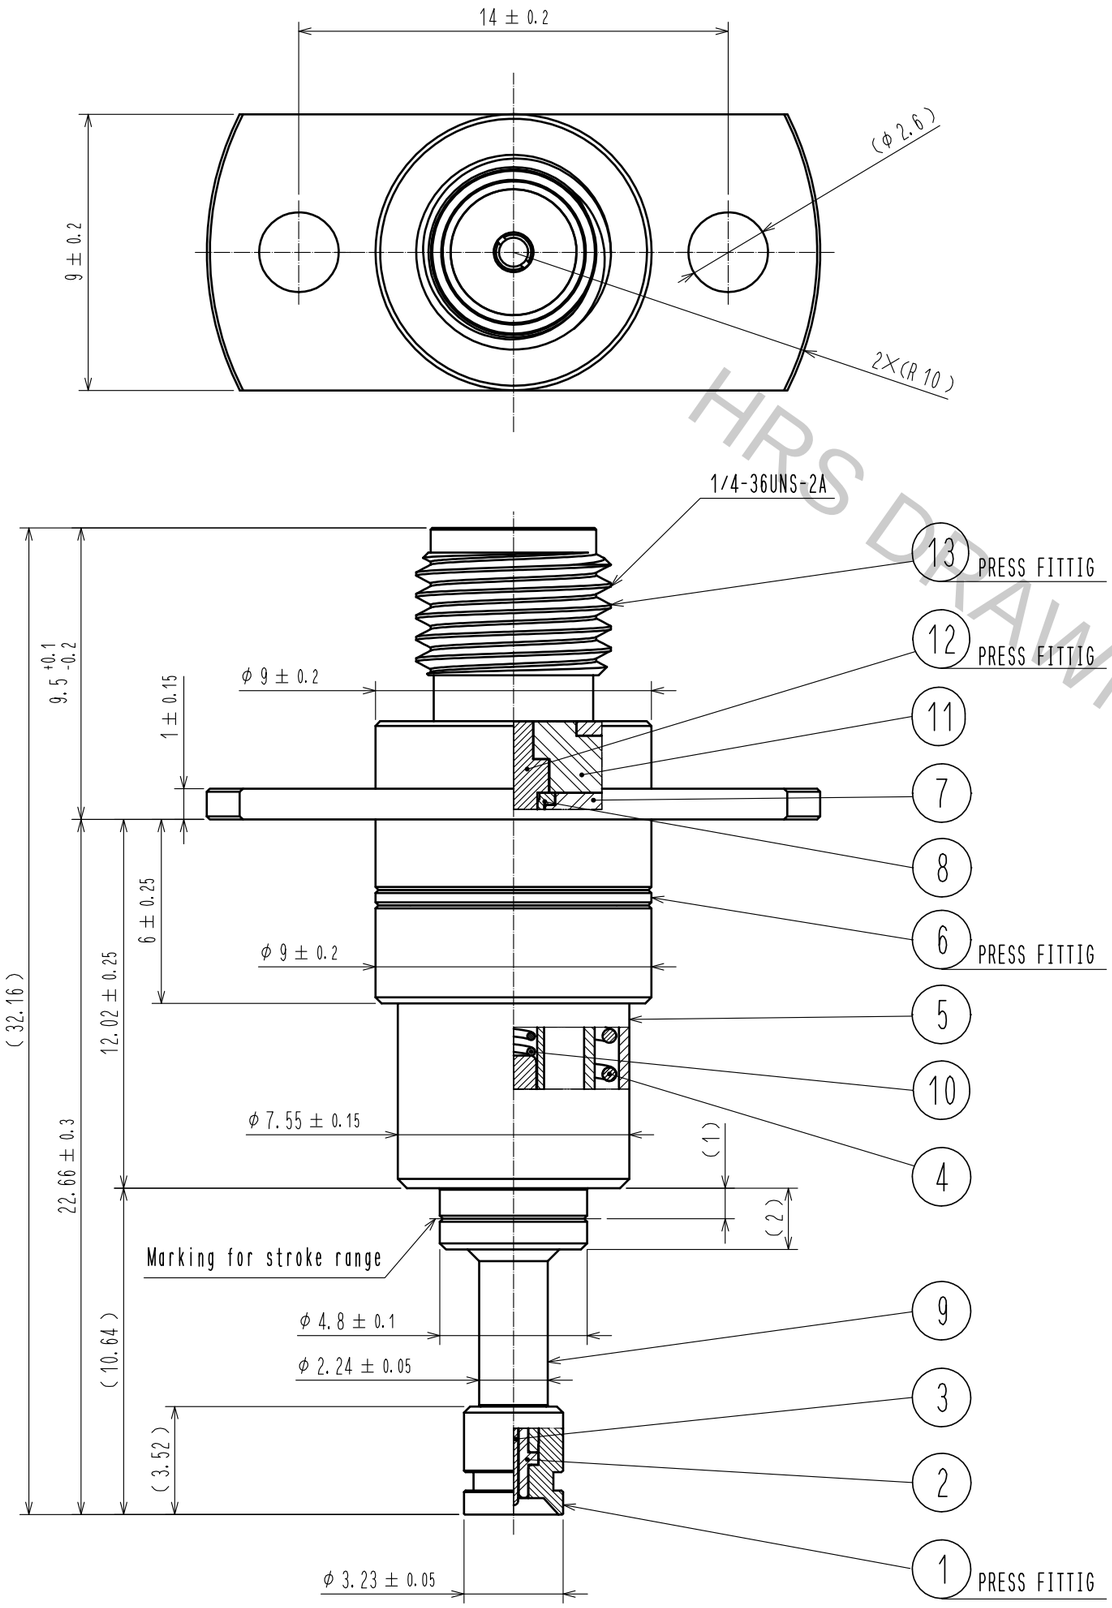

MATED CONDITION(4:1)

1 Recommend stroke range:1mm(Min)~2mm(Max)

〖Stroke range:1mm〗

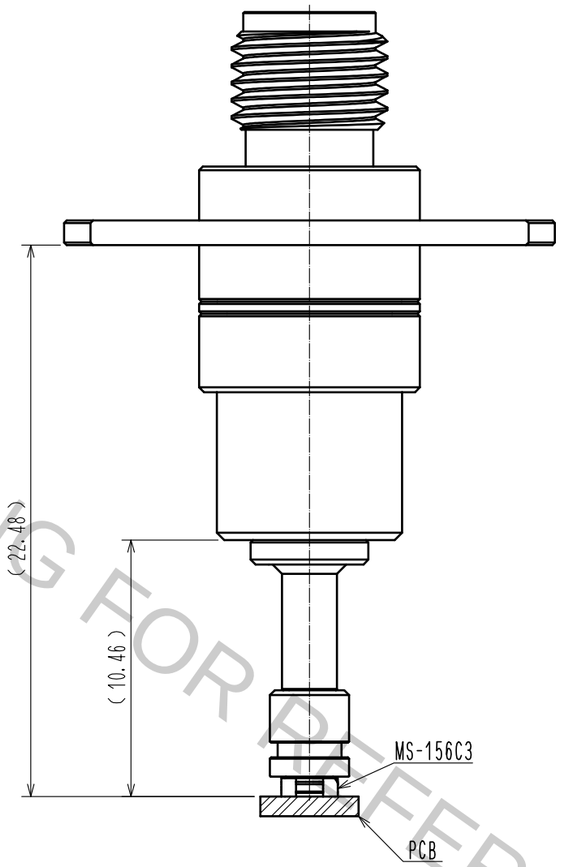

〖Stroke range:2mm〗

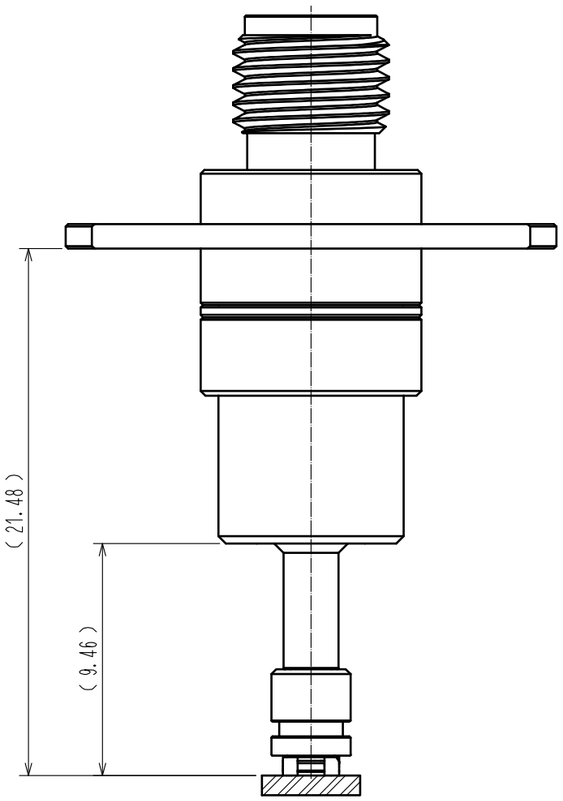

Note. 1 Please mate this product (MS-156-HRMJ-F6) vertically to the receptacle (MS-156C3) within the the recommend stroke range.

RoHS COMPLIANT

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
7	PTFE				
6	BERYLLIUM COPPER	GOLD PLATING	13	STAINLESS STEEL	PASSIVATE
5	PHOSPHOR BRONZE	NICKEL PLATING	12	BERYLLIUM COPPER	GOLD PLATING
4	PIANO WIRE	NICKEL PLATING	11	PTFE	
3	BERYLLIUM COPPER	GOLD PLATING	10	PIANO WIRE	GOLD PLATING
2	PTFE		9	BERYLLIUM COPPER	GOLD PLATING
1	STAINLESS STEEL	GOLD PLATING	8	BERYLLIUM COPPER	GOLD PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	0				

HIROSE ELECTRIC CO., LTD.

APPROVED	KH. IKEDA	16.03.16	DRAWING NO. EDC-360551-00-00
CHECKED	NK. NINOMIYA	16.03.16	PART NO. MS-156-HRMJ-F6
DESIGNED	RO. FURUYAMA	16.03.16	CODE NO. CL358-0352-0-00
DRAWN	RO. FURUYAMA	16.03.16	0 1/1