


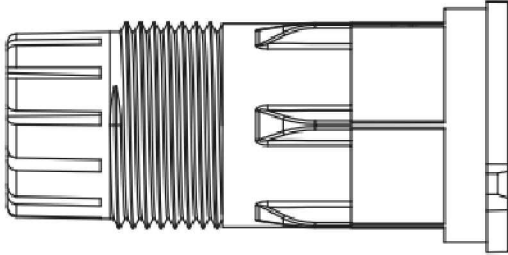

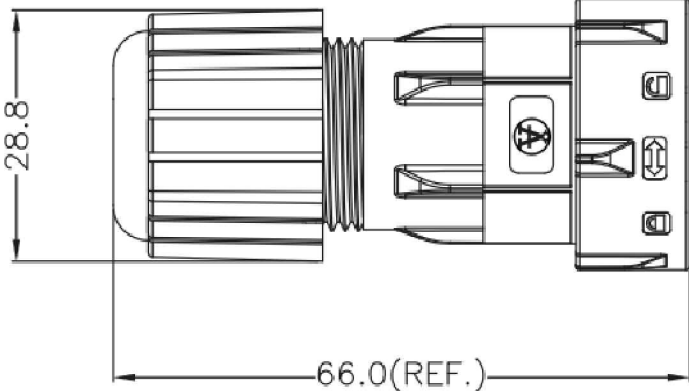
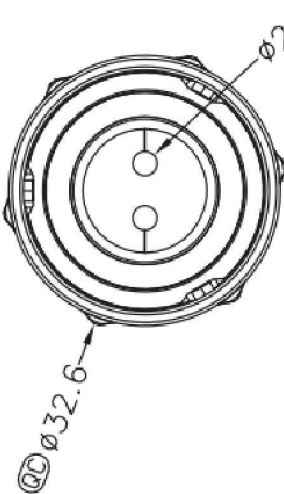


	1	2	3	4	5	6	7			
A								A		
B								B		
C	Seals Nut	Seals	Bayonet Nut	Clamp Ring	Gasket			C		
D					<b>Material:</b> <ul style="list-style-type: none"> <li>• Waterproof Rate: IP67</li> <li>• Cable OD: Ø2.5~Ø2.8MM Max.</li> <li>• Clamp Ring: PPO, UL94V-0, Black</li> <li>• Bayonet Nut: PPO, UL94V-0, Black</li> <li>• Sealing Nut: Nylon+GF, UL94-V, Black</li> <li>• Seals: Silicone, UL94V, Gray</li> <li>• Gasket: Silicone, UL94V-0, Gray</li> </ul>			D		
E								E		
F								F		
G	<b>RoHS compliant</b> Unit:mm		Scale	1:1			Date	Name	Customer-No.	
			TOLERANCE				Drawn	08. 01. 2014	Joanna	
			X.				Approved	08. 01. 2014	Joanna	ASSMANN WSW-No.
			X. X							A-FB-00BLMA-LL1
			X. XX							Drawing-No.
H			DIM	TOL						ASS 7038 CA
			X. °							rev00
			Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet
	1	2	3	4	5	6	7			