
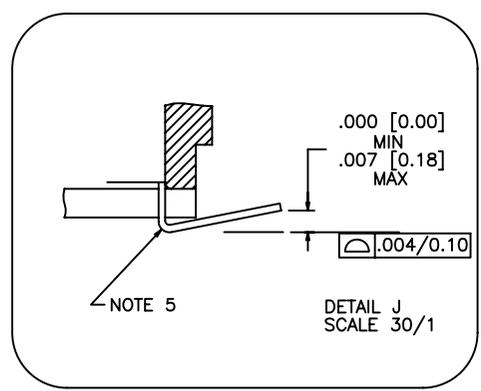
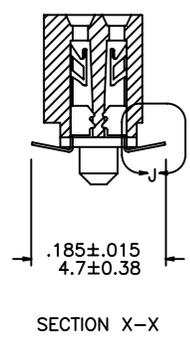
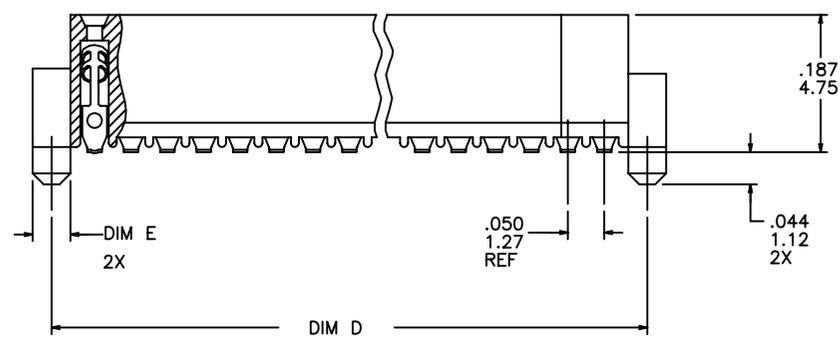
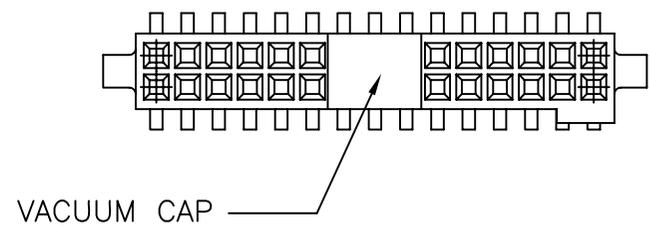


PRODUCT NUMBER  
SEE TABLE

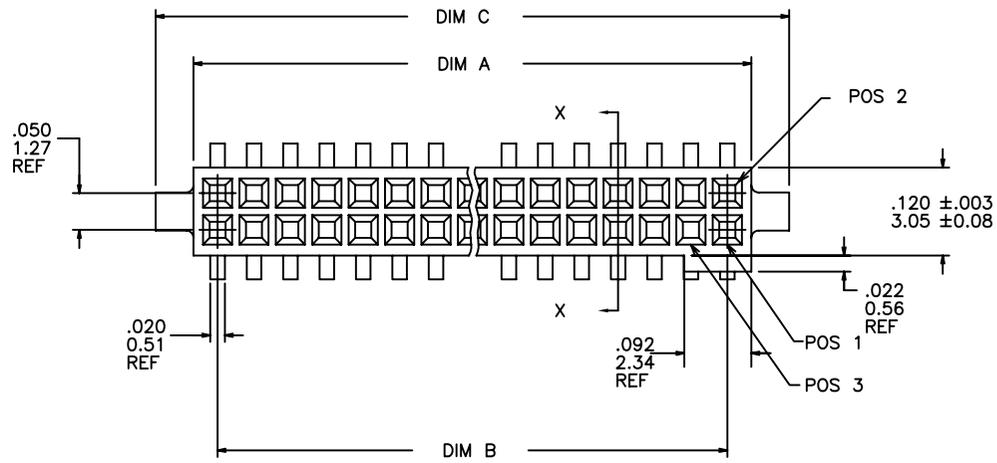



mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302		ISO 406 ISO 1101		INCH/MM		RIB CAGE	
ltr	ecn	nldr	date	tolerances unless otherwise specified		INCH/MM		title	
AH	ELX-N-19819	JH	12/22/14	angles	linear	scale 1:1		.050cc VERT. SMT. W/LOC. & POL. FEATURE	
				$\sigma \pm z$					
AD	M09-0058	CMR	4/06/09	dr	M. CLOUSER	6/26/91		dwg no	
AE	M09-0071	MHT	4/30/09	enr	B. BARUFFALO	6/26/91		sheet 1 of 3	
AF	N10-0174	YOH	6/17/10	chr	B. BARUFFALO	6/26/91		size	
AG	ELX-N-010202	YO	2/8/12	app	B. BARUFFALO	6/26/91		A3	
sheet	revision	AH	AH	AH					
index	sheet	1	2	3					

FCJ  
 FCJconnect.com  
 Copyright FCJ


REFERENCE ONLY

TAPE WIDTH'S 32mm AND ABOVE HAS BOTH FEED TRACKS, BELOW 32mm HAS TOP FEED TRACK ONLY.

UNREELING DIRECTION

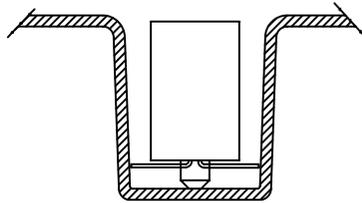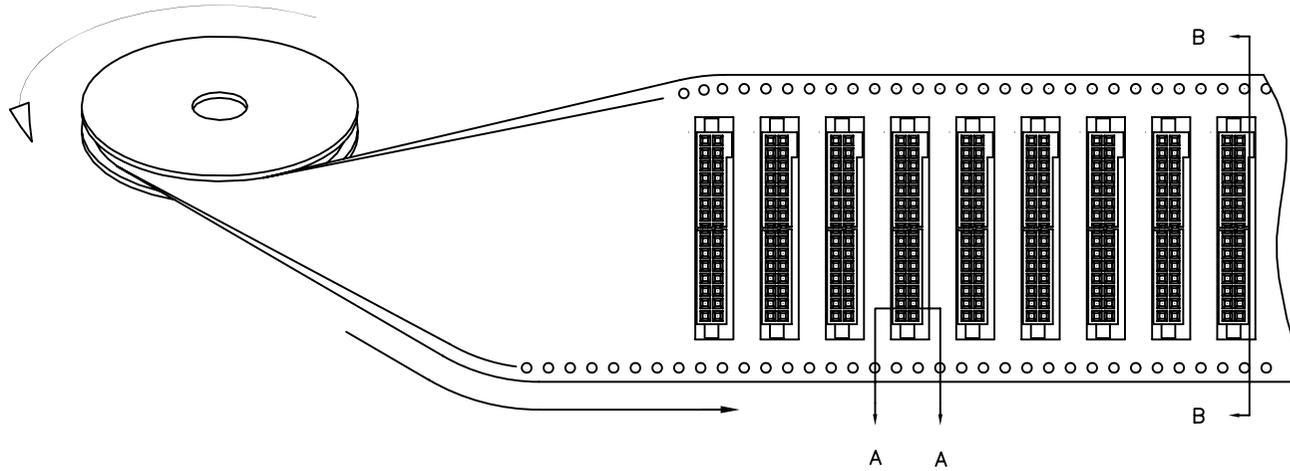

SECTION A-A

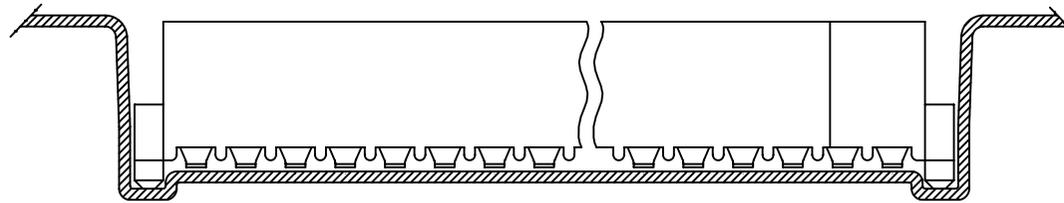

SECTION B-B



FCJconnect.com

Copyright FCI

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406		INCH/MM		RIB CAGE	
ISO 1101		tolerances unless otherwise specified		linear		scale 1:1		title	
XX±.01/XX±0.3		angles		XXX±.005/XXX±0.13				.050cc VERT. SMT.	
σ±z		σ±z		XXXX±.0020/XXX±0.051				W/LOC. & POL. FEATURE	
dr		M. CLOUSER		6/26/91		FCJ		dwg no	
enr		B. BARUFFALO		6/26/91				sheet 3 of 3	
chr		B. BARUFFALO		6/26/91				size	
app		B. BARUFFALO		6/26/91				A3	
sheet index		revision sheet						type Product Customer Drawing	
								87024	

PRODUCT NO. NOTE 9	SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	SPECIAL PACKAGING	TAPE WIDTH PITCH	PIECES PER REEL
87024-605	2 X 5	.266/6.756	.200/5.08	.370/9.398	.3200/8.128	ø.0520/1.321	NOTE 6	24mm 12mm	750
-610	2 X 10	.516/13.106	.450/11.43	.620/15.748	.5700/14.478	ø.0520/1.321	NOTE 6	24mm 12mm	750
-610P	2 X 10	.516/13.106	.450/11.43	.620/15.748	.5700/14.478	ø.0520/1.321	NOTE 8	24mm 16mm	400
-615	2 X 15	.766/19.456	.700/17.78	.870/22.098	.8200/20.828	ø.0520/1.321	NOTE 6	44mm 12mm	500
-620	2 X 20	1.016/25.806	.950/24.13	1.120/28.448	1.0700/27.178	ø.0520/1.321	NOTE 6 & 7	44mm 12mm	500
-625	2 X 25	1.266/32.156	1.200/30.48	1.370/34.798	1.3200/33.528	ø.0520/1.321	NOTE 6	56mm 12mm	500
-630	2 X 30	1.516/38.506	1.450/36.83	1.620/41.148	1.5700/39.878	ø.0520/1.321	NOTE 6 & 7	56mm 12mm	500
-635	2 X 35	1.766/44.856	1.700/43.18	1.870/47.498	1.8200/46.228	ø.0520/1.321	NOTE 6	72mm 12mm	500
-640	2 X 40	2.016/51.206	1.950/49.53	2.120/53.848	2.0700/52.578	ø.0520/1.321	NOTE 6 & 7	72mm 12mm	500
-645	2 X 45	2.266/57.556	2.200/55.88	2.370/60.198	2.3200/58.928	ø.0520/1.321	NOTE 6	72mm 12mm	500
-650	2 X 50	2.516/63.906	2.450/62.23	2.620/66.548	2.5700/65.278	ø.0520/1.321	NOTE 6 & 7	88mm 12mm	500
-625S	2 X 25	1.266/32.156	1.200/30.48	1.370/34.798	1.3200/33.528	ø.0394/1.00	NOTE 6	56mm 12mm	500

NOTES:

- HOUSING MATERIAL:  
LCP GLASS FILLED FLAME RETARDANT PER UL 94V-0  
COLOR: NATURAL
- TERMINAL MATERIAL: BeCu
- TERMINAL PLATING:  
30u"/.76um MIN HARD GOLD OR GXT OVER Ni ON CONTACT ZONES,  
100u"/2.54um MIN TIN OVER Ni IN SOLDERING ZONES,  
OTHERWISE GOLD FLASH OR UNPLATED.
- APPLICATION INFORMATION:  
A. RECOMMENDED MOUNTING PAD PATTERN IS  
SHOWN IN FIGURE "A".  
B. MATING PINS TO BE .0176/0.447 TO .0181/0.459 DIA.  
C. MATING PIN TIPS TO BE IN TRUE POSITION TO MATING  
GRID WITHIN .006/0.15 DIA.  
D. SUGGESTED MATING PIN LENGTH .130/3.30  
±.010/0.25.
- LEAD TIPS TO BE ABOVE HEEL, UP TO .007/0.18 MAX.  
COPLANARITY TO BE MEASURED AT LOWEST POINT (HEEL).
- IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER  
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE  
FOR 20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW  
OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
- PRODUCT SPEC PER BUS-12-087.
- PN DEFINE:

87024-605XXXLF

LEAD FREE

WITH "TR": TAPE AND REEL+CAP  
WITHOUT "CT": TUPE+CAP

WITH "P": THE CARRIER'S PITCH IS 16MM  
WITHOUT "P": THE CARRIER'S PITCH IS 12MM

WITH "S": THE POST'S DIAMETER IS 1.00MM, FOR FIGURE B  
WITHOUT "S": THE POST'S DIAMETER IS 1.321MM, FOR FIGURE A

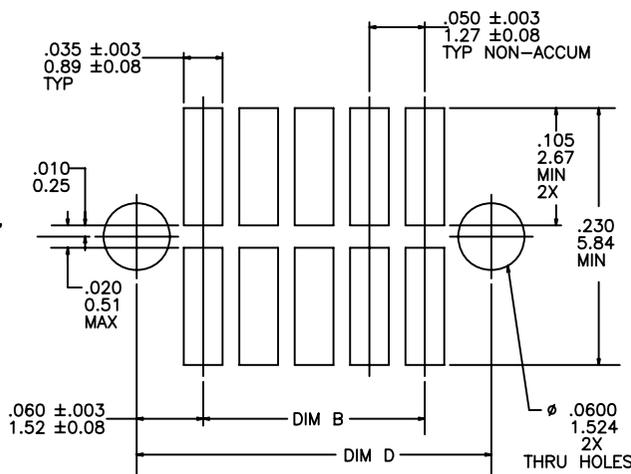


FIGURE A  
RECOMMENDED  
P.C.B. LAYOUT

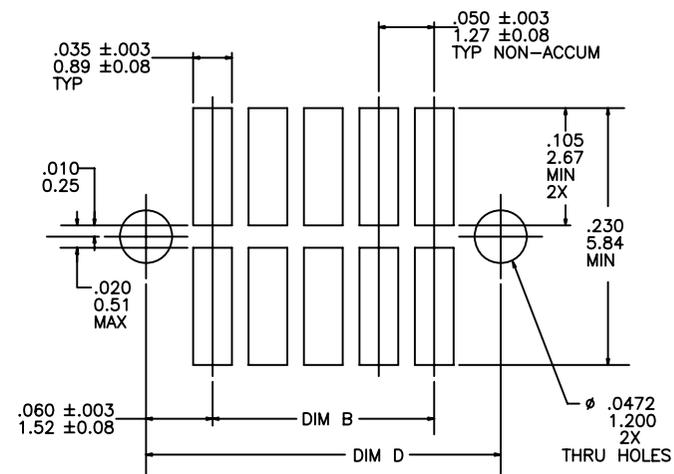


FIGURE B  
RECOMMENDED  
P.C.B. LAYOUT

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302		ISO 406		INCH/MM		RIB CAGE	
tr		ecn		no		dr		date	
AH									
		angles		linear		scale 1:1		title	
								.050cc VERT. SMT. W/LOC. & POL. FEATURE	
		σ±z		XXX±.005/XXX±0.13				dwg no	
				XXXX±.0020/XXX±0.051				sheet 2 of 3	
		dr		M. CLOUSER		6/26/91		size	
		enr		B. BARUFFALO		6/26/91		87024	
		chr		B. BARUFFALO		6/26/91		A3	
		app		B. BARUFFALO		6/26/91		type	
								Product Customer Drawing	
sheet		revision							
index		sheet							