


Series 43000 .4375" (11.11mm) Center-to-Center Spacing

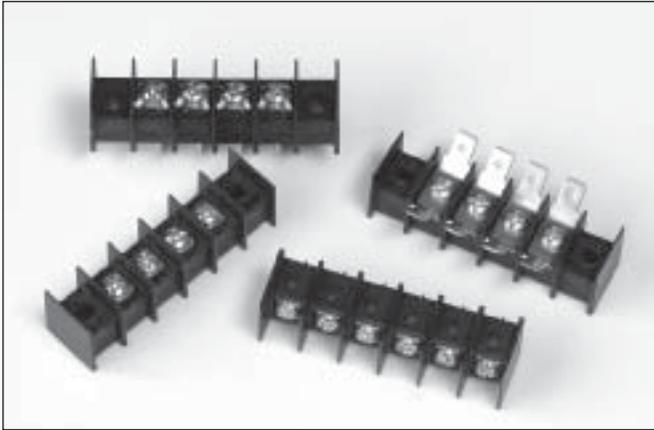

Features:

- Cost-competitive line of .4375" (11.11mm) centerline terminal blocks provides design engineers with multitude of selection choices: base mount and feed thru styles with P.C. pin, turret, quick connect, wire wrap and right angle.
- Available in up to 28 positions.
- Rated up to 30A, 600V
- Accepts very broad wire range from 22AWG to 12 AWG. Variety to top terminations including 6-32 and 8-32 screws, quick connects, wire clamps, jumpers, and covers.
- Unique Curtis contact design helps eliminate fracturing of solder joint due to pin twist.
- Plated brass inserts are standard on all Series 43000 terminal blocks. Standoffs molded into the blocks inhibit the trapping of solder flux – makes it easier to clean boards.
- All terminal blocks for electronic use are made from highly durable, self-extinguishing polypropylene material rated 94 V-0 by Underwriters Laboratories, Inc.
- Custom built terminal blocks for special applications are available. Contact any authorized Curtis distributor or representative, or call the factory direct.


Single Row

 Recognized under the Components Program of Underwriters Laboratories, Inc. Standard 1059, Guide No. XCFR2, File No. E62557.


 Guide No. 22.2 No. 158, Report No. LR39186-1.

Series 43000 Variations


0 – Flush Mount




1 – Printed Circuit Pin

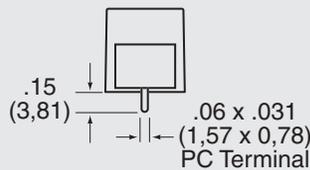


2 – Turret Type Solder Terminal

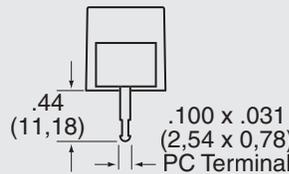


3 – Quick Connect .110"

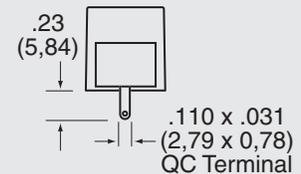


4 – Quick Connect .187"

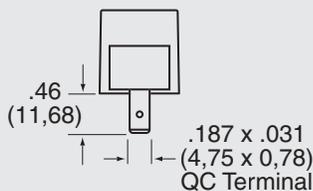


5 – Quick Connect .250"

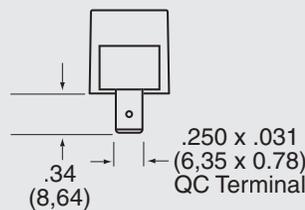


6 – Wire Wrap Pin

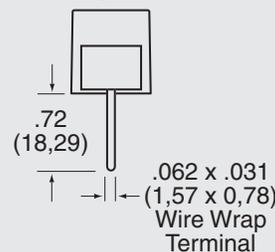


7 – Right Angle Printed Circuit Pin

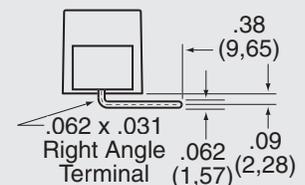


1 – Printed Circuit Pin

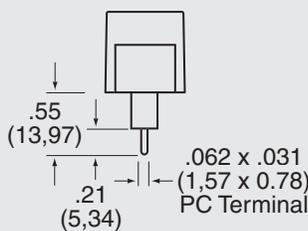


2 – Turret Type Solder Terminal

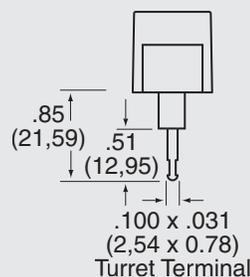

3 – Quick Connect .110"

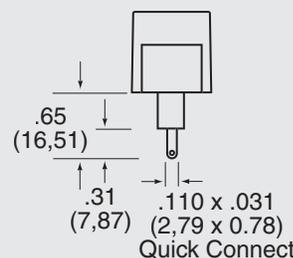

6 – Wire Wrap Pin (extended pc pin)

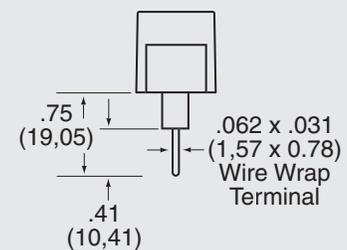

BARRIER STYLE

Specifications:

Center-to-Center Spacing: .4375" (11.11mm)

Wire Range: No. 22AWG to 12AWG

No. of Terminals: 1 thru 26 (28 without mounting holes)

Voltage Rating: 600V

Tightening Torque: 9 in. lb.

Current Rating: 20 amps UL
(30 Amps with 10AWG & Lugs)

Housing:


Material Polypropylene
 Continuous Use Temp. (UL Index) 105°C (221°F)
 Flammability Rating 94V-0
 Water Absorption (24 hrs. % wt. gain) .03%

Breakdown Voltage:

Terminal - Terminal 3000V
 Terminal - Ground 3000V

Terminals: Brass - Tin Plated


Series 43000 Surface Mount With Mounting Ends

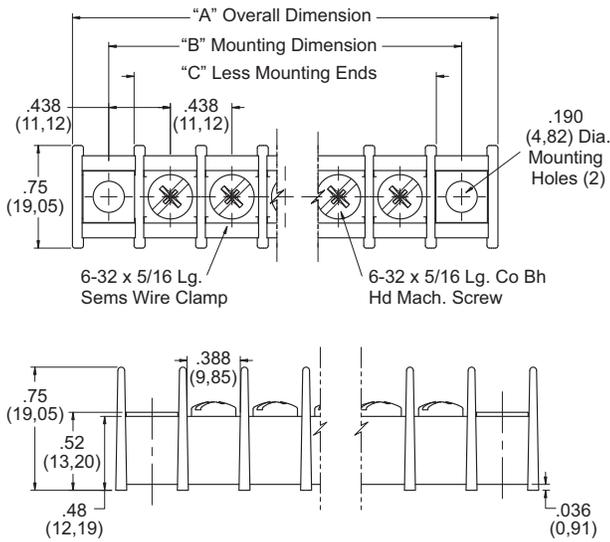

| Number of Terminals | Series 43000 With Mounting Ends | | | | Without Mounting Ends | |
|---------------------|------------------------------------|-------------|-------------------------------------|-------------|----------------------------------|-------------|
| | Dimensions | | | | | |
| | A ± .031 Overall Dimensions (O.D.) | | B ± .031 Mounting Dimensions (M.D.) | | C ± .031 Less Mounting Positions | |
| | Inches | Metric (mm) | Inches | Metric (mm) | Inches | Metric (mm) |
| 1 | 1.375 | 34.93 | .875 | 22.23 | .500 | 12.70 |
| 2 | 1.813 | 46.05 | 1.313 | 33.35 | .938 | 23.83 |
| 3 | 2.250 | 57.15 | 1.750 | 44.45 | 1.375 | 34.93 |
| 4 | 2.688 | 68.28 | 2.188 | 55.58 | 1.813 | 46.05 |
| 5 | 3.125 | 79.38 | 2.625 | 66.68 | 2.250 | 57.15 |
| 6 | 3.563 | 90.50 | 3.063 | 77.80 | 2.688 | 68.28 |
| 7 | 4.000 | 101.60 | 3.500 | 88.90 | 3.125 | 79.38 |
| 8 | 4.438 | 112.73 | 3.938 | 100.03 | 3.563 | 90.50 |
| 9 | 4.875 | 123.83 | 4.375 | 111.13 | 4.000 | 101.60 |
| 10 | 5.313 | 134.95 | 4.813 | 122.25 | 4.438 | 112.73 |
| 11 | 5.750 | 146.05 | 5.250 | 133.35 | 4.875 | 123.83 |
| 12 | 6.188 | 157.18 | 5.688 | 144.48 | 5.313 | 134.95 |
| 13 | 6.625 | 168.28 | 6.125 | 155.58 | 5.750 | 146.05 |
| 14 | 7.063 | 179.40 | 6.563 | 166.70 | 6.188 | 157.18 |
| 15 | 7.500 | 190.50 | 7.000 | 177.80 | 6.625 | 168.28 |
| 16 | 7.938 | 201.63 | 7.438 | 188.93 | 7.063 | 179.40 |
| 17 | 8.375 | 212.73 | 7.875 | 200.03 | 7.500 | 190.50 |
| 18 | 8.813 | 223.85 | 8.313 | 211.15 | 7.938 | 201.63 |
| 19 | 9.250 | 235.00 | 8.750 | 222.25 | 8.375 | 212.73 |
| 20 | 9.688 | 246.08 | 9.188 | 233.38 | 8.813 | 223.85 |
| 21 | 10.125 | 257.18 | 9.625 | 244.48 | 9.250 | 234.95 |
| 22 | 10.563 | 268.30 | 10.063 | 255.60 | 9.688 | 246.08 |
| 23 | 11.000 | 279.4 | 10.500 | 266.70 | 10.125 | 257.18 |
| 24 | 11.438 | 290.53 | 10.938 | 277.83 | 10.563 | 268.30 |
| 25 | 11.875 | 301.63 | 11.375 | 288.93 | 11.000 | 279.40 |
| 26 | 12.313 | 312.75 | 11.813 | 300.05 | 11.438 | 290.53 |
| 27 | | | | | 11.875 | 301.63 |
| 28 | | | | | 12.313 | 312.75 |

Dimensions shown are ± 0.030"

43000 Feed-Thru Series

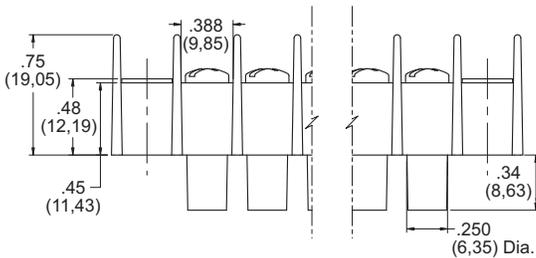

Dimensions are in inches and millimeters unless otherwise specified. Values in parentheses are metric equivalents.

Series 43000

How to Order

43 X X X X XX X

MOLDING DESIGN]

- 0 = Surface Mount w/ Mounting Ends
- 1 = Surface Mount w/o Mounting Ends
- 2 = Insulated Feed Thru w/ Mounting Ends
- 3 = Insulated Feed Thru w/o Mounting Ends

INSERT OR BOTTOM TERMINATION DESIGN]

- 0 = Surface Mount, No Bottom Termination
- 1 = Printed Circuit Pin
- 2 = Turret Type Solder Terminal
- 3 = Quick Connect .110"
- 4 = Quick Connect .187"
- 5 = Quick Connect .250"
- 6 = Extended Printed Circuit Pin or Wire Wrap
- 7 = Right Angle Printed Circuit Pin

Note: Option 4 & 5 Only Available on Surface Mount Style Molding

INSERT/SCREW DIMENSION]

- 0 = 6-32 Insert and Screw
- 1 = 8-32 Insert and Screw, available on PC Pin, Turret Type Solder Pins, Wire Wrap and Right Angle Versions only

[SPECIALS OR OPTIONAL DESIGNS

- 0 = None
- A-Z = Custom Configuration

[NUMBER OF POSITIONS Available 1 thru 26 W/Mounting End 1 thru 28 w/o Mounting Ends

[HARDWARE OR TOP TERMINATION DESIGN

- 0 = Standard Zinc Plated Steel Screw, Combo Head
- 1 = Wire Clamp Screw
- 2 = Nickel Plated Brass Screw
- 3 = Stainless Steel Screw
- 5 = Without Screws
- 6 = Quick Connects, Screw Type*
- 8 = Captivated Screw

*See accessories

Single Row

BARRIER STYLE

Series 43000 Accessories

WIRE CLAMP

4300 – Wire clamp captivated to No. 6-32 or 8-32 screw eliminates need for lugs. Accepts up to No. 12AWG wire. May be ordered factory installed or loose.

MARKING STRIPS

4300 – Pre-punched black fiber . . . mounts under block. May be imprinted to customer specifications. To order, specify: Part No. 267A19-1 thru 26 (with mounting hole); Part No. 267A218-1 thru 28 (less mounting hole).

COVERS

43000 – Rigid .030" thick self-extinguishing vinyl. Black matte-finished on both sides. May double as marking strip when imprinted with white ink. Complete with spring clips for attaching to mounting positions.

Part No. 0196__000, 1 thru 26 poles.

Example: 019605000 would be a 5 pole cover

TINNERMAN NUT



4300 – for special mounting of terminal blocks less mounting position.

Part No. TN-375.

TERMINAL BLOCK JUMPERS






4300 – Plated brass "Rooster comb" design Type 267A42 permits connections of two to 18 poles.

To order, specify; Part No. 267A42-__ .

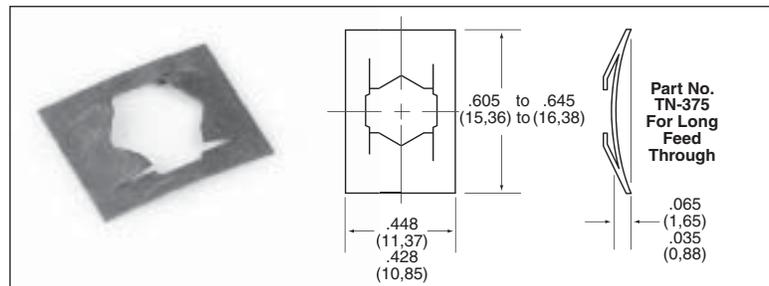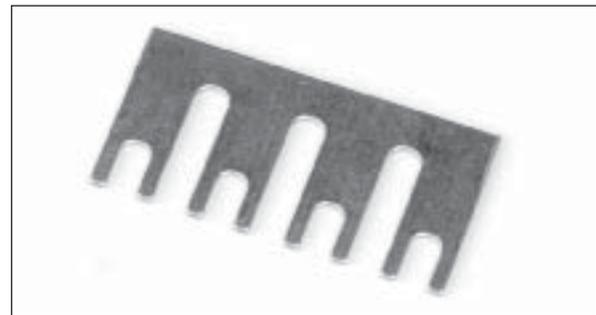

QUICK-CONNECT TERMINALS QUICK-CONNECT TERMINALS


43000 – Available with .250" x .032" quick-connect tabs of tin-plated brass, held in place by terminal screws. Six styles . . . one to six terminations per pole. Factory-assembled or supplied bulk.

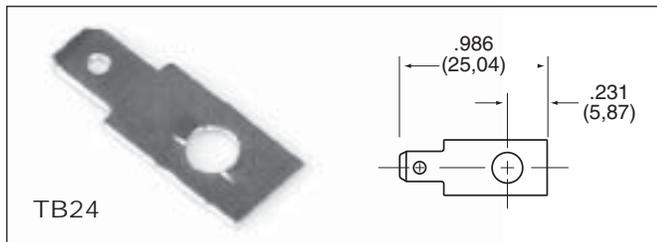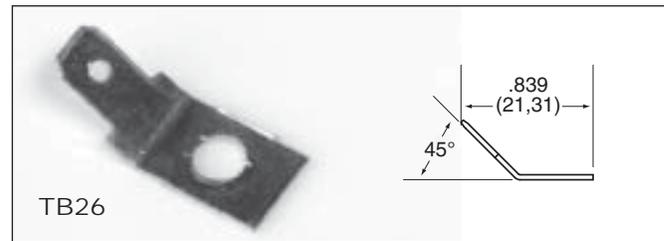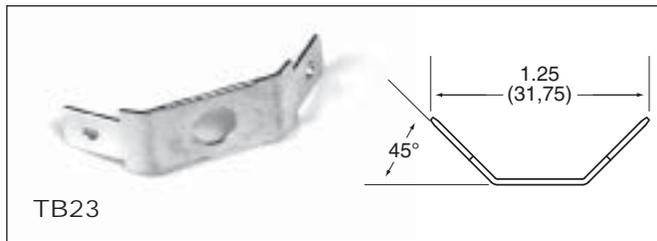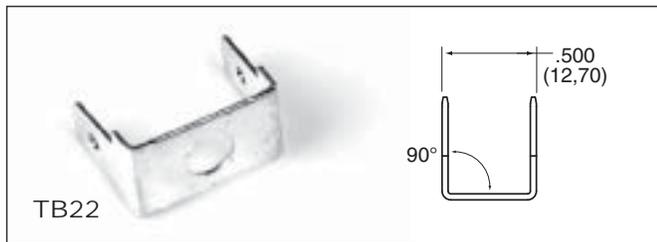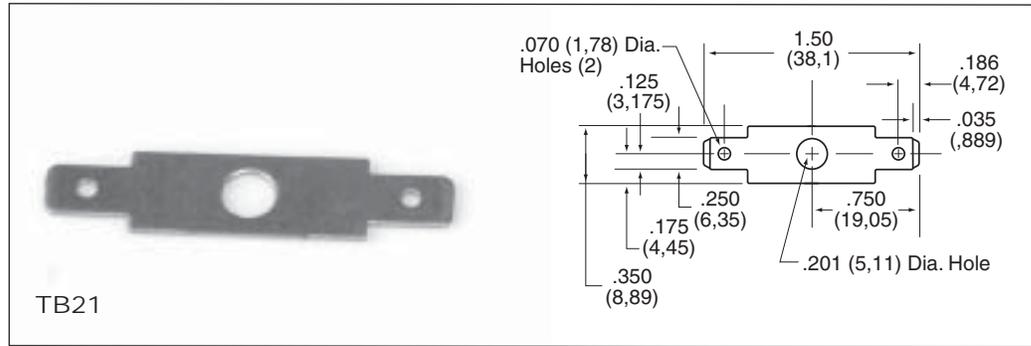


Single Row

BARRIER STYLE

PC BOARD DRILLING DIMENSIONS

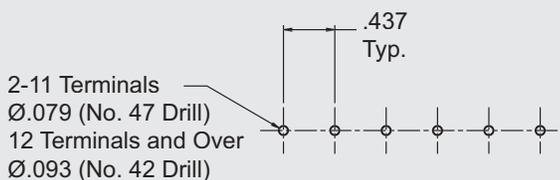

RECOMMENDED PANEL CUTOUT DIMENSIONS

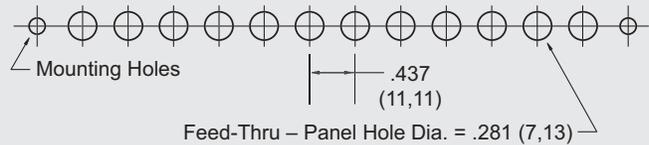

Dimensions are in inches and millimeters unless otherwise specified. Values in parentheses are metric equivalents.