
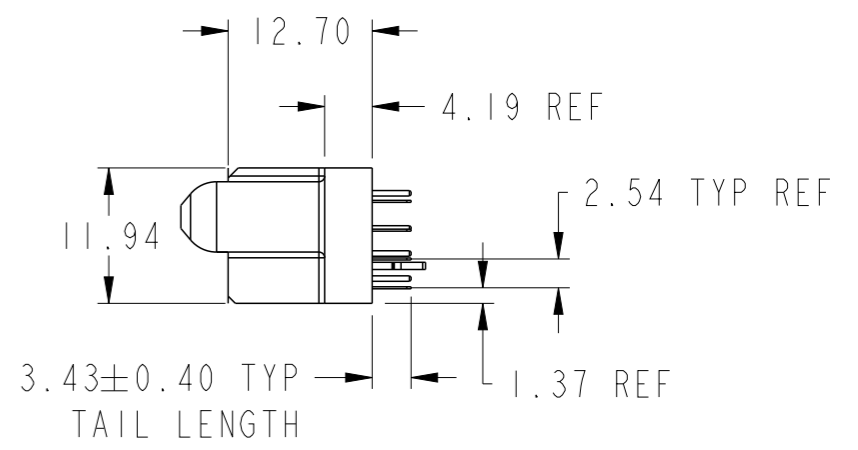
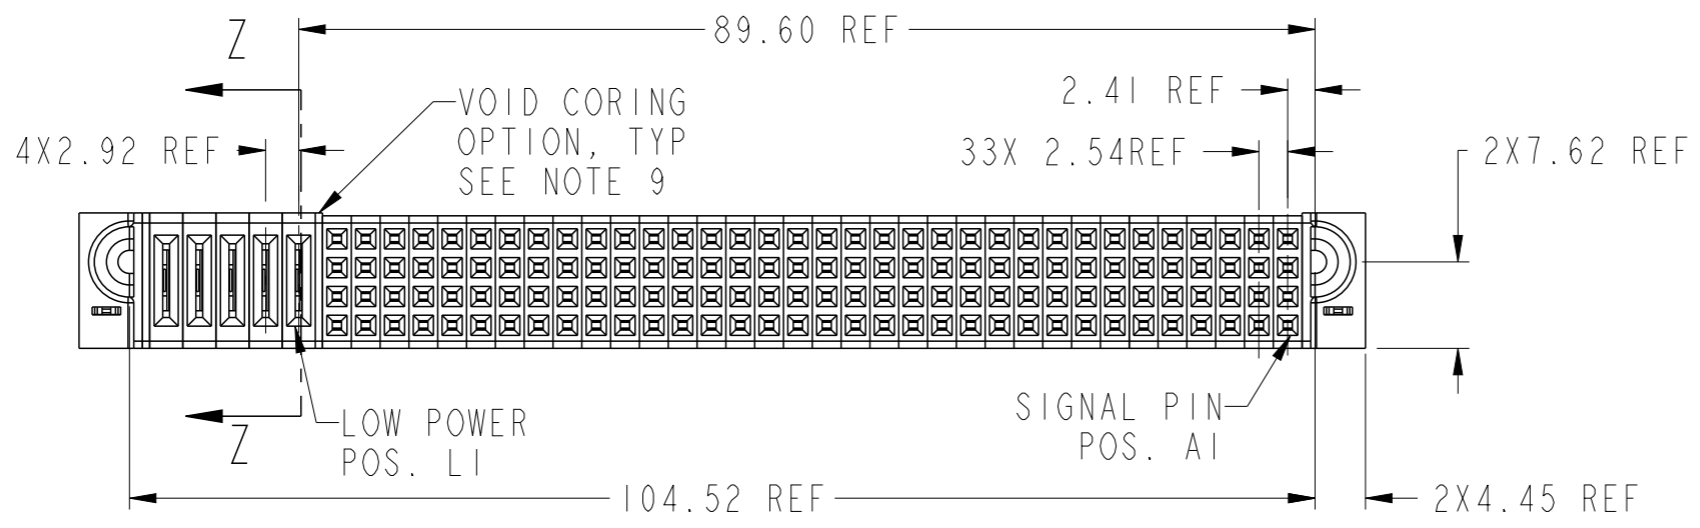
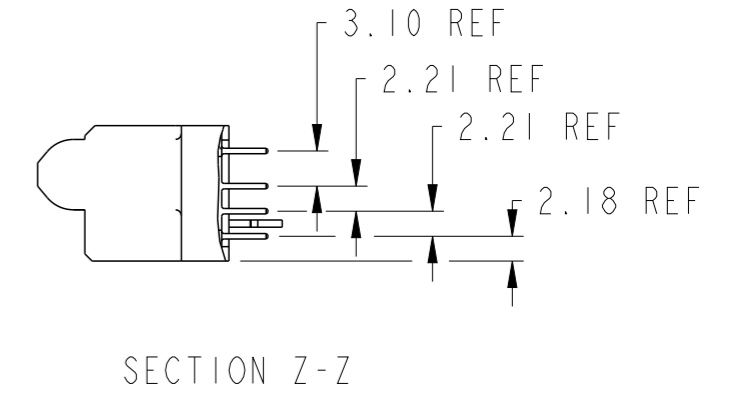
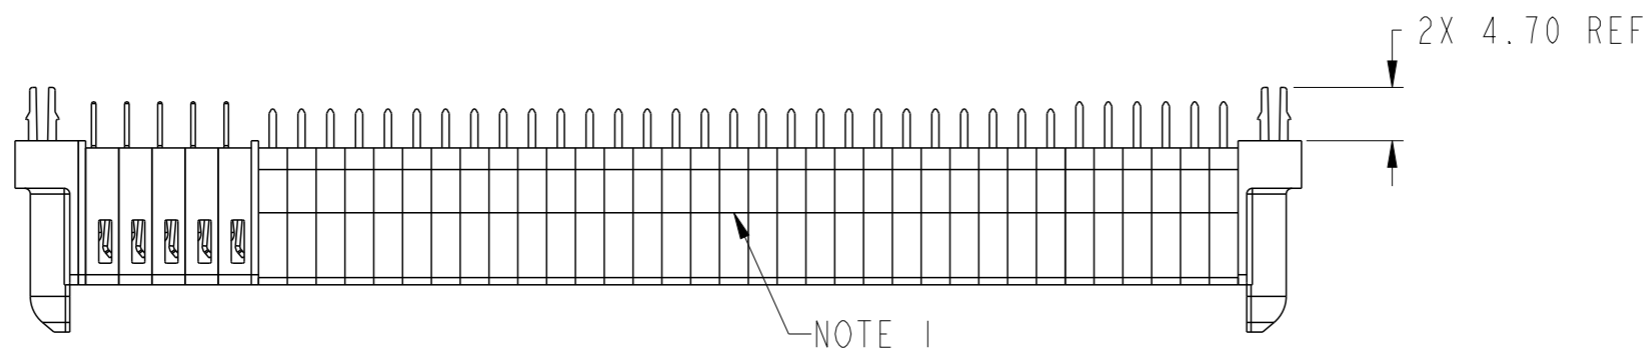



PRODUCT NUMBER SEE SHEET 2

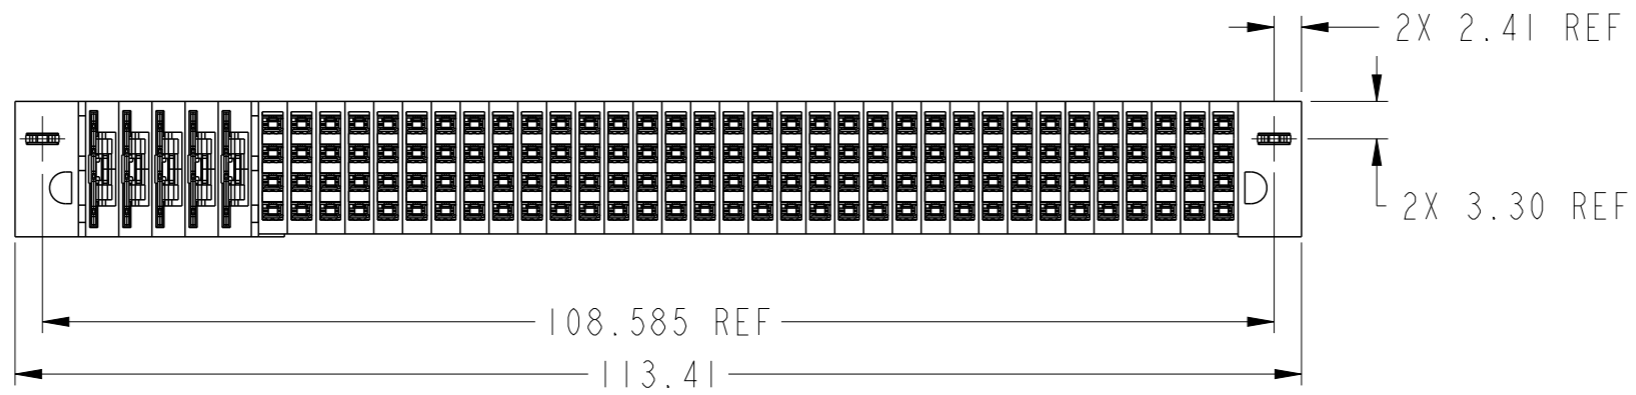

Copyright FCI.

spec ref		dr	Eddy Zeng	2013/11/10	projection 	MM ←→	size	A3	scale	3:2
tolerance std ASME Y14.5		eng	Xie Bob	2013/11/15			ecn no	-		
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Li-He	2013/11/15			rel level	Released		
surface	✓	linear	0.X	±0.50	product family	PowerBlade+	dwg no	10106268-0534001	rev	A
			0.XX	±0.25						
ASME Y14.5	angular	0°	±2°	appr						
				title		136S + 5LP				
		www.fci.com		cat. no.		Product - Customer Drw		sheet 1 of 3		

PRODUCT NO.	ROWS	LOW POWER	SIGNAL																								E2	CODE	DESCRIPTION												
		E1	P5	P4	P3	P2	P1	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16		15	14	13	12	11	10	9	8	7	6	5	4	3	2
10106268-0534001LF	DCBA																																						HA	METAL HOLD DOWN	
																																						LR	STD LOW POWER CONTACT (3.43)		

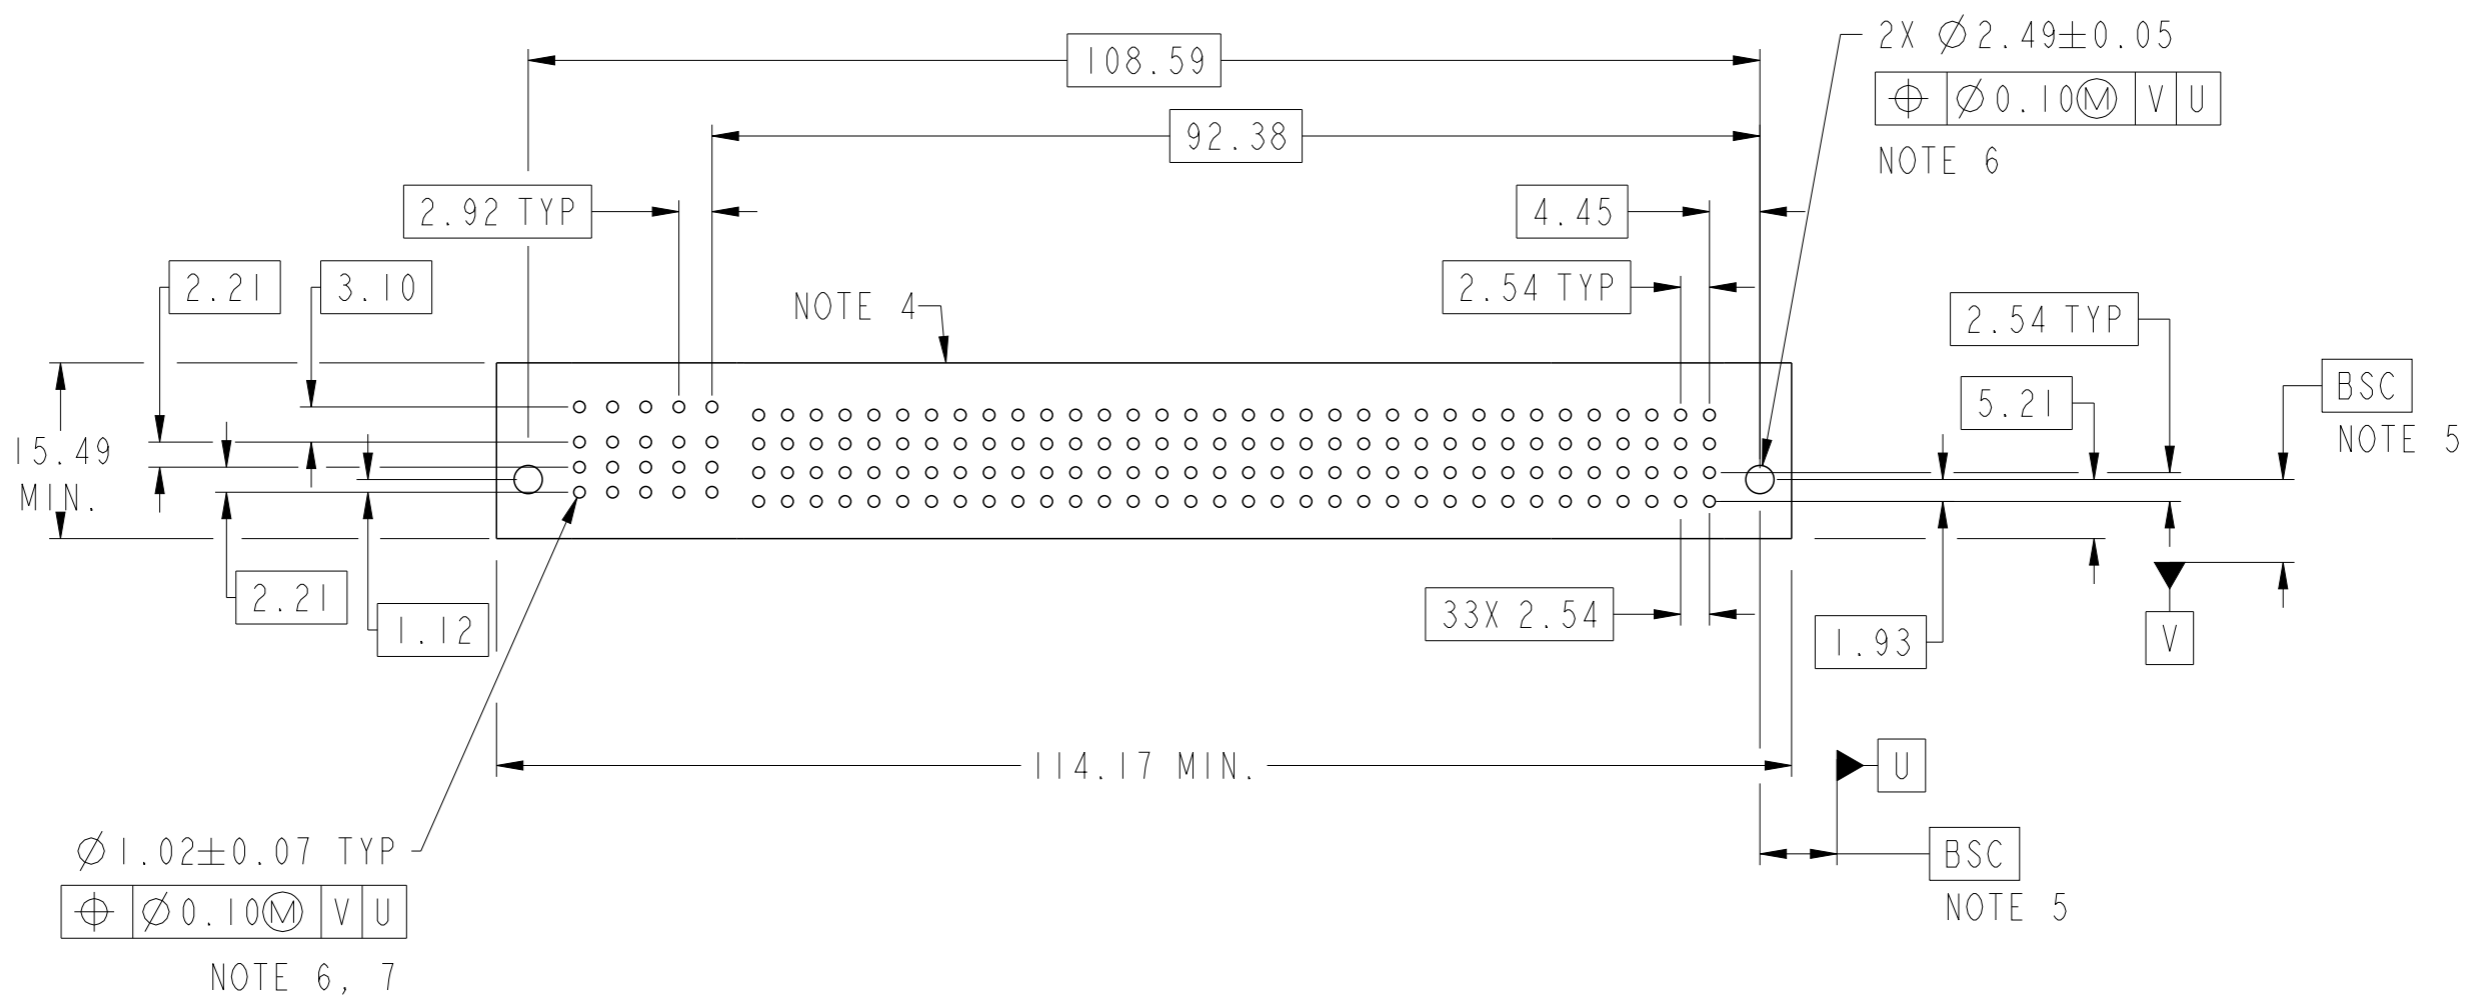

dr	Eddy Zeng	2013/11/10	projection	MM	size	A3	scale	3:2	
eng	Xie Bob	2013/11/15				ecn no		-	
chr	Li-He	2013/11/15	product family	PowerBlade+	rel level	Released			
appr	Pei-Ming Zheng	2013/11/15							
www.fci.com		cat. no.	136S + 5LP VT STB RECEPTACLE		dwg no	10106268-0534001		rev	A
Product - Customer Drw			sheet 2 of 3						

Copyright FCI.

A

B

C

D

A

B

C




D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.  
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.  
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL  
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE  
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE  
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.



Copyright FCI.

dr	Eddy Zeng	2013/11/10	projection 	MM 	size	A3	scale	1:1
eng	Xie Bob	2013/11/15			ecn no	-		
chr	Li-He	2013/11/15			rel level	Released		
appr	Pei-Ming Zheng	2013/11/15			product family	PowerBlade+		
		title 136S + 5LP VT STB RECEPTACLE		dwg no 10106268-0534001	rev A			
<a href="http://www.fci.com">www.fci.com</a>		cat. no.	Product - Customer Drw		sheet 3 of 3			