
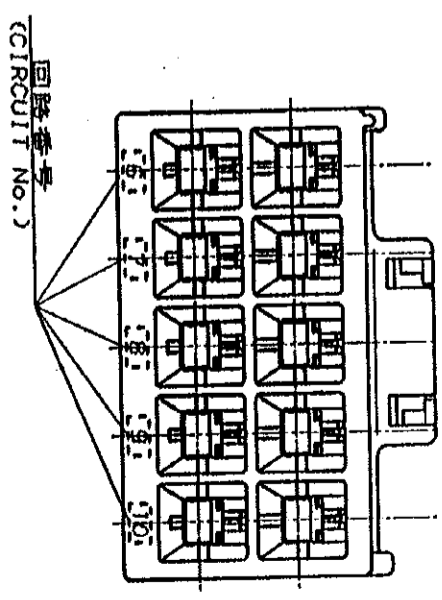
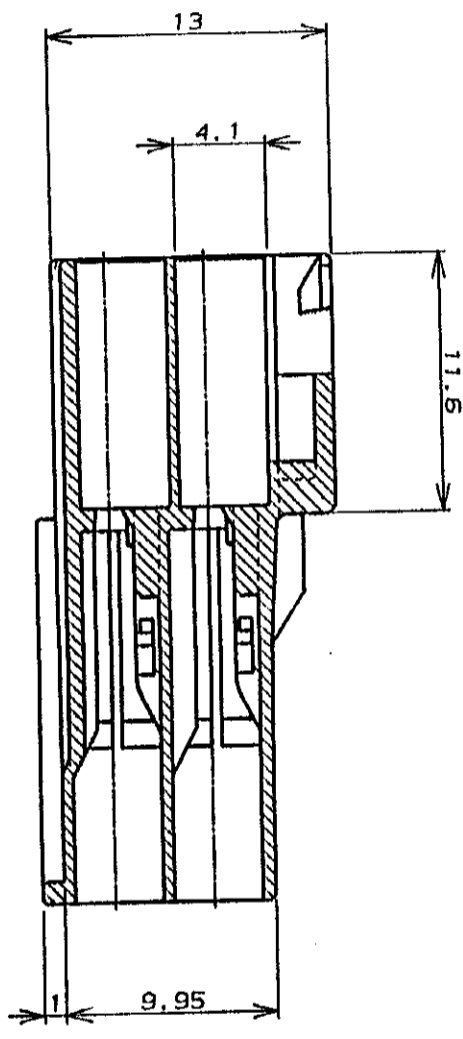
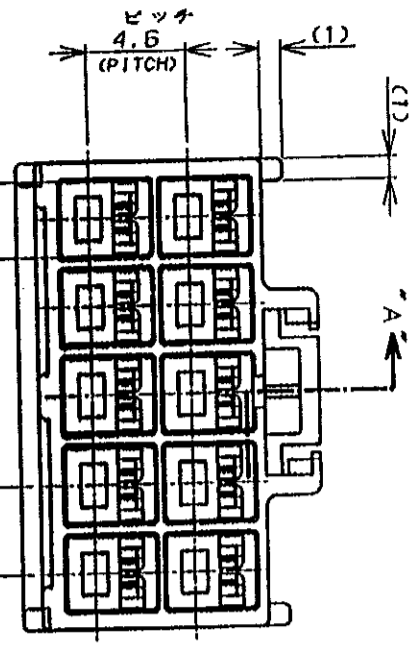


単位: ㎜ DIMENSIONS IN MM. DO NOT SCALE PRINT

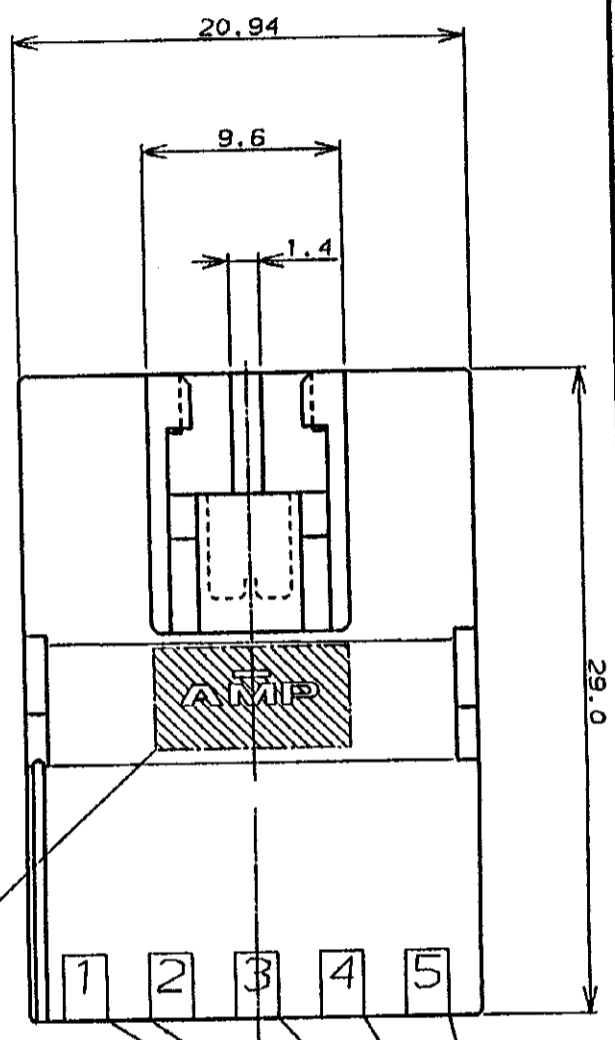

- 注:
1. 適用製品規格: 108-5302
 2. 適用コネクタト型番
タブ・コネクタト: 175150-11C(20-16AWG)
175149-11C(26-22AWG)
 3. 嵌合相手側製品型番
プラグ・ハウジング: 176277-11
リセ・コネクタト: 175152-11C(20-16AWG)
175151-11C(26-22AWG)
 4. 取扱説明書: IS-503J

- NOTES:
1. PRODUCT SPEC.: 108-5302
 2. APPLICABLE CONTACT P/N
TAB CONTACT: 175150-11C(20-16AWG)
: 175149-11C(26-22AWG)
 3. MATING CONN. P/N
PLUG HSG: 176277-11
REC CONTACT: 175152-11C(20-16AWG)
175151-11C(26-22AWG)
 4. INSTRUCTION SHEET: IS-503J

TR	REV	DATE	BY	CHK	DR	CHK	DATE
A	1	11/23/89	M.S.	N.Y.F.	H.S.	N.Y.F.	11/28/89
0	1	11/23/89	M.S.	N.Y.F.	H.S.	N.Y.F.	11/28/89

材料 (MATERIAL)	材料 (MATERIAL)	仕上 (FINISH)	仕上 (FINISH)
銅 (COPPER)	銅 (COPPER)	ニッケルメッキ (NICKEL PLATING)	ニッケルメッキ (NICKEL PLATING)
絶縁体 (INSULATOR)	絶縁体 (INSULATOR)	エポキシ樹脂 (EPOXY RESIN)	エポキシ樹脂 (EPOXY RESIN)

規格 (SPEC.)	規格 (SPEC.)	寸法 (DIMENSIONS)	寸法 (DIMENSIONS)
108-5302	108-5302	10.2	10.2
108-5303	108-5303	10.3	10.3
108-5304	108-5304	10.3	10.3

AMP
 AMP UNIVERSAL POWER CONN. 3.96mm PITCH CAP HOUSING 10 POS (GR. ROW)

CUSTOMER DRAWING) 参考 図