used for: D-SUB COMBINATION CRIMP

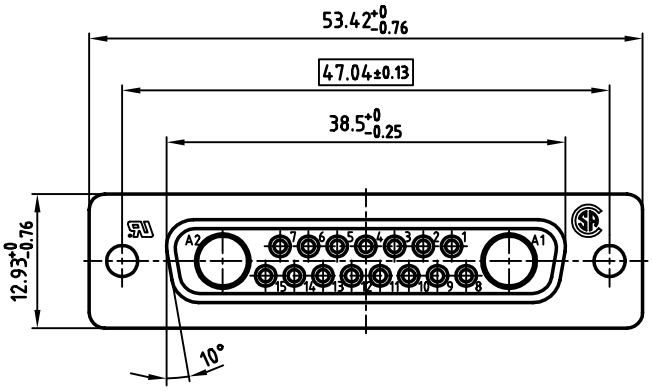

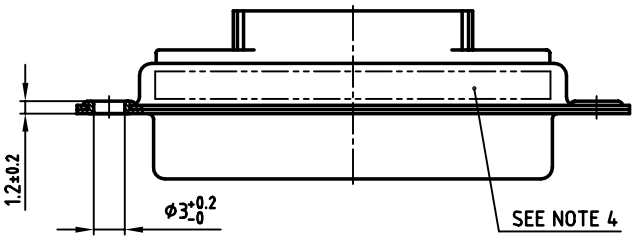



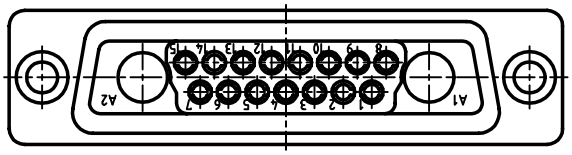

NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. [ ] = CRITICAL DIMENSION: SPC
4. CONNECTOR IS PART MARKED: PART NO: CONEC Y/WW

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

2002	date	name
drawn	07.08.	Schmidt
appd.	07.08.	Mickenbecker
norm		
d-old		

scale: 2:1
material: SEE NOTES

title:
D-SUB COMBINATION FEMALE
17W2S CRIMP STYLE

dwg no: 13K1A669
AutoCAD 2000 | DIN-A 3 | sh: 1/1

part no: 3017W2SXK99A10X

Directive 2002/95/EC „RoHS" Compliant