こ の	
	l




P R O D U C T N U M B E R	SIZE	DIM A	DIM B
69305-003LF	1 x 3	4.0	6.4
69305-004LF	1 x 4	6.0	8.4
69305-005LF	1 x 5	8.0	10.4
69305-006LF	1 x 6	10.0	12.4
69305-007LF	1 x 7	12.0	14.4
69305-008LF	1 x 8	14.0	16.4
69305-009LF	1 x 9	16.0	18.4
69305-010LF	1 x 1 0	18.0	20.4
69305-011LF	x	20.0	22.4
69305-012LF	1 x 1 2	22.0	24.4
69305-013LF	1 x 1 3	24.0	26.4
69305-014LF	1 x 1 4	26.0	28.4
69305-015LF	1 x 1 5	28.0	30.4
69305-016LF	1 x 1 6	30.0	32.4
69305-017LF	1 x 1 7	32.0	34.4
PRODUCT NUMBER 69305-0XXLF			

NOTES:

- I MATERIAL : PA66 25% GLASSFILLED, UL94V-0 COLOR BLACK.
- 2 PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHERS REGULATIONS AS DESCRIBED IN GS-47-004.

TOTAL NUMBER OF POS 03 UP TO 17

- 4 THIS PRODUCT IS NOT INTENDED TO BE EXPOSED TO MANUFACTURING SOLDER PROCESSES.
- INDICATES POS I, WHEN MATED WITH 95000 SERIE.
- 6 FOR USE WITH MINITEK CRIMP TO WIRE CONTACT 77138 (26-30AWG) OR 10044403 (22-24AWG)
- 7 PRODUCT SPECIFICATION AS PER 110-036, CRIMP RECOMMENDATIONS AS PER GS-20-058

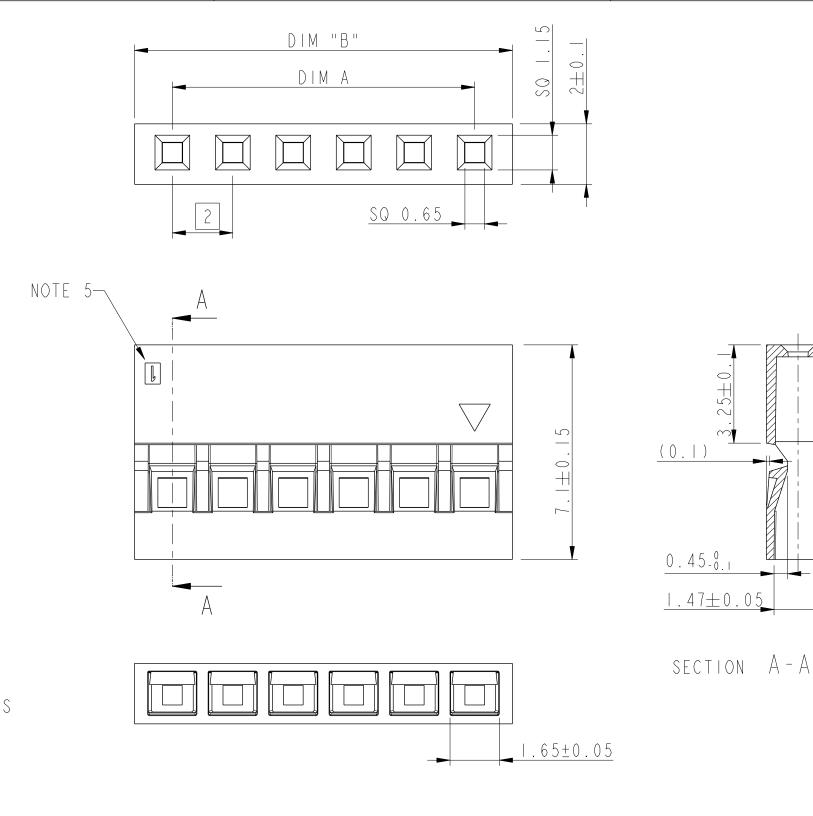

					Mat	erial	NOTE I			Specref				
					Mat	code	N / A			. /	tolerance	projection	MM	
			Неа	leattreat		N / A								
			Plating/Finish N/A			N / A					-	-		
		Dr E.KROPIEWNI			1999-11-08				size	Scale	;			
ļ	rev	ecn no	d r	date	Eng	L. GRI	EEN	1999-11-08	Produc	† family	MINITEK	A 3	8:1	
	L		нтв		Chr	J.COMI	PAGNON	2012-08-30	Model	Name	69305	ECN	I .	
ı	М	F12-0803			Appr			2012-08-30		Revision		REL Level	proi_rel	A 0 5 A
	N	F-23064	LMU	2016-01-18	<u> </u>			2012 00 30	Model	1101131011		INCL LOVOI	pror_rer	1
	-	-	-	-	F		<del>+</del> M	NITEK CT'	W HOU	SING	0 0 0 0 0			Rev.
	-	-	-	-			· —			0 1 11 0	ຫ ×	69305		<sub>  1</sub>
	-	-	-	-		<b>-</b>	+ 511	NGLE ROW			ρ			N
	-	-	-	-	Pro/	E file	catalog no				CUSTOMER		sheet I of	1

 $\pm\,$ 0.3

±0.I3

±0.050

TOLERANCES UNLESS OTHERWISE SPECIFIED 0 . X

0.XX

0 . X X X

LINEAR

ANGULAR

PDS: Rev:N

3

STATUS:Released

4

Printed: Jan 19, 2016