

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube		
Plating	Electro-Tin		
Wire Size	2/0 AWG		
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric		
Wire Strip Length	1-5/8 in.		
Stud Size	1/2 in.		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90°C		
C.S.A Certified Wire Connector	Yes		
Panduit Color Code on Barrel	BLACK		
Panduit Die Index No. on Barrel	P45		
Alternate Industry Die Index No. () on Barrel	(13)		





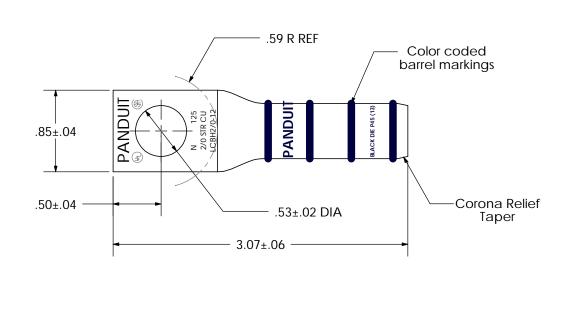

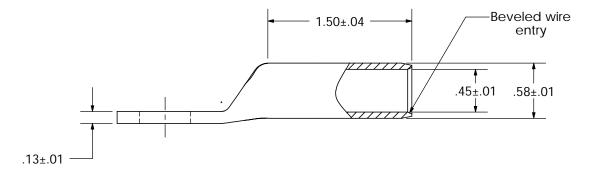

						CORP. TINLEY PARK, ILLINOIS
						LCBH2/0-12-X
00	7/02	SAB	DRL	RELEASED	10327	Copper Lug - High Voltage, One-Hole, Long Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCBH2_0-12-CUST