

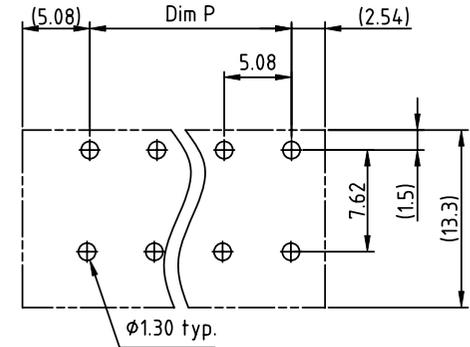
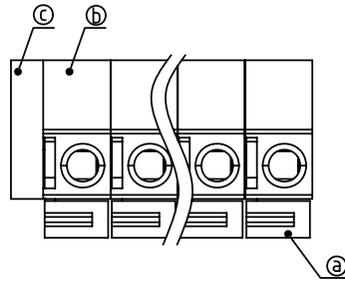


PRODUCT NUMBER	PITCH
HAxx00x000JOG	5.08 mm

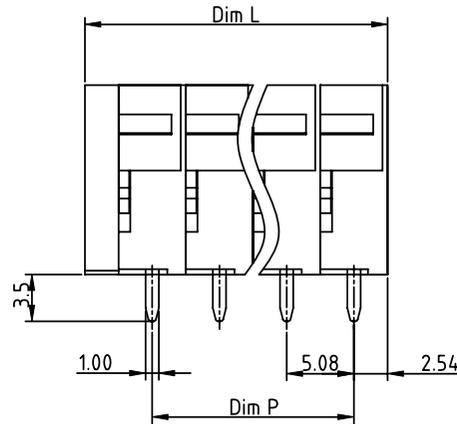

RECOMMENDED P.C.B LAYOUT  
TOP VIEW

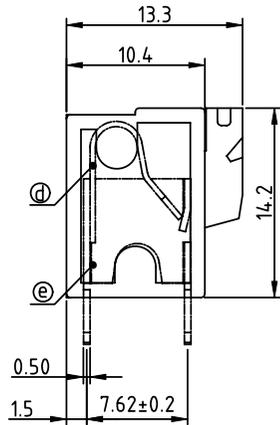

Material:

- Item (a) Lever: Thermoplastic (UL94V-0) Orange RAL2011/P
- Item (b) Terminal body: Thermoplastic (UL94V-0)
- Item (c) cover: Thermoplastic (UL94V-0)
- Item (d) Spring clamp: Stainless steel
- Item (e) Pin: Brass. Tin plated

Electrical cULus/VDE

- Voltage rating: 300VAC/250VAC
- Current rating: 10A/10A
- Wire range: 0.75-1.5mm<sup>2</sup>
- Solid wire (AWG): 14-24
- Stranded wire (AWG): 14-24
- Wire strip length: 9-10mm
- Withstanding Voltage: 1.6KV/2KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus VDE

N=Number of poles  
Dim L=Nx5.08+2.54  
Dim P=(N-1)x5.08

POLES	Dim L	Dim P
1p	±0.10	
2-6p	±0.15	±0.10
7-12p	±0.20	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

PART NO.: HA xx 00 x 0 00JO G

	End stackable	No. of poles	Color	RoHS compliant
0	0	2	Black (RAL9005)	(lead<4%)
01	1 poles	3	Red (RAL3001/D)	In copper Alloy
02	2 poles	4	Orange(RAL2011/P)	
...	...	5	Yellow(RAL1018/A)	
24	24 poles	6	Green(RAL6018/T)	
		8	Blue (RAL5015/A)	
		9	Grey(RAL7004/P)	
		9	White(RAL1102)	
		C	Multiple colors	

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection	product family	
ltr	ecn no	dr	date		TERMINAL BLOCK	
B		HF	081114		title	
					TERMINAL BLOCK	
					SPRING CLAMP, 90D WIRE INLET	
					scale	
					dwg no	
				sheet 1 of 1		
				size		
				A4		
				type		
				CUSTOMER Drawing		
sheet index	revision	B				
	sheet	1				