THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	TAB SIZE	WIRE RANGE AWG	COLOR	MAX. INSUL.	DIMENSIONS in.		
					A ±.03	B ±.02	C ±.02
DV10-250C	.250 X .032 (6.4 X 0.81)	12-10	YELLOW	.229 (5.82)	1.04 (26.42)	.30 (7.62)	.12 (3.05)

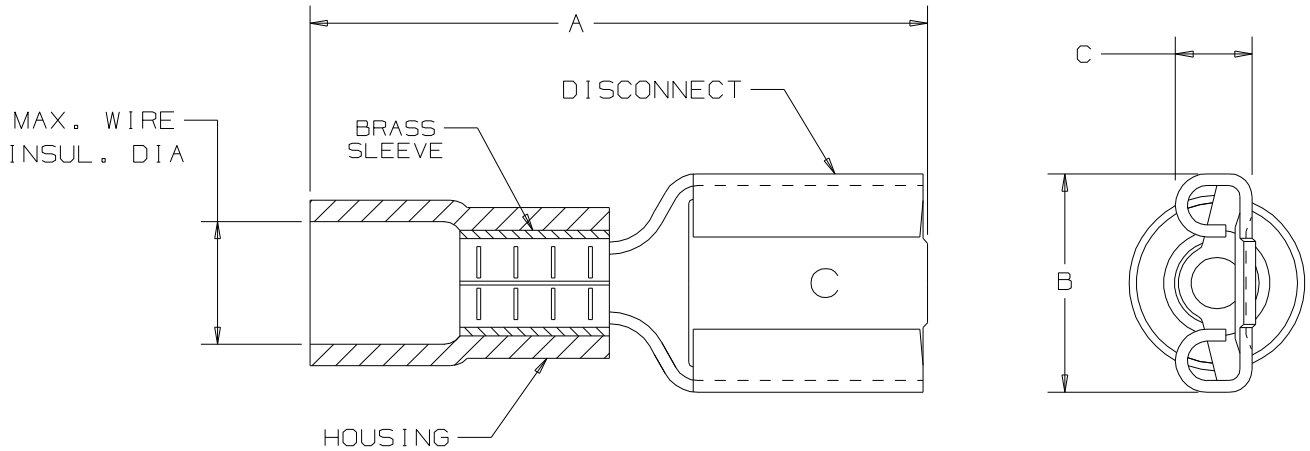

NOTES:

1. 600 V MAX VOLTAGE RATING.
   194° F (90° C) MAX TEMPERATURE RATING.
   STRANDED COPPER WIRE ONLY.

2. MATERIAL:
   A. STAMPING: CDA-260 BRASS, TIN PLATED
   B. HOUSING: VINYL

3. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.

4. WIRE STRIP LENGTH 9/32 $^{+1/32}_{-0}$ (7.1 $^{+.8}_{-0}$)

5. PACKAGE QUANTITY: -L = 50
   -D = 500

6. INSTALLATION TOOLS: CT-100, CT-160, CT-260, CT-460, CT-550, CT-1550, CT-1551

A41730_00

REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST
00	12/05	DAW		RELEASED	TR00060		

PANDUIT CORP. TINLEY PARK, ILLINOIS

FEMALE DISCONNECT FOR COMPRESSOR TABS, VINYL INSULATED, .250 x .032

DRAWN BY	CHK'D	SCALE	DRAWING NO./CAD FILENAME
DAW		NONE	A41730