


VIEWS SHOWN PRE-TERMINATED

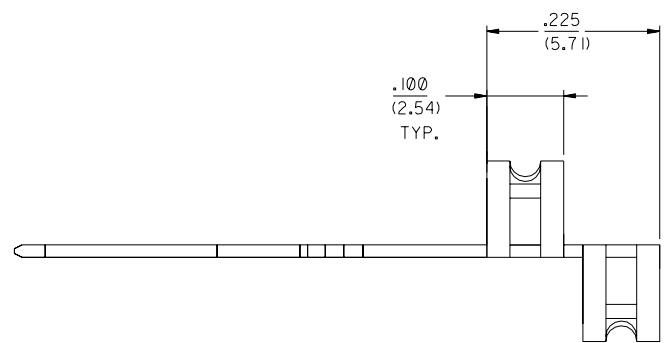

- NOTES:
- MATERIAL: COPPER ALLOY.
  - PLATING - CONTACT AREA: 30 MICROINCHES/(0.76 MICROMETERS) MINIMUM GOLD OVER NICKEL UNDERPLATE OVERALL. OR GOLD FLASH OVER 40 MICROINCHES/(1.00 MICROMETERS) MINIMUM PALLADIUM-NICKEL OVER NICKEL UNDERPLATE OVERALL.
  - PLATING -COAX BRAID AREA : 150 MICROINCHES/(3.81 MICROMETERS) MINIMUM TIN OVER NICKEL UNDERPLATE OVERALL.
  - PARTS ARE SHIPPED ON REELS: QUANTITY TO BE 4,000 PARTS PER REEL
  - REFER TO PS-71754-9999 FOR ASSEMBLY AND TERMINATION DETAILS.
  - "X" IN STATUS COLUMN REFLECTS NOT TOOLED
- NOTE FOR LEAD FREE CONVERSION:  
THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO ROHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

ITEM PART NUMBERS AND PLATING

STATUS		
A	71198-1001	30 MICROINCHES/(0.76 MICROMETERS) MINIMUM GOLD OVER NICKEL UNDERPLATE OVERALL IN CONTACT AREA 150 MICROINCHES MINIMUM TIN OVER NICKEL UNDERPLATE OVERALL IN COAX BRAID AREA.
X	71198-1002	GOLD FLASH OVER 40 MICROINCHES/(1.00 MICROMETERS) MINIMUM PALLADIUM-NICKEL OVER NICKEL UNDERPLATE OVERALL IN CONTACT AREA, 150 MICROINCHES MINIMUM TIN OVER NICKEL UNDERPLATE OVERALL IN COAX BRAID AREA.

C	LEADFREE ECN# UCF2004-0285 DMORGAN 04/04/23
B	REVISED PEG HOLE PER ECN# U70490 SCARTH 97/03/07
A	RELEASE DRAWING ECR U70012 96/07/17 MURPHY

DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		REVISE ONLY ON CAD SYSTEM	
3 PLACE ± .010	INCH	---	METRIC
2 PLACE ±	---	± 0.25	---
1 PLACE ---	±	---	---
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
DRWG. BY: MOS	CHK'D. BY: PAM	FILE NAME: ST119851	DRWG. NO.: SD-71198-100*
APP'D. BY: JWN	SCALE: 8: 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	DATE: 12/13/95