
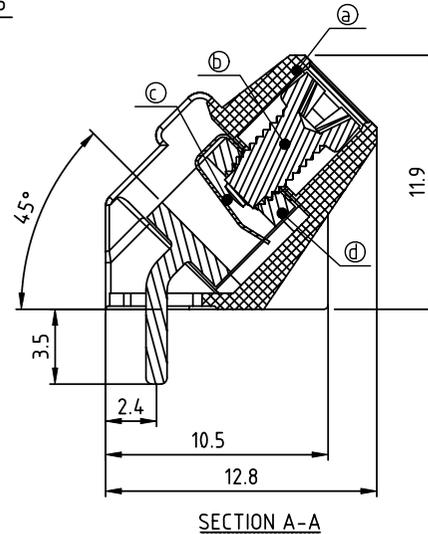
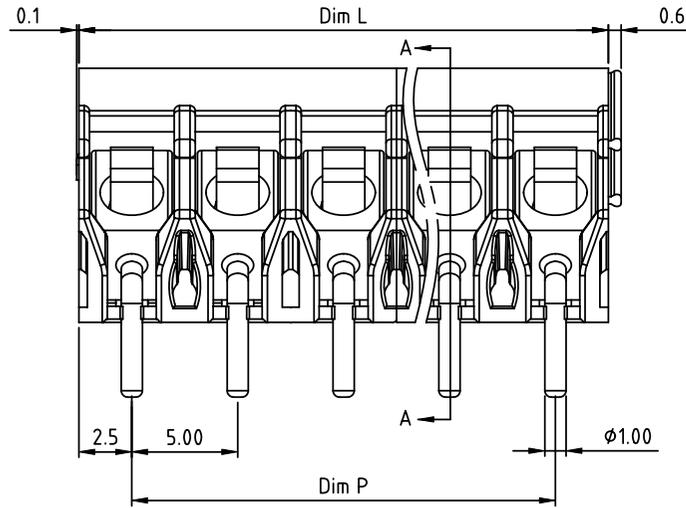
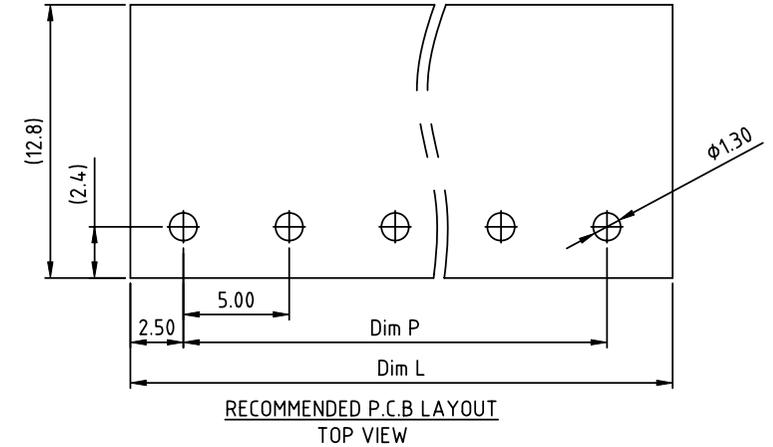


PRODUCT NUMBER	PITCH
KZxx70x100J0G	5.00 mm

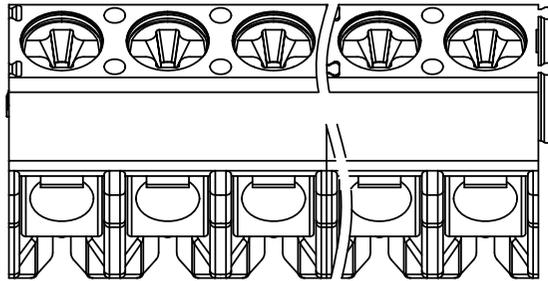

Materials

- ItemⒶ Terminal housing : Thermoplastic (UL94V-0)
- ItemⒷ Terminal screw: Steel Zinc plating "+/-" slot type
- ItemⒸ Wire guard : Stainless steel
- ItemⒹ Terminal body: Brass(CuZn) ,Tin Plated

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 15A
- Wire range:
 - Solid wire(AWG): 12-26
 - Stranded wire(AWG): 12-26
- Torque(Lb-In): 3.5
- Screw: M2.6
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:

N = Number of poles
Dim L = N x 5.0
Dim P = (N-1) x 5.0

Poles	Dim.	Dim L	Dim P
2-6p		±0.15	±0.15
7-12p		±0.25	±0.25
13-18p		±0.35	±0.35
19-24p		±0.40	±0.40

PART NO.: KZ xx 7 0 x 1 00J0 G

- End stackable
- No. of poles
- 0 2 poles
- 02 3 poles
- 03 ...
- 24 24 poles
- Body Color
- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)
- RoHS compliant (lead<4%) In copper Alloy

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK
ltr	ecn no	dr	date	tolerances unless otherwise specified	title TERMINAL BLOCK
				angles 	scale MM
				X±0.5	WIRE PROTECTOR, ROUND HOLE, 45D WIRE INLET
				X.X±0.3	dwg no
				X.XX±0.1	sheet 1 of 1 size
dr	EVIN ZHONG	040314			KZxx70x100J0G
enrg	EVIN ZHONG	040314			A4
chr	HANKE FENG	040314			type
appd	SHI JUN	040314			CUSTOMER Drawing
sheet index	revision	A			
	sheet	1			