


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

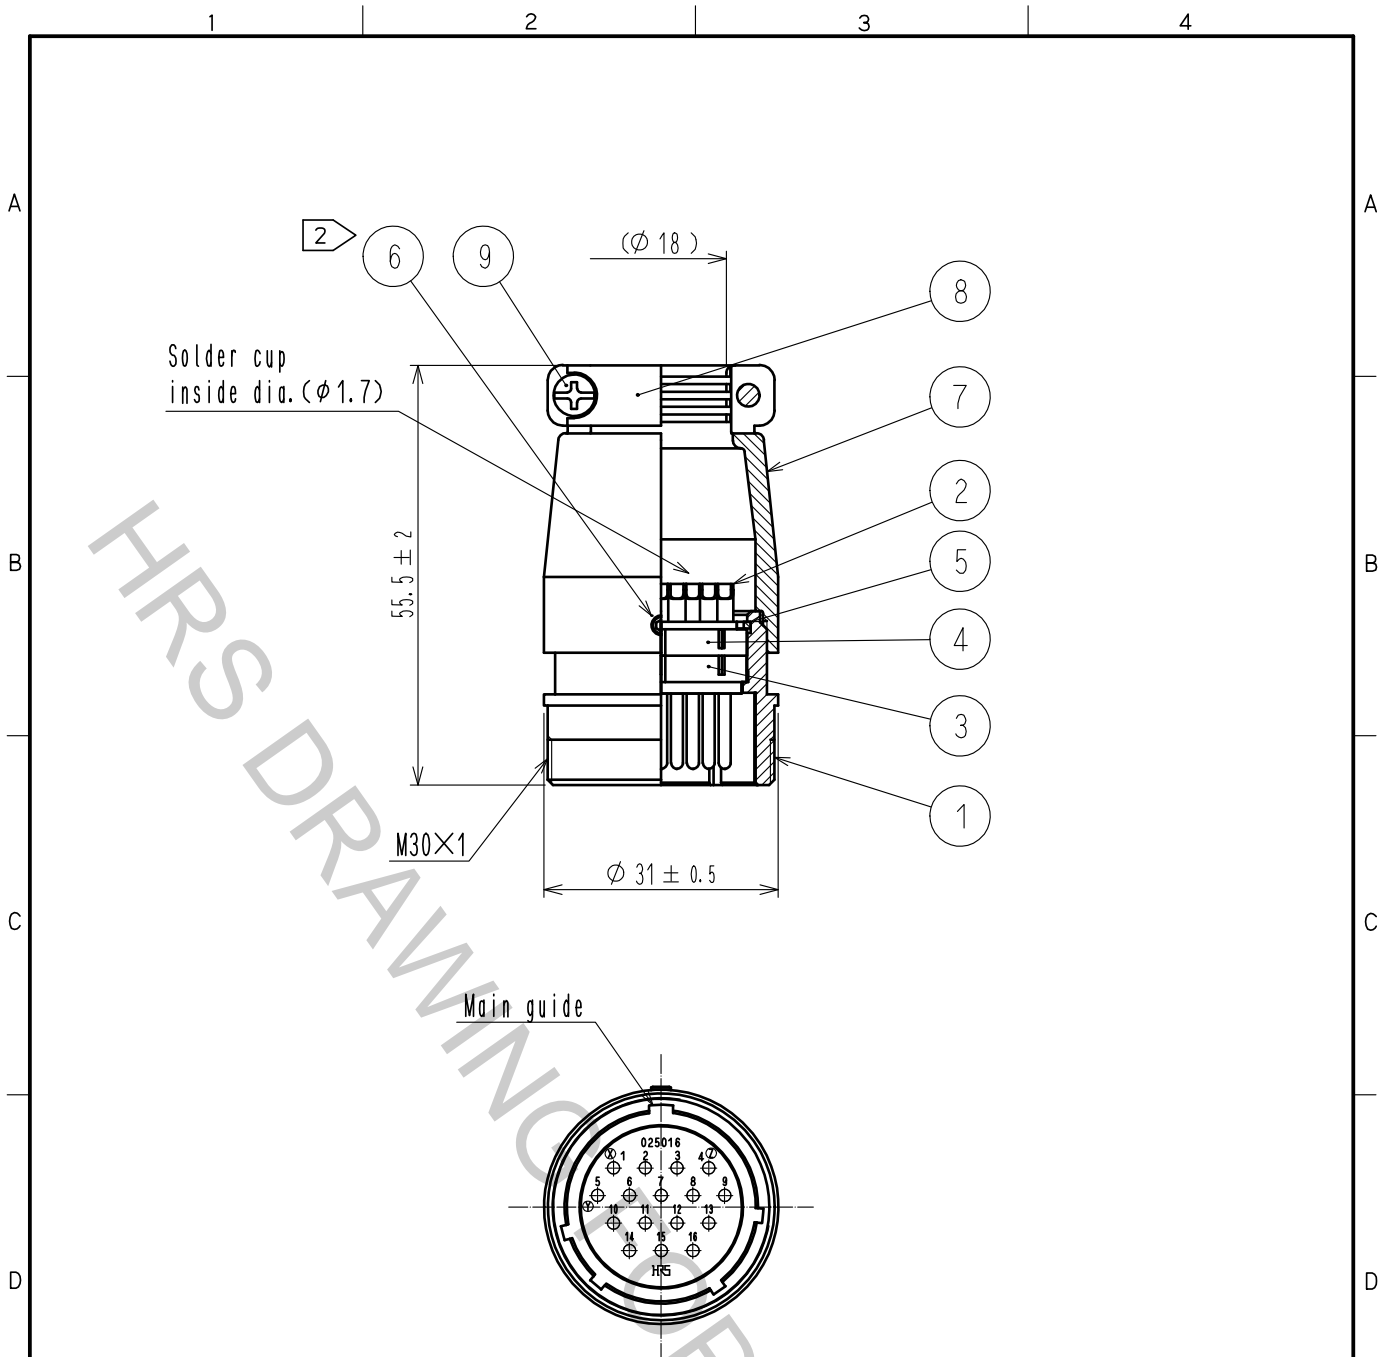

Notes 1. Rotation examples of ref. no. ① and ⑦ are shown.
 2. Across flats of hexagon head of ref. no. ⑥ to be 1.27mm.

5	Phosphor bronze	Nickel plating					
4	Phenol formaldehyde	(Black), UL94V-0	9	Brass	Nickel plating, M3×0.5×10		
3	Phenol formaldehyde	(Black), UL94V-0	8	Aluminum alloy	Matte finish nickel plated		
2	Copper alloy	Silver plating	7	Aluminum alloy	Matte finish nickel plated		
1	Aluminum alloy	Matte finish nickel plated	6	Steel	Nickel plating Hex socket screw M2.6×0.45×2		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

UNITS mm		SCALE 1 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII	16.03.03	DRAWING NO.	EDC-025486-00-00		
		CHECKED : EJ. KUNII	16.03.03	PART NO.	JR25JK-16P		
		DESIGNED : TY. TAKAHASHI	16.03.03	CODE NO.	CL114-0539-0-00		
		DRAWN : TY. TAKAHASHI	16.03.03				1/1