


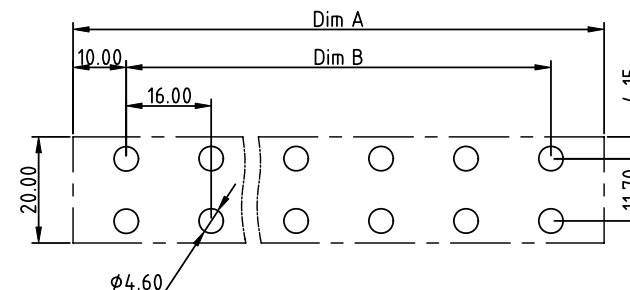
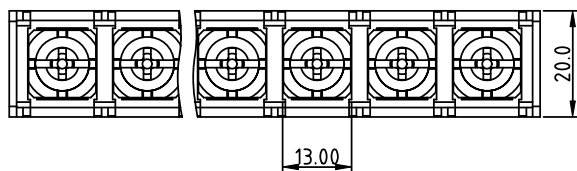




PRODUCT NUMBER	PITCH
YK901xx0x0JOG	16.00mm

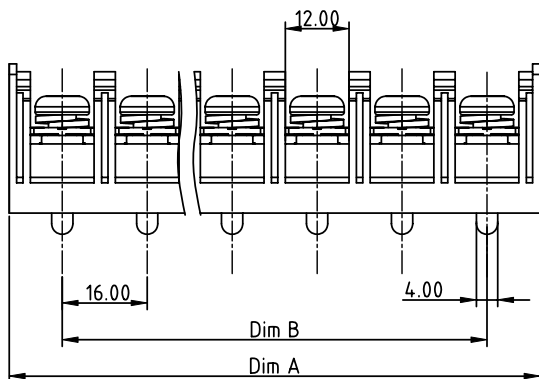

RECOMMENDED P.C.B LAYOUT
TOP VIEW



MATERIALS & ELECTRICAL

RATED VOLTAGE & CURRENT: 600 V, 65A

WITHSTAND VOLTAGE: AC 3000 V/Min

INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V

OPERATING TEMPERATURE RANG: -40 °C ~ +115°C

SCREW TORQUE VALUE: 26 Lb-In.

WIRE RANGE: 10 - 6 AWG


1) HOUSING: THERMOPLASTICS, UL94-V0 BLACK

2) TERMINAL: BRASS, 1.6t

3) TERMINAL SCREWS WITH WASHER: STEEL, M6.0

4) TERMINAL NUT: STEEL M6.0, NICKEL PLATED

APPROVAL: us




DIMENSION

Dim A	$N \times 16.0 + 4.0$
Dim B	$(N-1) \times 16.0$

N=Number of poles

Poles	Tolerance
2p-6p	± 0.40
7p-10p	± 0.50

PART NO.: YK 901xx 0 x 0 JOG

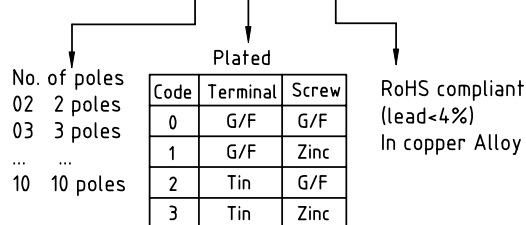

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection	product family
ltr	ecn no	dr	date		TERMINAL BLOCK
tolerances unless otherwise specified				MM	title
angles				scale	TERMINAL BLOCK
X°±1'					BARRIER TYPE
dr EVAN LU 061114					dwg no
enr EVAN LU 061114					sheet 1 of 1
chr HANKE FENG 061114					size
appd SHI JUN 061114					A4
sheet index	revision sheet	A	1	type	CUSTOMER Drawing