


NOTE:

- MATERIAL:  
HOUSING: NYLON 6T (E630NK), UL94V-0  
TERMINAL: C2700 H
- FINISH:  
TERMINAL: GOLD AT CONTACT,  
G/F OVER  $1\mu\text{m}(40\text{u}'' )$  MIN Ni OVER ALL
- SPEC. :  
PRODUCT SPEC: GS-12-629  
PACKING SPEC: GS-14-1517
- THE HSG. WILL WITHSTAND EXPOSURE TO 260C PEAK TEMP. FOR 10 SEC. IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- MATING SIDE LENGTH: 2.50MM MIN.
- PRODUCT NUMBERING:  
200218 3 2 - XXX XX X X LF

LEAD FREE  
 PLATING:  
 1: G/F ALL OVER  
 4:  $0.25\mu\text{m}(10\text{U}'' )$  GOLD AT CONTACT  
 8:  $0.76\mu\text{m}(30\text{U}'' )$  GOLD AT CONTACT  
 PACKING  
 T: TUBE  
 D: TUBE + CAP  
 C: REEL + CAP (16 PIN)  
 PIN COUNT  
 04, 06, 08, ..., 48, 50  
 ( EVERY EVEN PIN )  
 STACK HEIGHT "K"  
 EXAMPLE: 045-4.5MM  
 IN 0.5MM INCREMENT

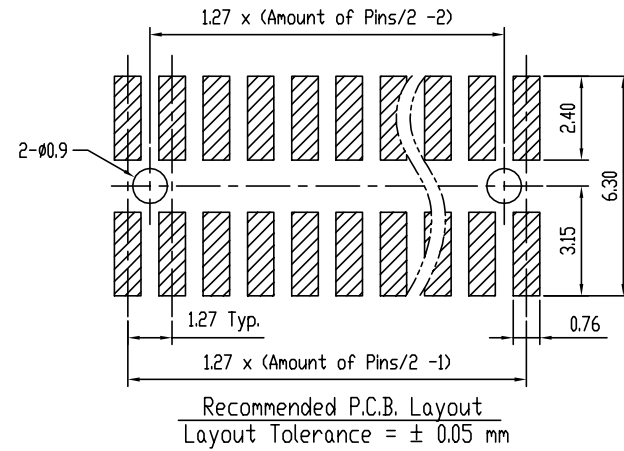

mat'l. code	surface ISO1302	tolerance ISO1101 ISO406	projection MM	product family MINITEK
ltr ecn nodr	date	tolerances unless otherwise specified	MM	1.27X1.27MM BTB STACK HD VT, SMT
A T10-0088 S.LIN	07/15/10	0.X $\pm$ 0.38	scale 5:1	dwg no
B BX-W-011534 ZK	05/04/12	0.XX $\pm$ 0.25		sheet of 1
		0'±2' 0.XXX±0.15		size A4
dr	STERLING LIN	07/15/10		20021832
eng	STERLING LIN	07/15/10		type
chr	STERLING LIN	07/15/10		Product Customer Drawing
app	GARY HSIEH	07/15/10		
sheet index	revision sheet	B 1		