

5

4

3

2

1



Description: 50 Ohm BNC T adapter
 Part No: 27-8141
 Application: Adapter
 Crimp Tool: N/A
 Impedance: 50 Ohms
 Frequency Range: 0-4 GHz
 Material: Body Zinc Nickel plated
 Contact Beryllium Gold plated
 Insulator PE
 RoHS Compliance: Yes
 Technical Detail: Refer to Emerson Document P/N 27-0000

DRAWING NO. 27-8141-CUST	
REVISIONS	
01	OFFICIAL RELEASE
	03-11-09 J J T T
02	CHANGE INSULATOR MATERIAL FROM TPX TO PE
	06-30-11 L H M

D


D

C

C

B

B

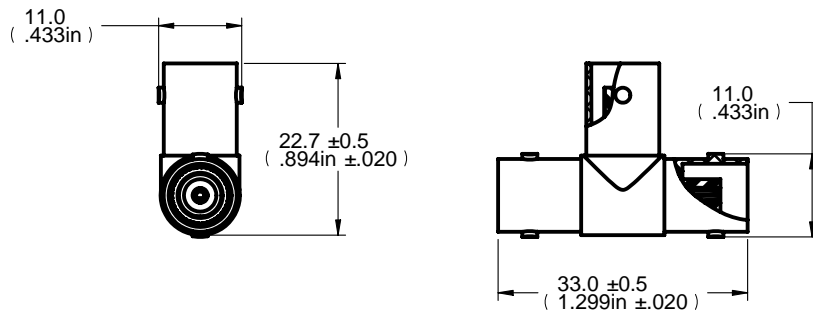

DIM OUTLINE

CUSTOMER COPY

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY Wencan Li	DATE 06-30-11
DECIMALS	mm	CHECKED BY Hu Yuge	DATE 06-30-11
X	± 0.5	APPROVED BY Ma Lin	DATE 06-30-11
X.X	± 0.3		
X.XX	± 0.1		
ANGLES	± 0.5°	U/M mm	

 cinch <small>CONNECTIVITY SOLUTIONS</small> <small>a bel group</small>	
TITLE 50 OHM BNC T ADAPTER	
SHEET 1 OF 1	DRAWING NO. 27-8141-CUST
SIZE A	

THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.

for evaluation on

5

4

3

2

1

A

A