## **ASG-P Series**

RoHS Compliant



7.0 x 5.0 x 1.9mm

Moisture Sensitivity Level (MSL) - This product is Hermetically Sealed and not Moisture Sensitive; therefore MSL = N/A (Not Applicable)

#### **FEATURES:**

- ASG series is a High Performance crystal based oscillator; available either as an XO or a VCXO
- Frequency range from 10MHz to 250MHz with LVCMOS output
- Available from 10MHz to 1.50GHz with LVDS or LVPECL output
- Offered with either 2.50V or 3.30V bias voltage
- Quick turn, 1~5 business days for small quantity orders

#### **APPLICATIONS:**

- Networking, SONET/SDH
- WiMax / WLAN
- Computing
- Phase Locked Loops
- Direct Digital Synthesis (DDS)
- DSL/ADSL
- · Base Terminal Stations

### **STANDARD SPECIFICATIONS:**

Parameters			Minimum	Typical	Maximum	Units	Notes
Б		$V_{dd} = 3.3V$	10		1500	MHz	
Frequency Range:	Ì	$V_{dd} = 2.5V$	10		1500	MHz	
Operating Temperature:		-40		+85	°C		
Storage Temperature:			-55		+125	°C	
Overall Frequency Stability:			-50		+50	ppm	See Note # 1
Initial Set Tolerance			-5.00	≤±1.00	+5.00	ppm	
Stability over operating temperature			-35.00	≤±20.00	+35.00	ppm	
Aging @ 25°C over 10-years			-7.00		+7.00	ppm	
Frequency variation over supply voltage change (±5%)			-2.00		+2.00	ppm	
Frequency variation over load variation $(15pF \pm 5\%)$		-1.00		+1.00	ppm		
Supply Voltage (V	/dd)·	$V_{dd} = 3.3V$	3.135	3.300	3.465	V	
	uu).	$V_{dd} = 2.5V$	2.375	2.500	2.625	V	
Input Current:		$V_{dd} = 3.3V$		< 54	60	mA	Frequency dependent
		$V_{dd} = 2.5V$		< 50	60	mA	Frequency dependent
LVPECL Output (Out & Out):	Output High Voltage $V_{\mathrm{OH}}$		V <sub>dd</sub> - 1.03		V <sub>dd</sub> - 0.60	V	$ m V_{OH}$
	Output Low Voltage $V_{\rm OL}$		V <sub>dd</sub> - 1.85		V <sub>dd</sub> - 1.60	V	$ m V_{OL}$
	Differential Duty Cycle		45	48/52	55	%	$\mathrm{DODC}_{\mathrm{LVPECL}}$
	Rise Time		150		350	ps	$t_{R}$
	Fall Time		150		350	ps	$t_{\mathrm{F}}$
Start-up Time:				<b>≤</b> 2.0	3.0	ms	
Enable/Disable Function :			"1" ( $V_{IH} \ge 0.7*Vdd$ ) or Open: Oscillation "0" ( $V_{IL} < 0.3*Vdd$ ) : High Z				
Vcontrol Range			0.00		Vdd	Volts	For VCXO
Frequency Pull			±50			ppm	
Control Port Bandwidth			10			kHz	
		Integer Mode		< 0.60	1.60	ps	12kHz to 20MHz
- [ 3 ( ) ]		Fractional Mode		< 0.90	1.60	ps	12kHz to 20MHz

Note #1: Inclusive of initial tolerance at 25°C±3°C, operating temperature range, input voltage variation, load variation & aging.

*Note* #2: The rms jitter over 12kHz to 20MHz Bandwidth is dependent on the carrier and whether or not the final frequency is achieved without engaging the Fractional Mode






**ASG-P Series** 






### OVERALL SYSTEM BLOCK DIAGRAM

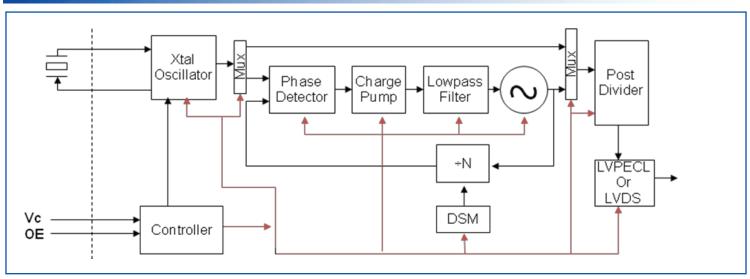


### PHASE NOISE & JITTER CHARACTERISTICS

#### 622.88MHz Carrier

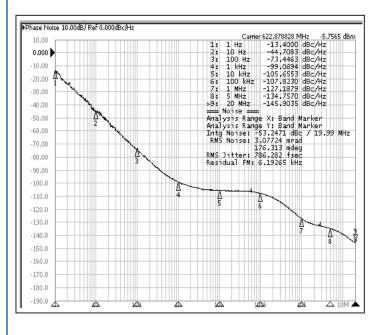

#### 1.50GHz Carrier

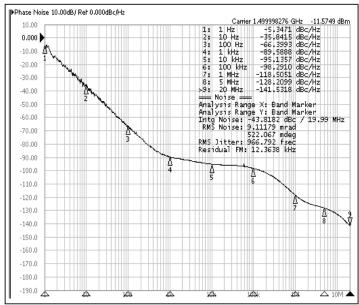



**ASG-P Series** 







7.0 x 5.0 x 1.9mm




### FREQUENCY PULLING VS. CONTROL VOLTAGE (VCXO MODE)




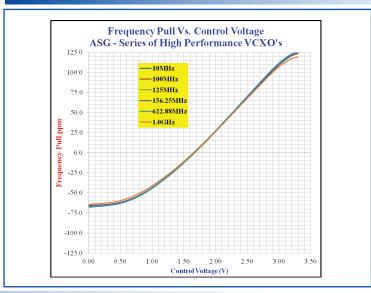

#### > PART IDENTIFICATION:

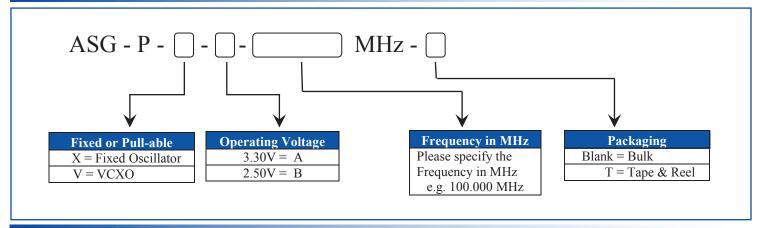

### **► MARKING:**

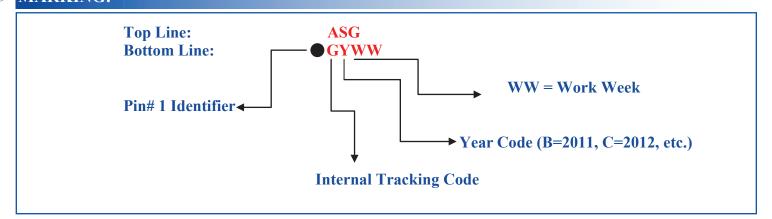



**ASG-P Series** 







### **OUTLINE DIMENSIONS:**

Pin #	Pin Description For VCXO configuration			
1	Voltage Control for VCXO			
2	Output Enable (OE)			
3	GND			
4	RF Output			
5	RF Output			
6	Vdd			

Pin #	Pin Description For XO configuration			
1	Output Enable (OE)			
2	N/C for XO			
3	GND			
4	RF Output			
5	RF Output			
6	Vdd			

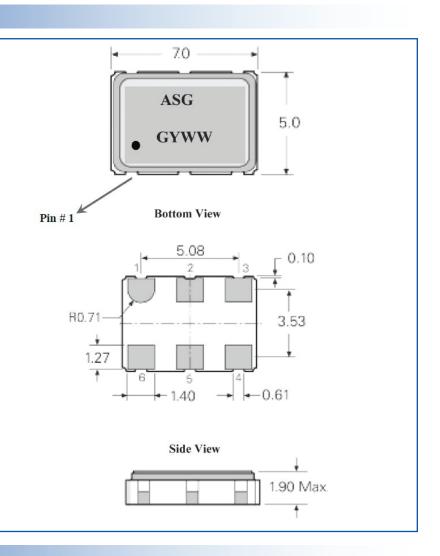

## **REFLOW PROFILE:**

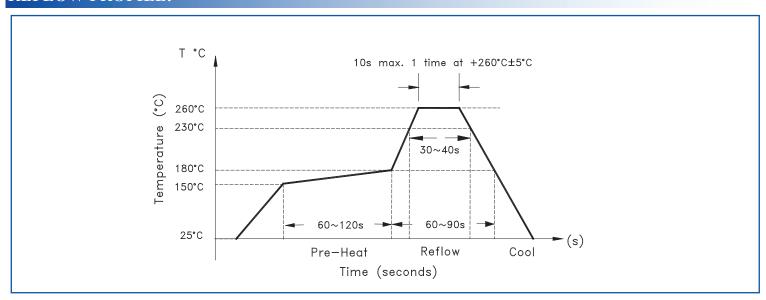






**ASG-P Series** 





### **TAPE & REEL:**

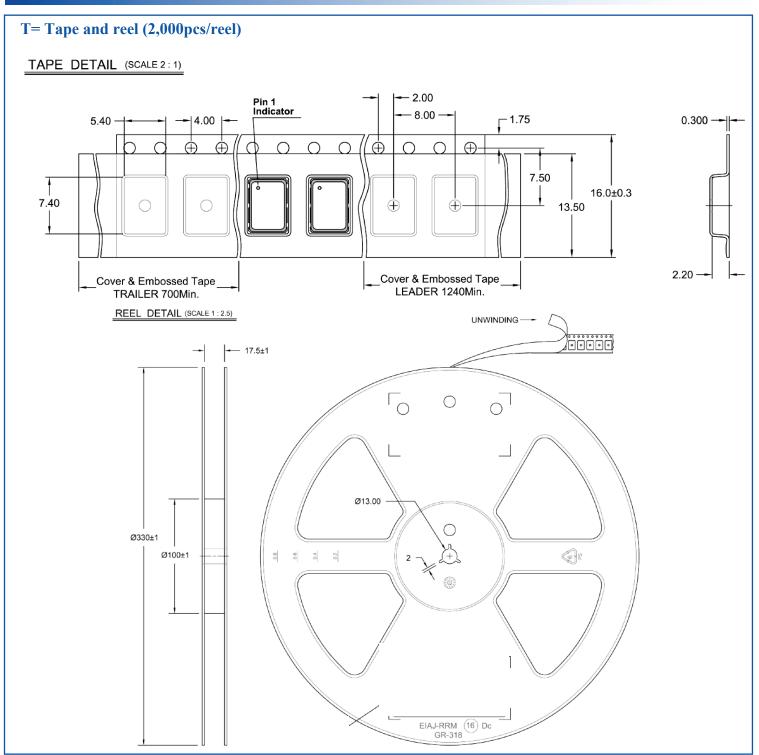

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.