


PRODUCT NUMBER
10087119-YXXLF



LATCHING _____
 0= WITHOUT LATCH
 1= STANDARD LATCH
 2= LOW PROFILE LATCH

RoHS COMPATIBLE, SEE NOTE 9
 PIN STYLE SEE SHEET 2

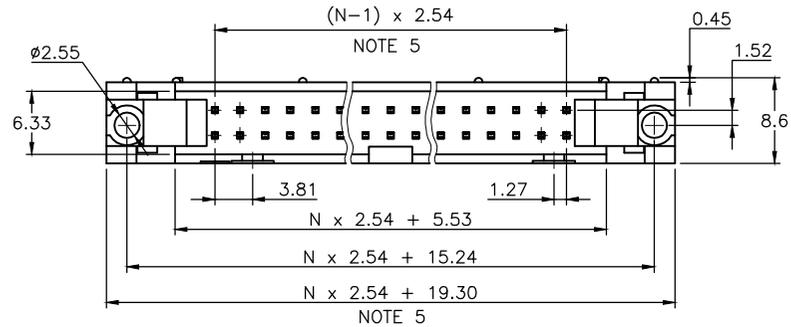

NOTES:

- 1 - HOUSING MAT'L : GLASS FILLED THERMOPLASTIC. UL94V-0 COLOR: GREY
- 2 - PIN MATERIAL : BRASS
- 3 - PRODUCT PACKAGED IN TUBES
- 4 - 40N MIN LATCH RETENTION FORCE AT FIRST EXTRACTION
- 5 - TO DETERMINE DIMENSIONS :
 N = NUMBER OF POSITIONS PER ROW
 EXAMPLE : 8 POS N x 2.54 = 20.32mm
- 6 - NO CENTRAL SLOT ON POSITIONS 6 & 8
- 7 - NO LEFT POLARIZATION ON POSITIONS 06, 08, 10, 14.
- 8 - NO GROOVE ON POSITIONS 06, 08, 10, 14, 30, 34
- 9 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - c - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-47-0004

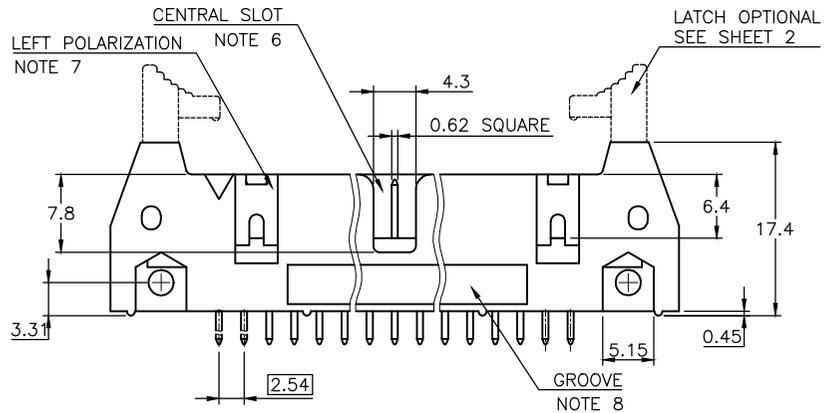

mat'l. code		surface		tolerance		projection		product family	
		ISO 1302 ✓		ISO 406 ISO 1101		mm		QUICKIE	
ltr		ecn no dr date		tolerances unless otherwise specified		mm		title	
A		F08-0149 LMU 08.03.27		.X ±0.3		mm		QKIE HEADER	
B		B-20412 BVE 15.03.10		.XX ±0.13		mm		STR 0.05µm Au	
				.XXX ±0.05		scale 2:1		dwg no	
				dr J.COMPAGNON 08.03.07		FCJ		sheet 1 of - size	
				enr L.MULIN 08.03.07				10087119 A3	
				chr				type	
				appd L.MULIN 08.03.07				CUSTOMER Drawing	
sheet index		revision sheet		B A					
		1 2							

