


TITLE: RECEPTACLE, 4 PIN, AT SERIES, SOLID REAR SEAL, END CAP


AT04-4P-SS01XXX


REV:

· A3

SH.



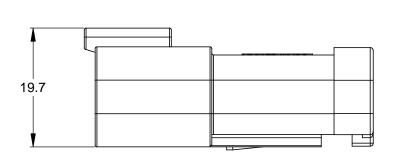

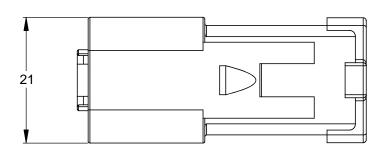


## NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER

- 2. MODIFICATIONS: SOLID REAR SEAL; END CAP
- 3. SPECIFICATIONS:
  - 3.1 CURRENT RATING: 13 AMPS
  - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
  - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
  - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
  - 3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
  - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
  - 3.7 RoHS COMPLIANT
- MATING PART: AT06-4S\* PLUG
  (\* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

PART NUMBER CHART	
COLOR	PART NUMBER
GREY	AT04-4P-SS01
BLACK	AT04-4P-SS01BLK
BLUE	AT04-4P-SS01BLU
BROWN	AT04-4P-SS01BRN
GREEN	AT04-4P-SS01GRN
RED	AT04-4P-SS01RED
WHITE	AT04-4P-SS01WHT
YELLOW	AT04-4P-SS01YEL

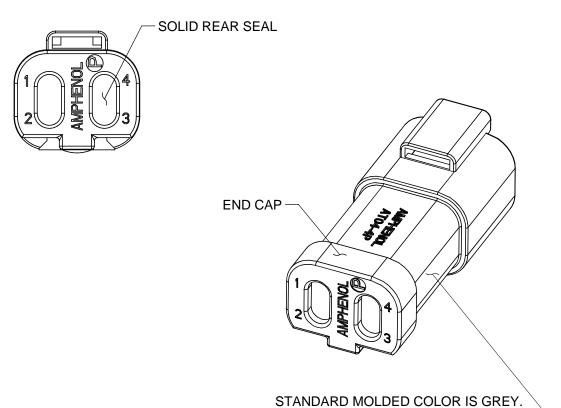

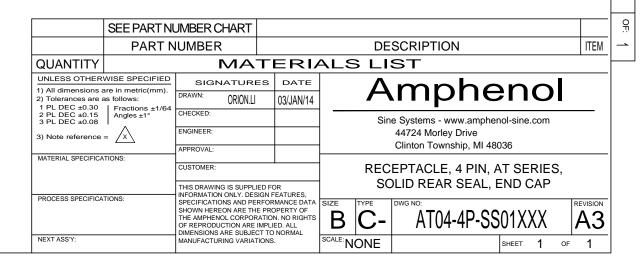

ADDITIONAL COLORS SHOWN IN PART NUMBER CHART ARE AVAILABLE VIA SPECIAL ORDER.