

MODEL NUMBER
ADT-2733-MF-3MM-02

NOTES:

1.0 MATERIALS:

- 1.1 HOUSING & NUT: STAINLESS STEEL PER ASTM-A582, TYPE 303.
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, PER ASTM-B196.
- 1.3 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1710

2.0 PLATING:


- 2.1 HOUSING & NUT: PASSIVATED PER MIL-F-14072 AND QQ-P-35
- 2.2 CENTER CONTACT: GOLD PER MIL-G-45204, TYPE II, CLASS 2.

3.0 ELECTRICAL SPECIFICATIONS:

- 3.1 FREQUENCY RANGE: DC to 26.5 GHz
- 3.2 VSWR (MAX.):
DC to 20 GHz: 1.10:1
20 to 26.5 GHz: 1.15:1

4.0 MARKING: MARK UNIT AS SHOWN

5.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

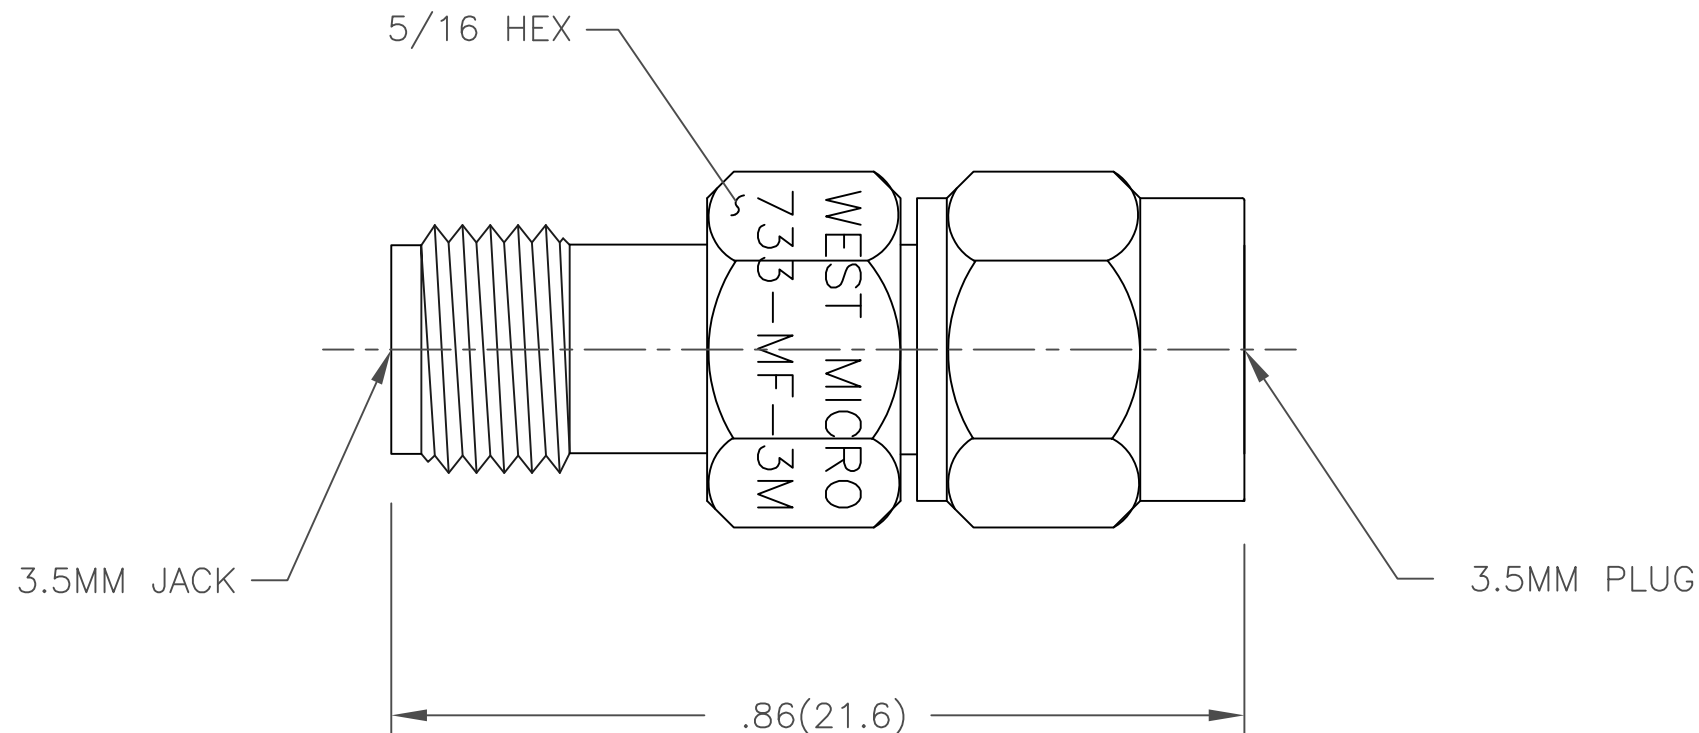

DWG NO. WAS: 05515-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	11/16/92
A	ECR 3700	7/2/85
B	ECR 6004	5/17/88
C	ECR 6545	7/13/89
D	REDRAW ON CAD	11/16/92
E	ECO 23315	2/23/11

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power. UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±2°	CAGE CODE 34078	MIDWEST MICROWAVE	
			TITLE ADAPTER - 3.5MM JACK TO 3.5MM PLUG OUTLINE DRAWING
DRAWN/DATE A.BEATTY 11/16/92	ENG./DATE A.OSGA 11/19/92	DRAWING NUMBER ADT-2733-MF-3MM-02-01	REV. E
CHECKED/DATE M.HOLLMAN 11/18/92	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1